

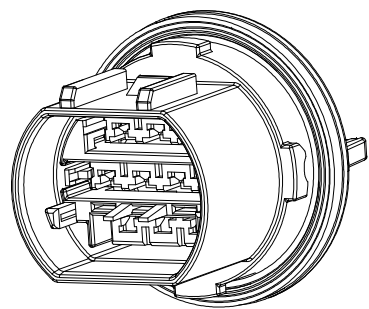
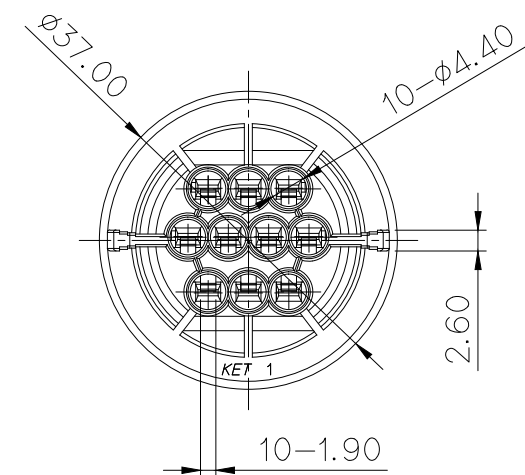
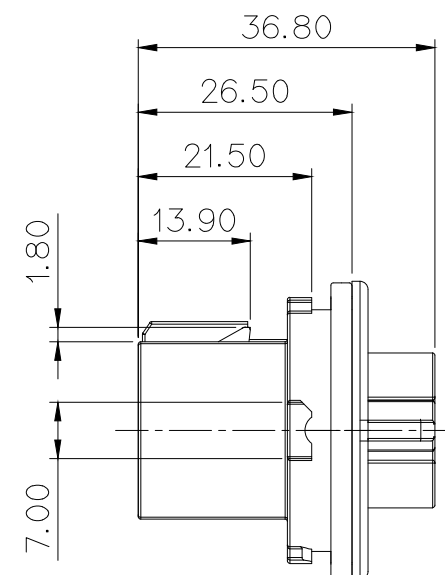
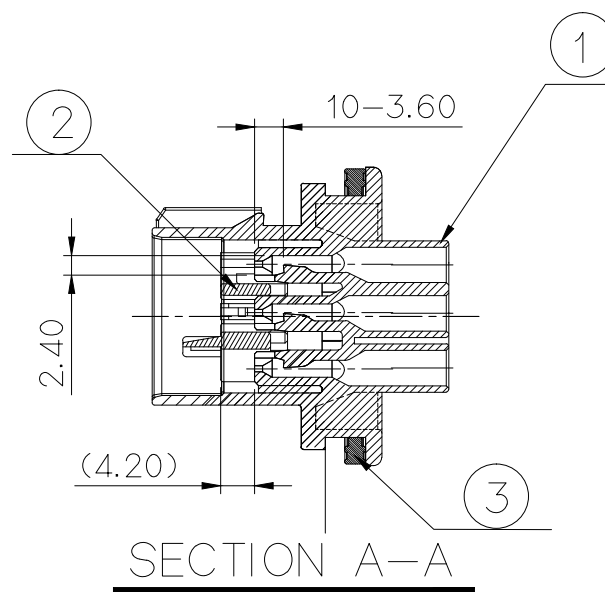


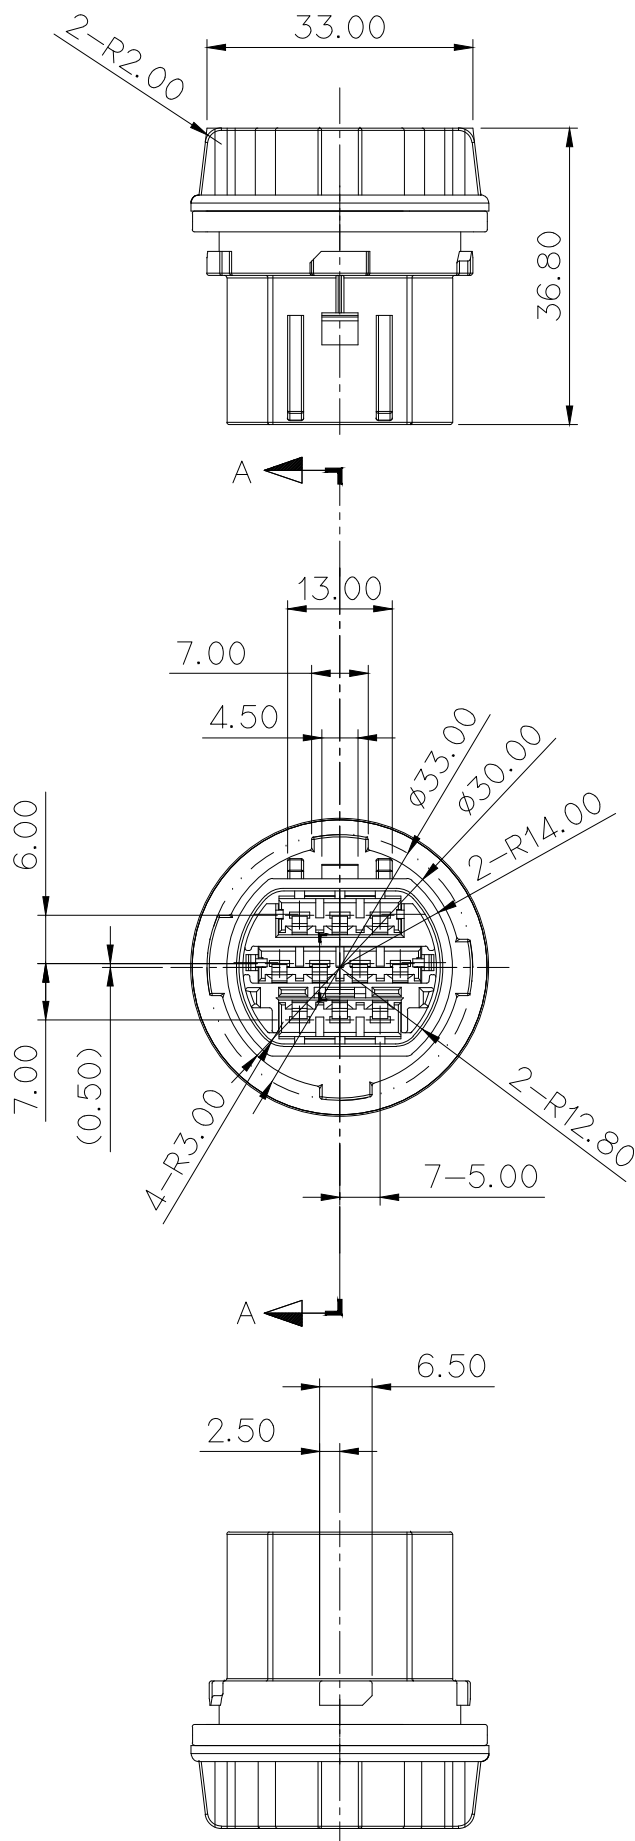

ISO VIEW

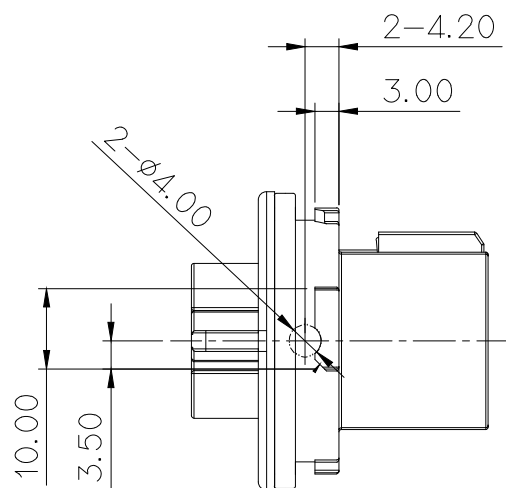

주 기

- 1.기능상 유해한 BURR 및 WELDLINE등이 없을것.
- 2.적용 TERMINAL: ST740999/ 1000/ 0687/ 0688
- 적용 WIRE SEAL : MG680274/ 0275/ 1474/ 3935
- 적용 DUMMY SEAL : MG683695
- 적용 FEMALE ASSY : MG643546

NOTE

- | |
|---|
| 1. MUST BE FREE OF BURR, WELDLINE
AND IMPERFECTION THAT AFFECT FUNCTION. |
| 2. APPLICABLE TERMINAL : ST740999/ 1000/ 0687/ 0688
APPLICABLE WIRE SEAL : MG680274/ 0275/ 1474/ 3935
APPLICABLE DUMMY SEAL : MG683695
APPLICABLE FEMALE ASSY : MG643546 |

GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

NO.	PART NO.	PART NAME	MATERIAL	FINISH
1	MG673547	HEAD LAMP 10M HOUSING	PBT	BLACK
2	MG673548	HEAD LAMP 10M FRONT HOLDER	PBT	NATURAL
3	R602061	HEAD LAMP 10M GASKET SEAL	SLICONE	RED



ISSUE MARK

					MATERIAL		SEE TABLE	 KOREA ELECTRIC TERMINAL CO., LTD.	
					FINISH		SEE TABLE		
					WIRE RANGE		CLASS		H/LAMP
					INSULATION		TYPE		.090
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE	PART NO.
DR.	HKS. 2007.03.09		CHK.	J.Y.S		03/09	SEE TABLE	1/1	MG653549-5
CHK.	 03/13		APP.			03/13	PART NAME		
HEAD LAMP 10M ASSY									