



NO.	PART NO.	PART NAME	MATERIAL	FINISH
1	MG673564	LIF 39F HOUSING(C TYPE)	PBT	NATURAL/GRAY
2	MG673172	LIF 39F SPACER		RED

GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	



SECTION B-B

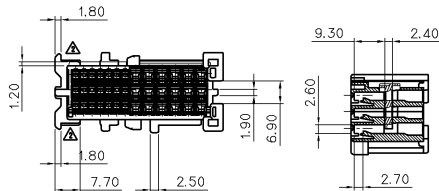

SECTION A-A

주 기

1. 기능상 유해한 BURR 및 WELDLINE 등이 없을 것.
2. 적용 TERMINAL(090): ST730775, 776, 777
적용 TERMINAL(040): ST730770, 960
적용 HOUSING: MG643174(DOOR), MG643206
적용 LEVER: MG633567
3. SPACER는 1차 조립 상태를 유지 할 것.
4. 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NOTE

1. MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE TERMINAL(090) : ST730775,776,777
APPLICABLE TERMINAL(040) : ST730770,960
APPLICABLE HOUSING: MG643174(DOOR), MG643206
APPLICABLE LEVER: MG633567
3. FRONT HORDER IS SUPPORT WITH THE 1st LOCK CONDITION.
4. HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.



					MATERIAL	SEE TABLE	KET KOREA ELECTRIC TERMINAL CO., LTD.
					FINISH	SEE TABLE	
△	주요부품명(S0802)7개도 목록명	MR		08.08.29	WIRE RANGE	CLASS	ASC + 040111
△	LEVER 부품명	MR	K.L	2005.09.14	INSULATION	TYPE	
LTR	REVISION RECORD	DR	CHK.	APP.	DATE	SCALE	PART NO. MG653563
DR.	KDJ.	2004.12.20				1/1	
CHK			CHK	APP.			
					PART NAME	LIF 39F HOUSING ASSY (C TYPE)	