


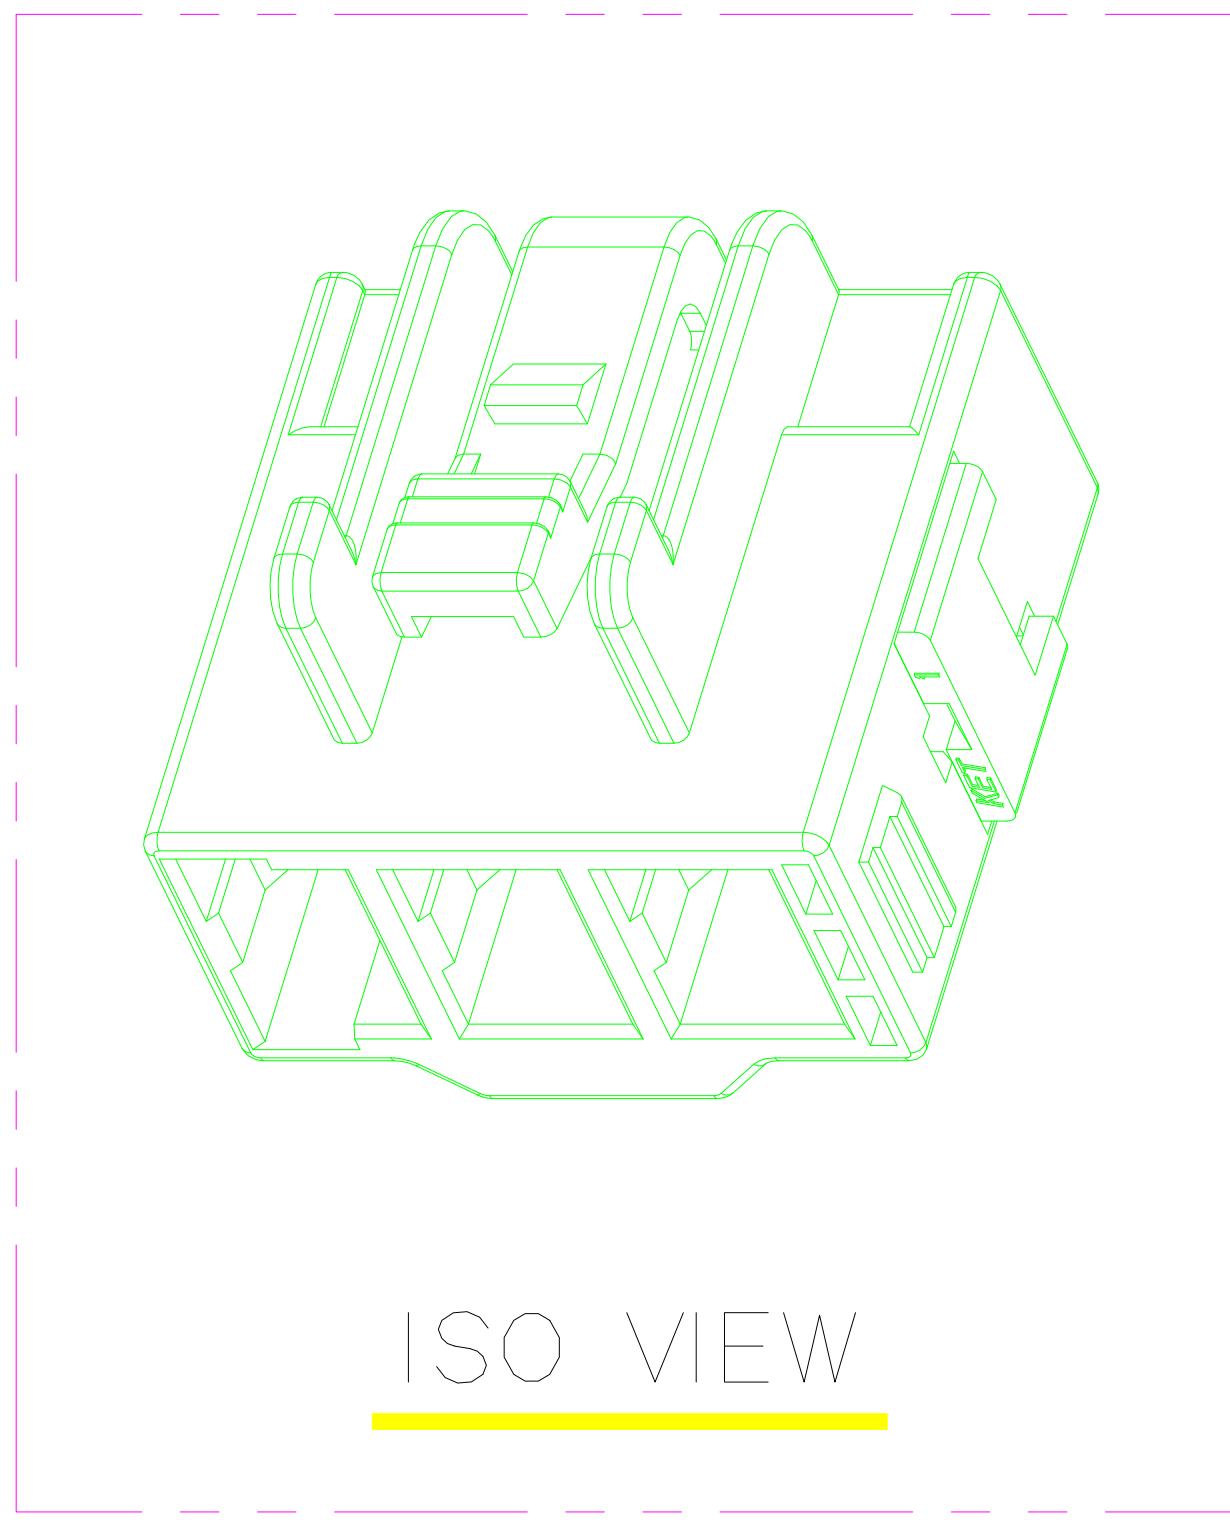
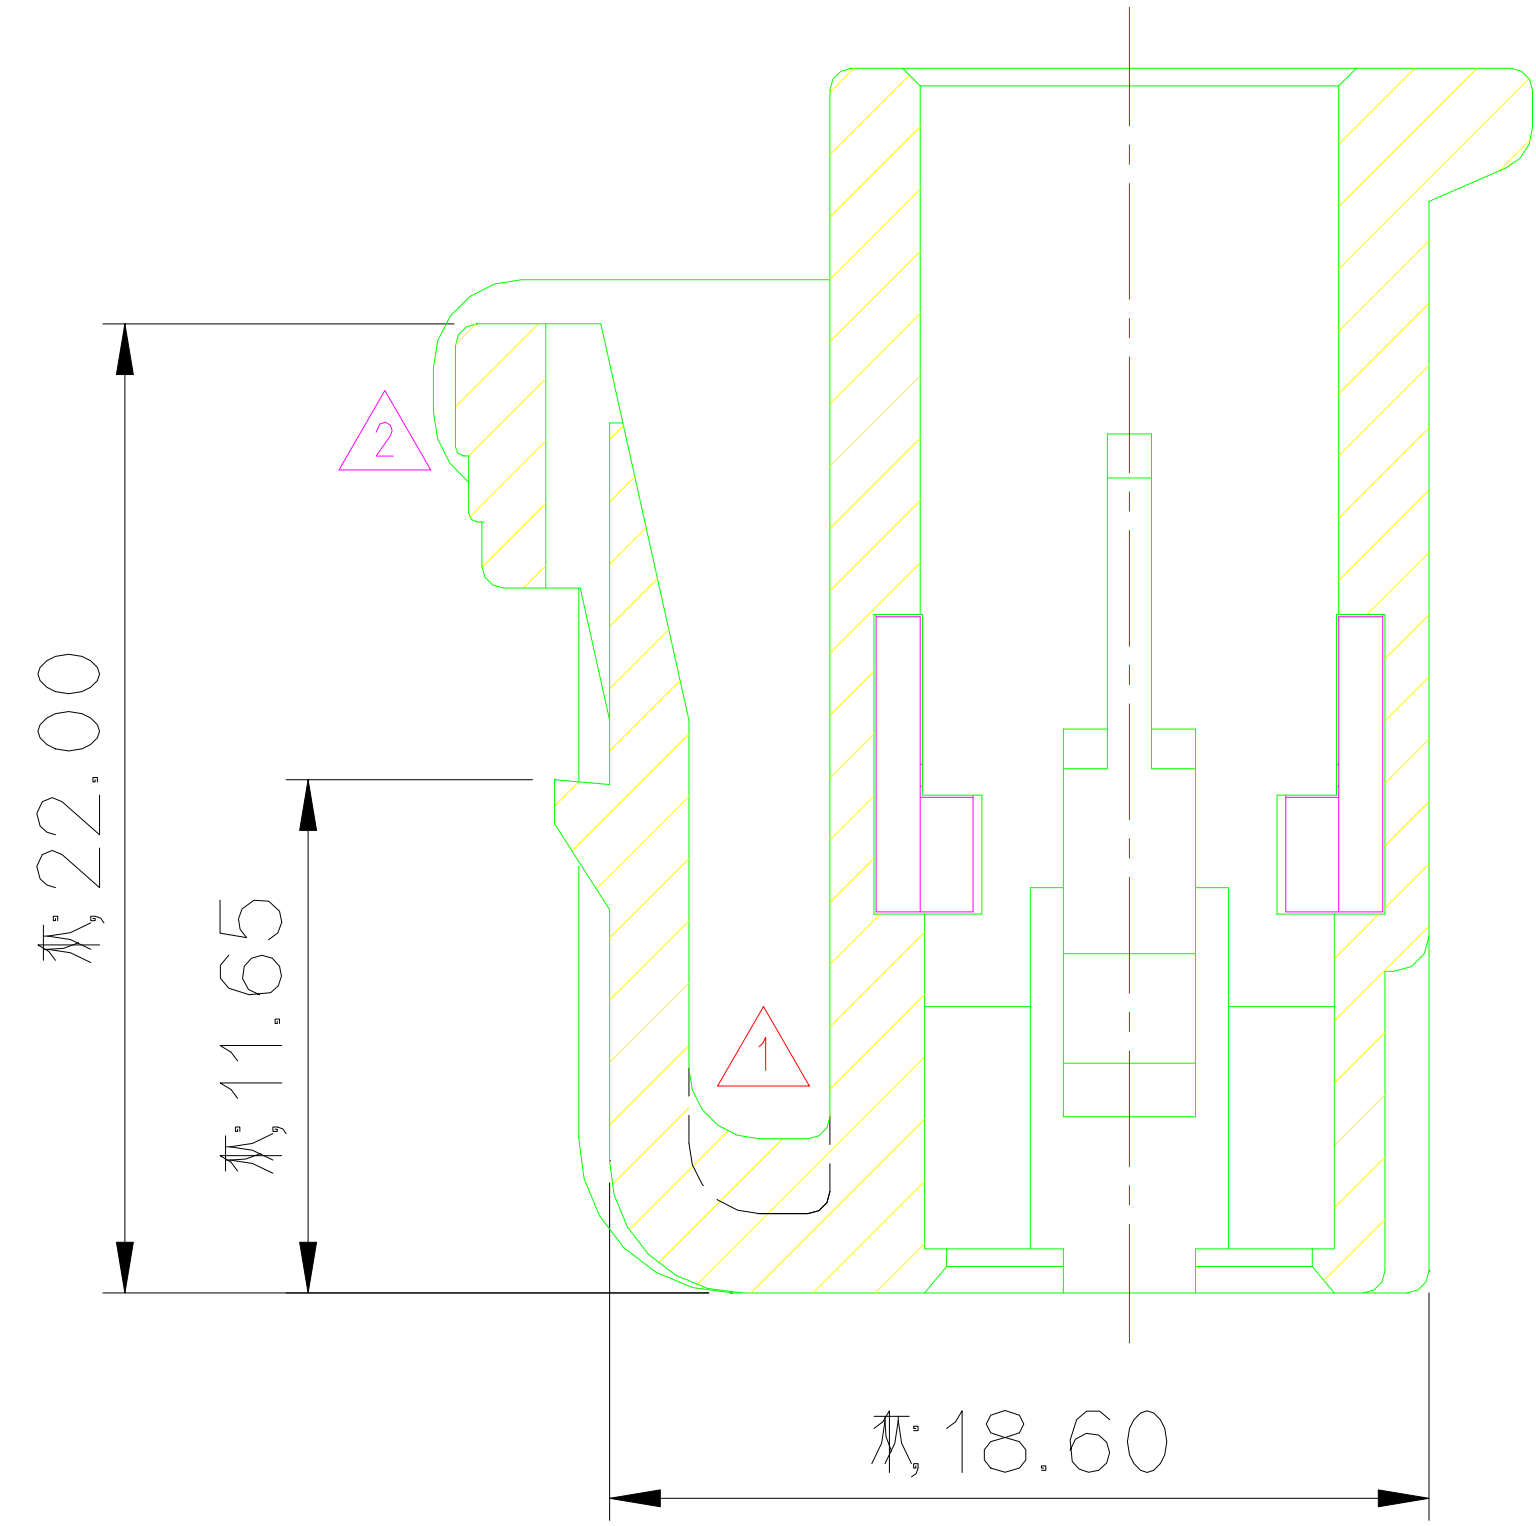
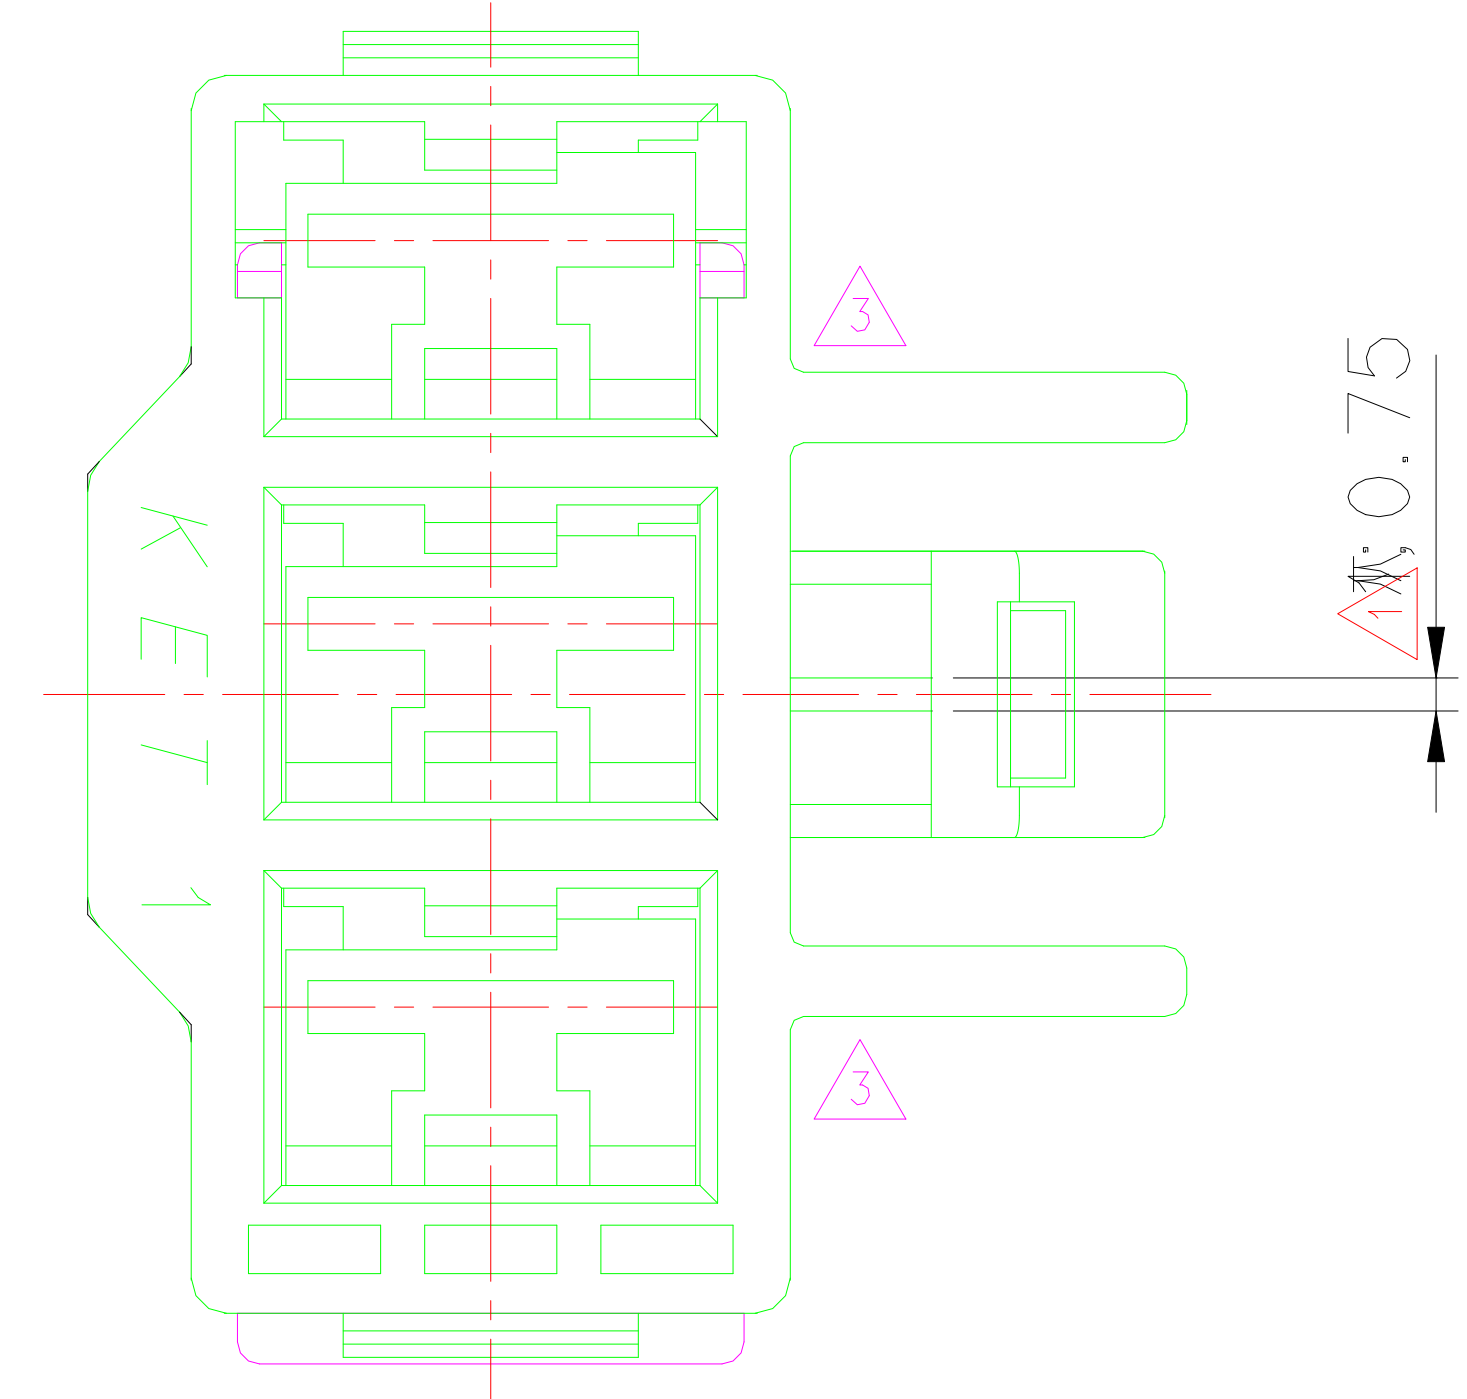


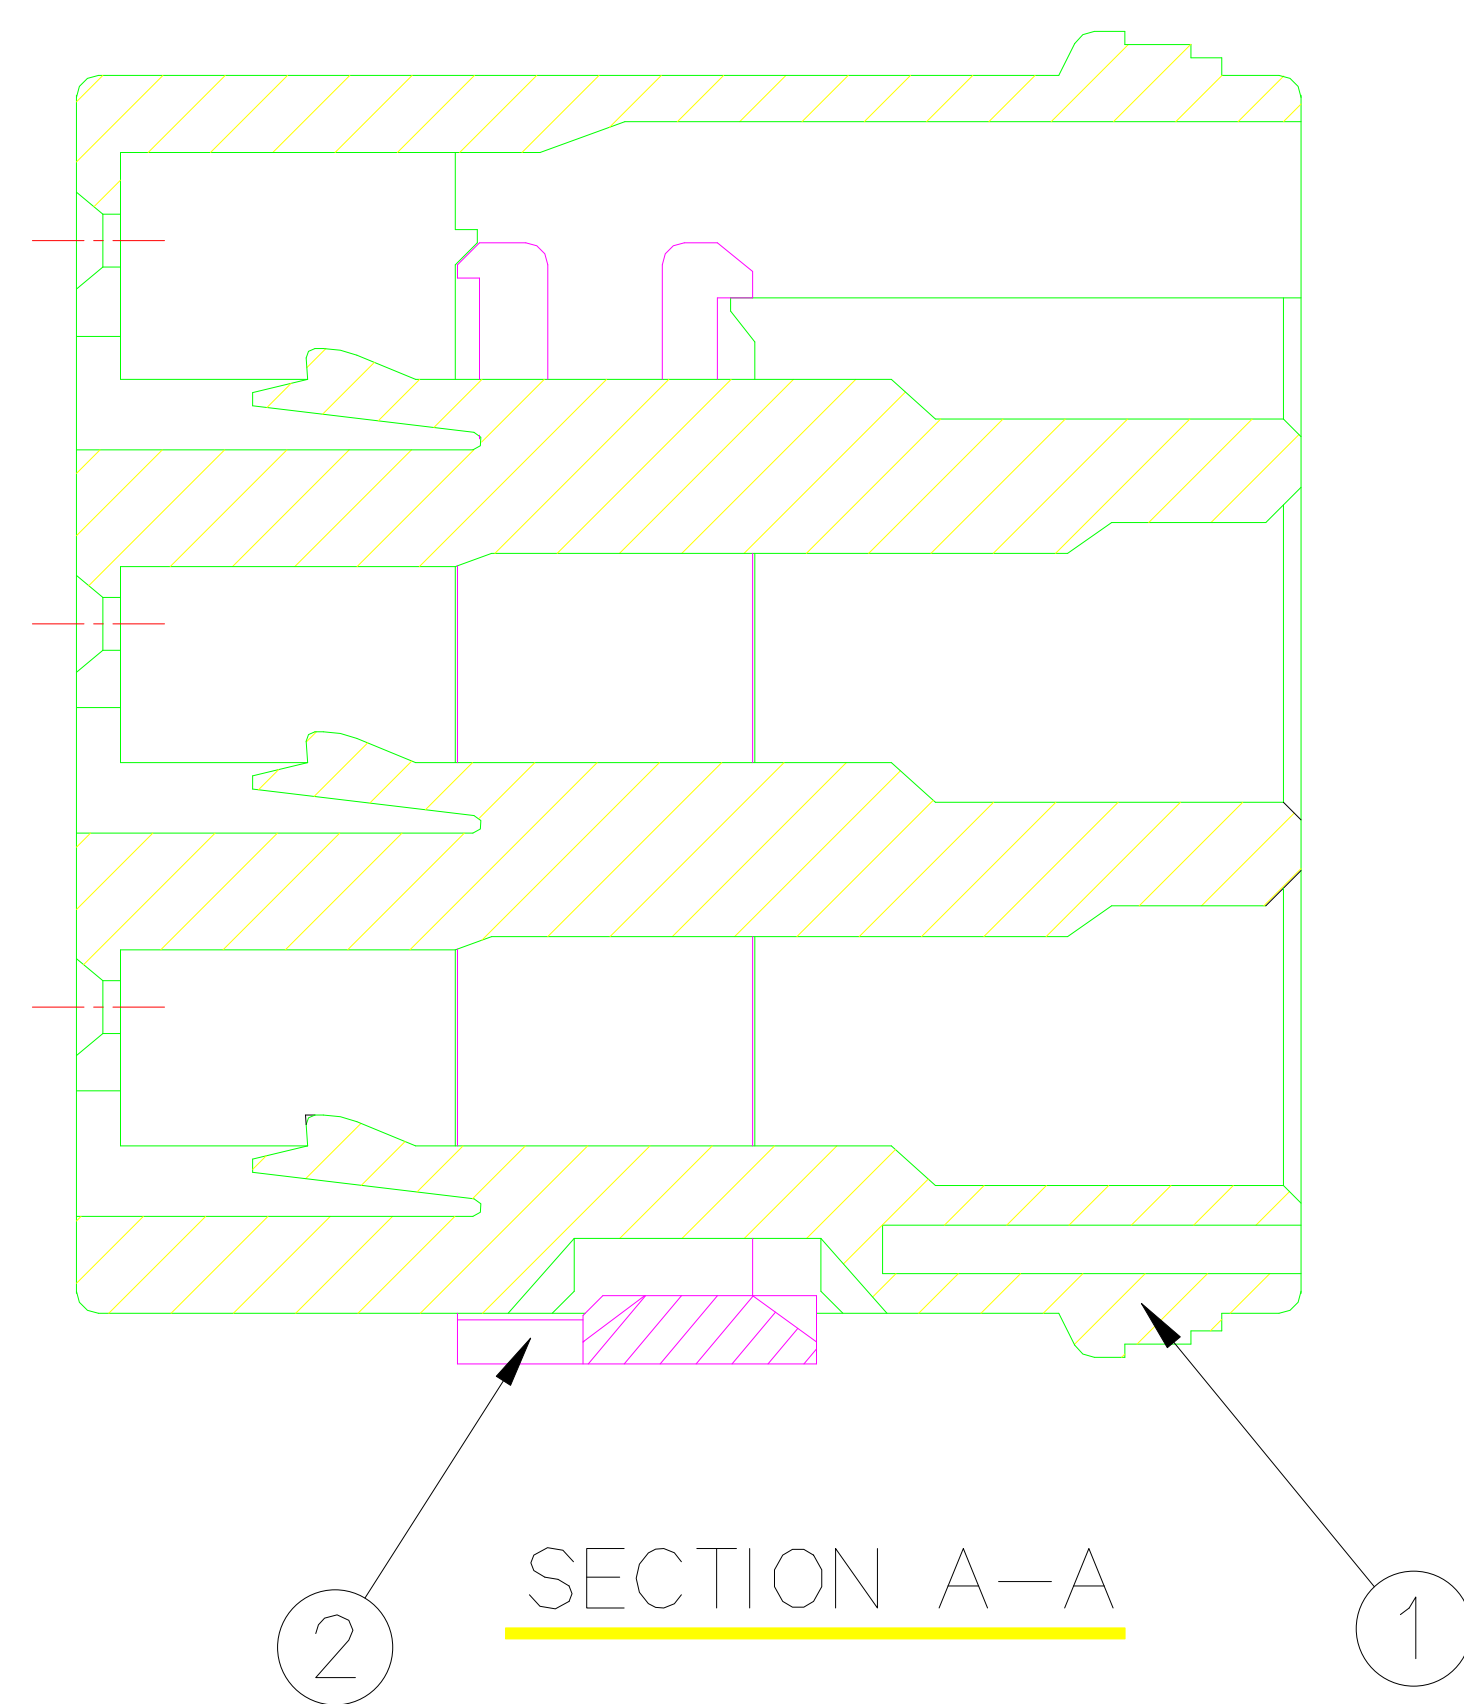

ISO VIEW

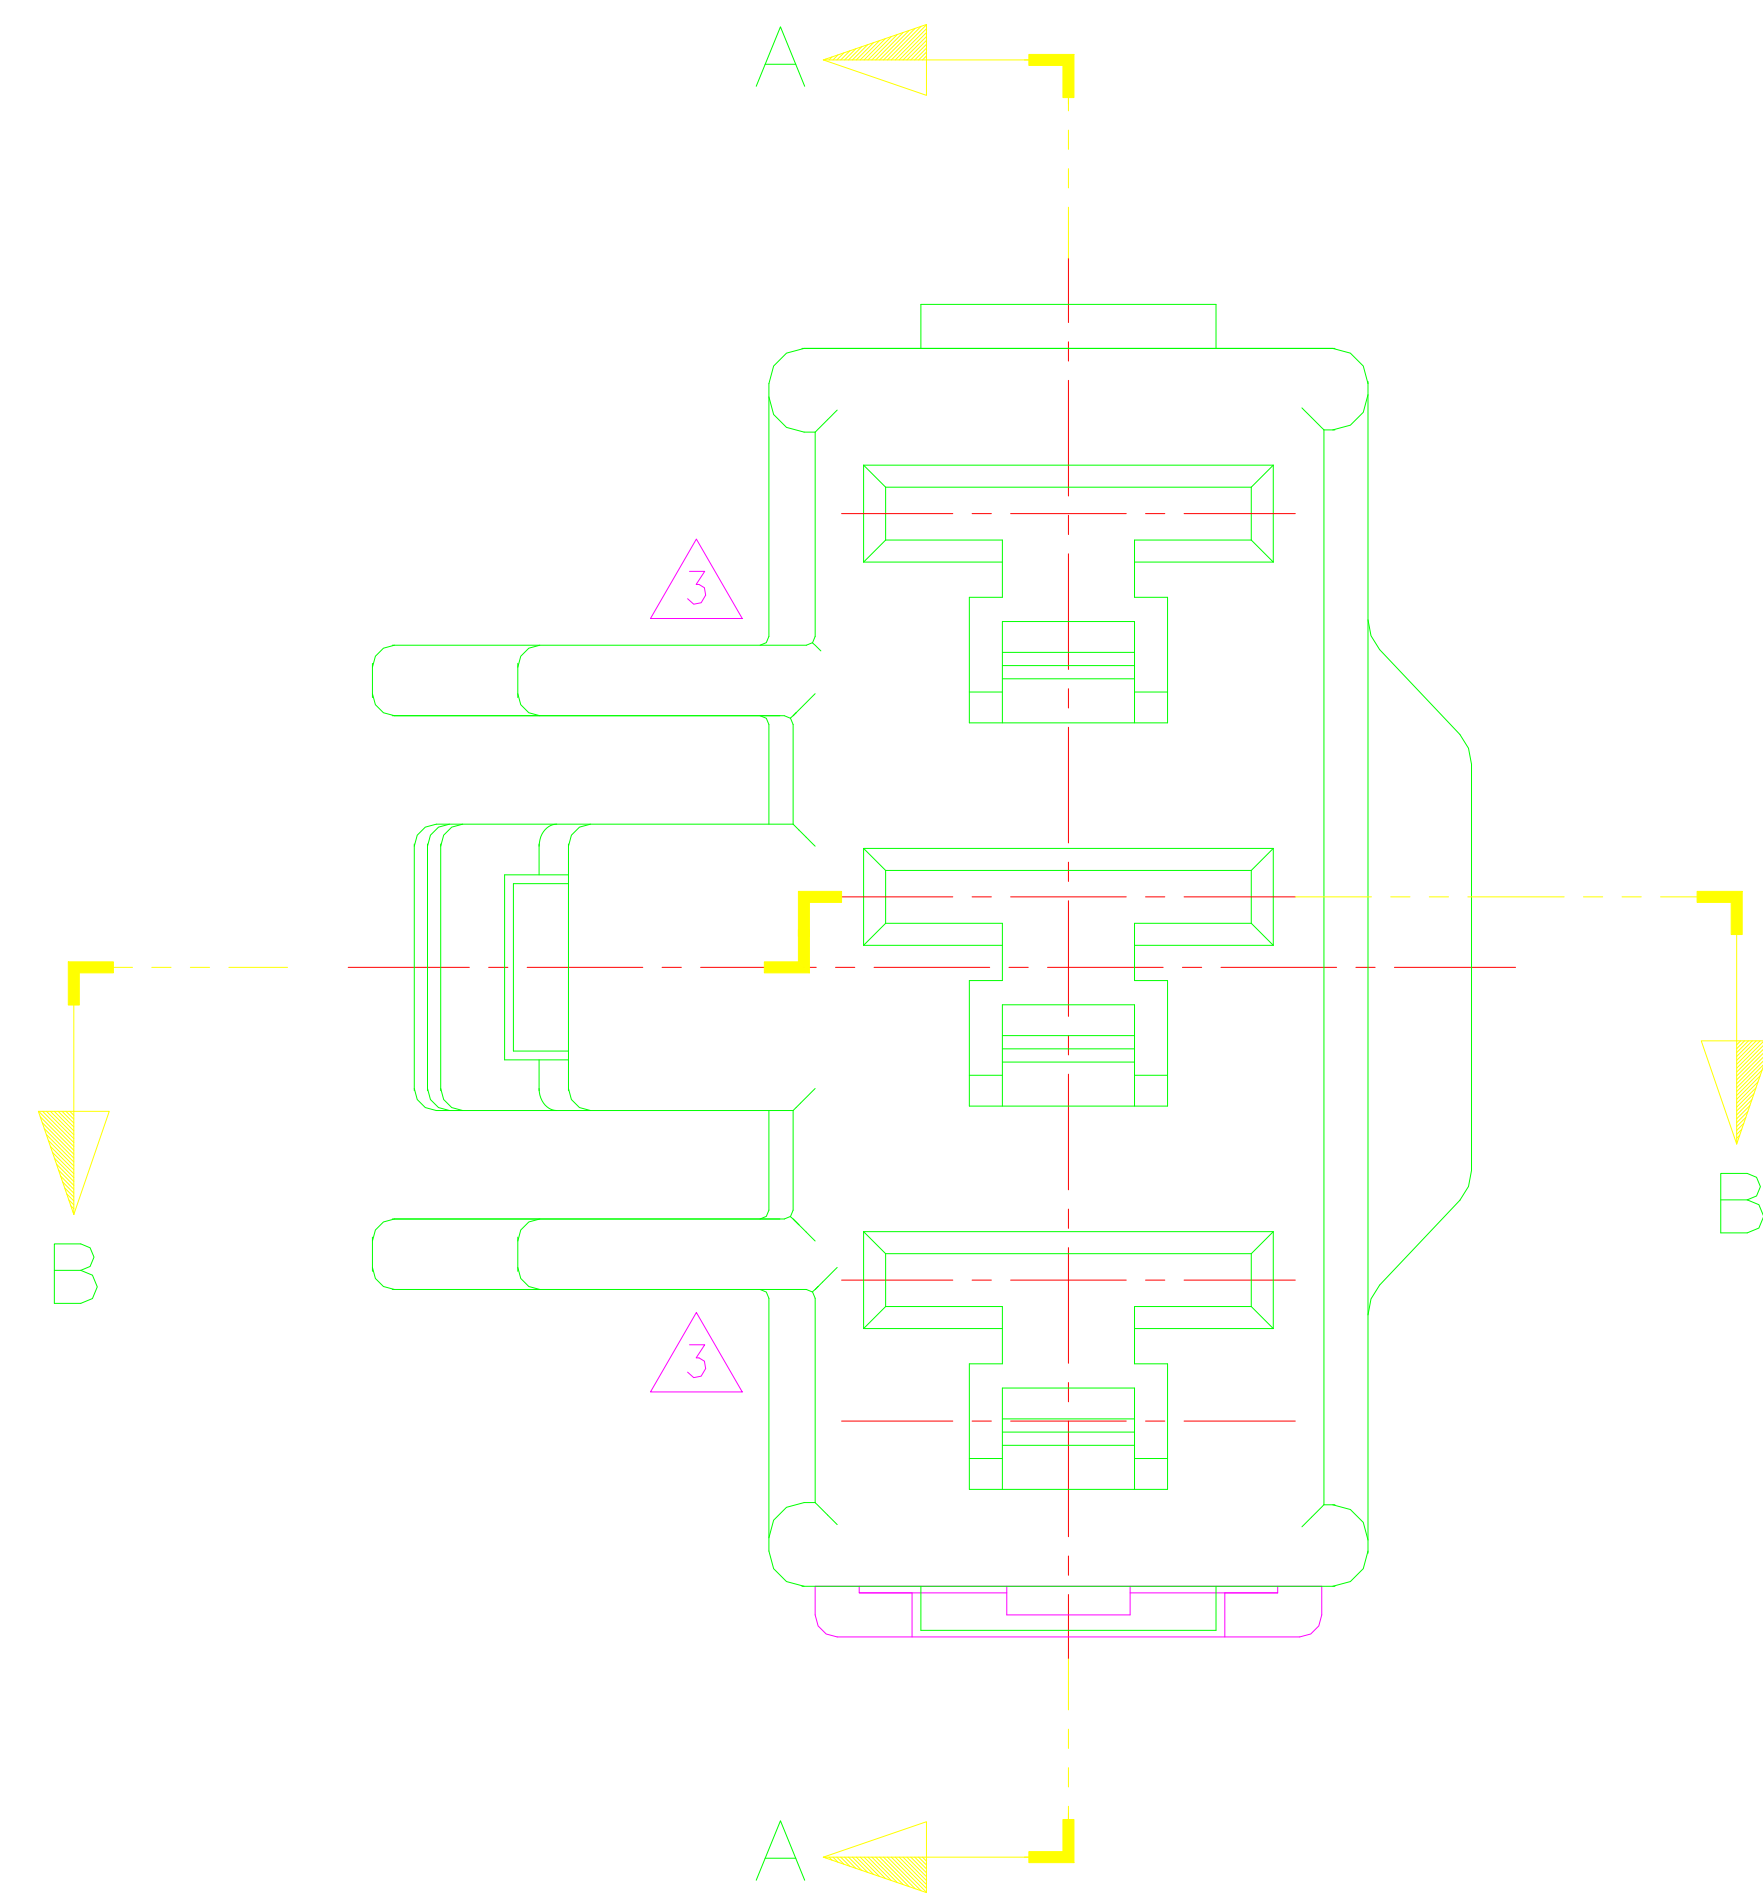

SECTION B-B

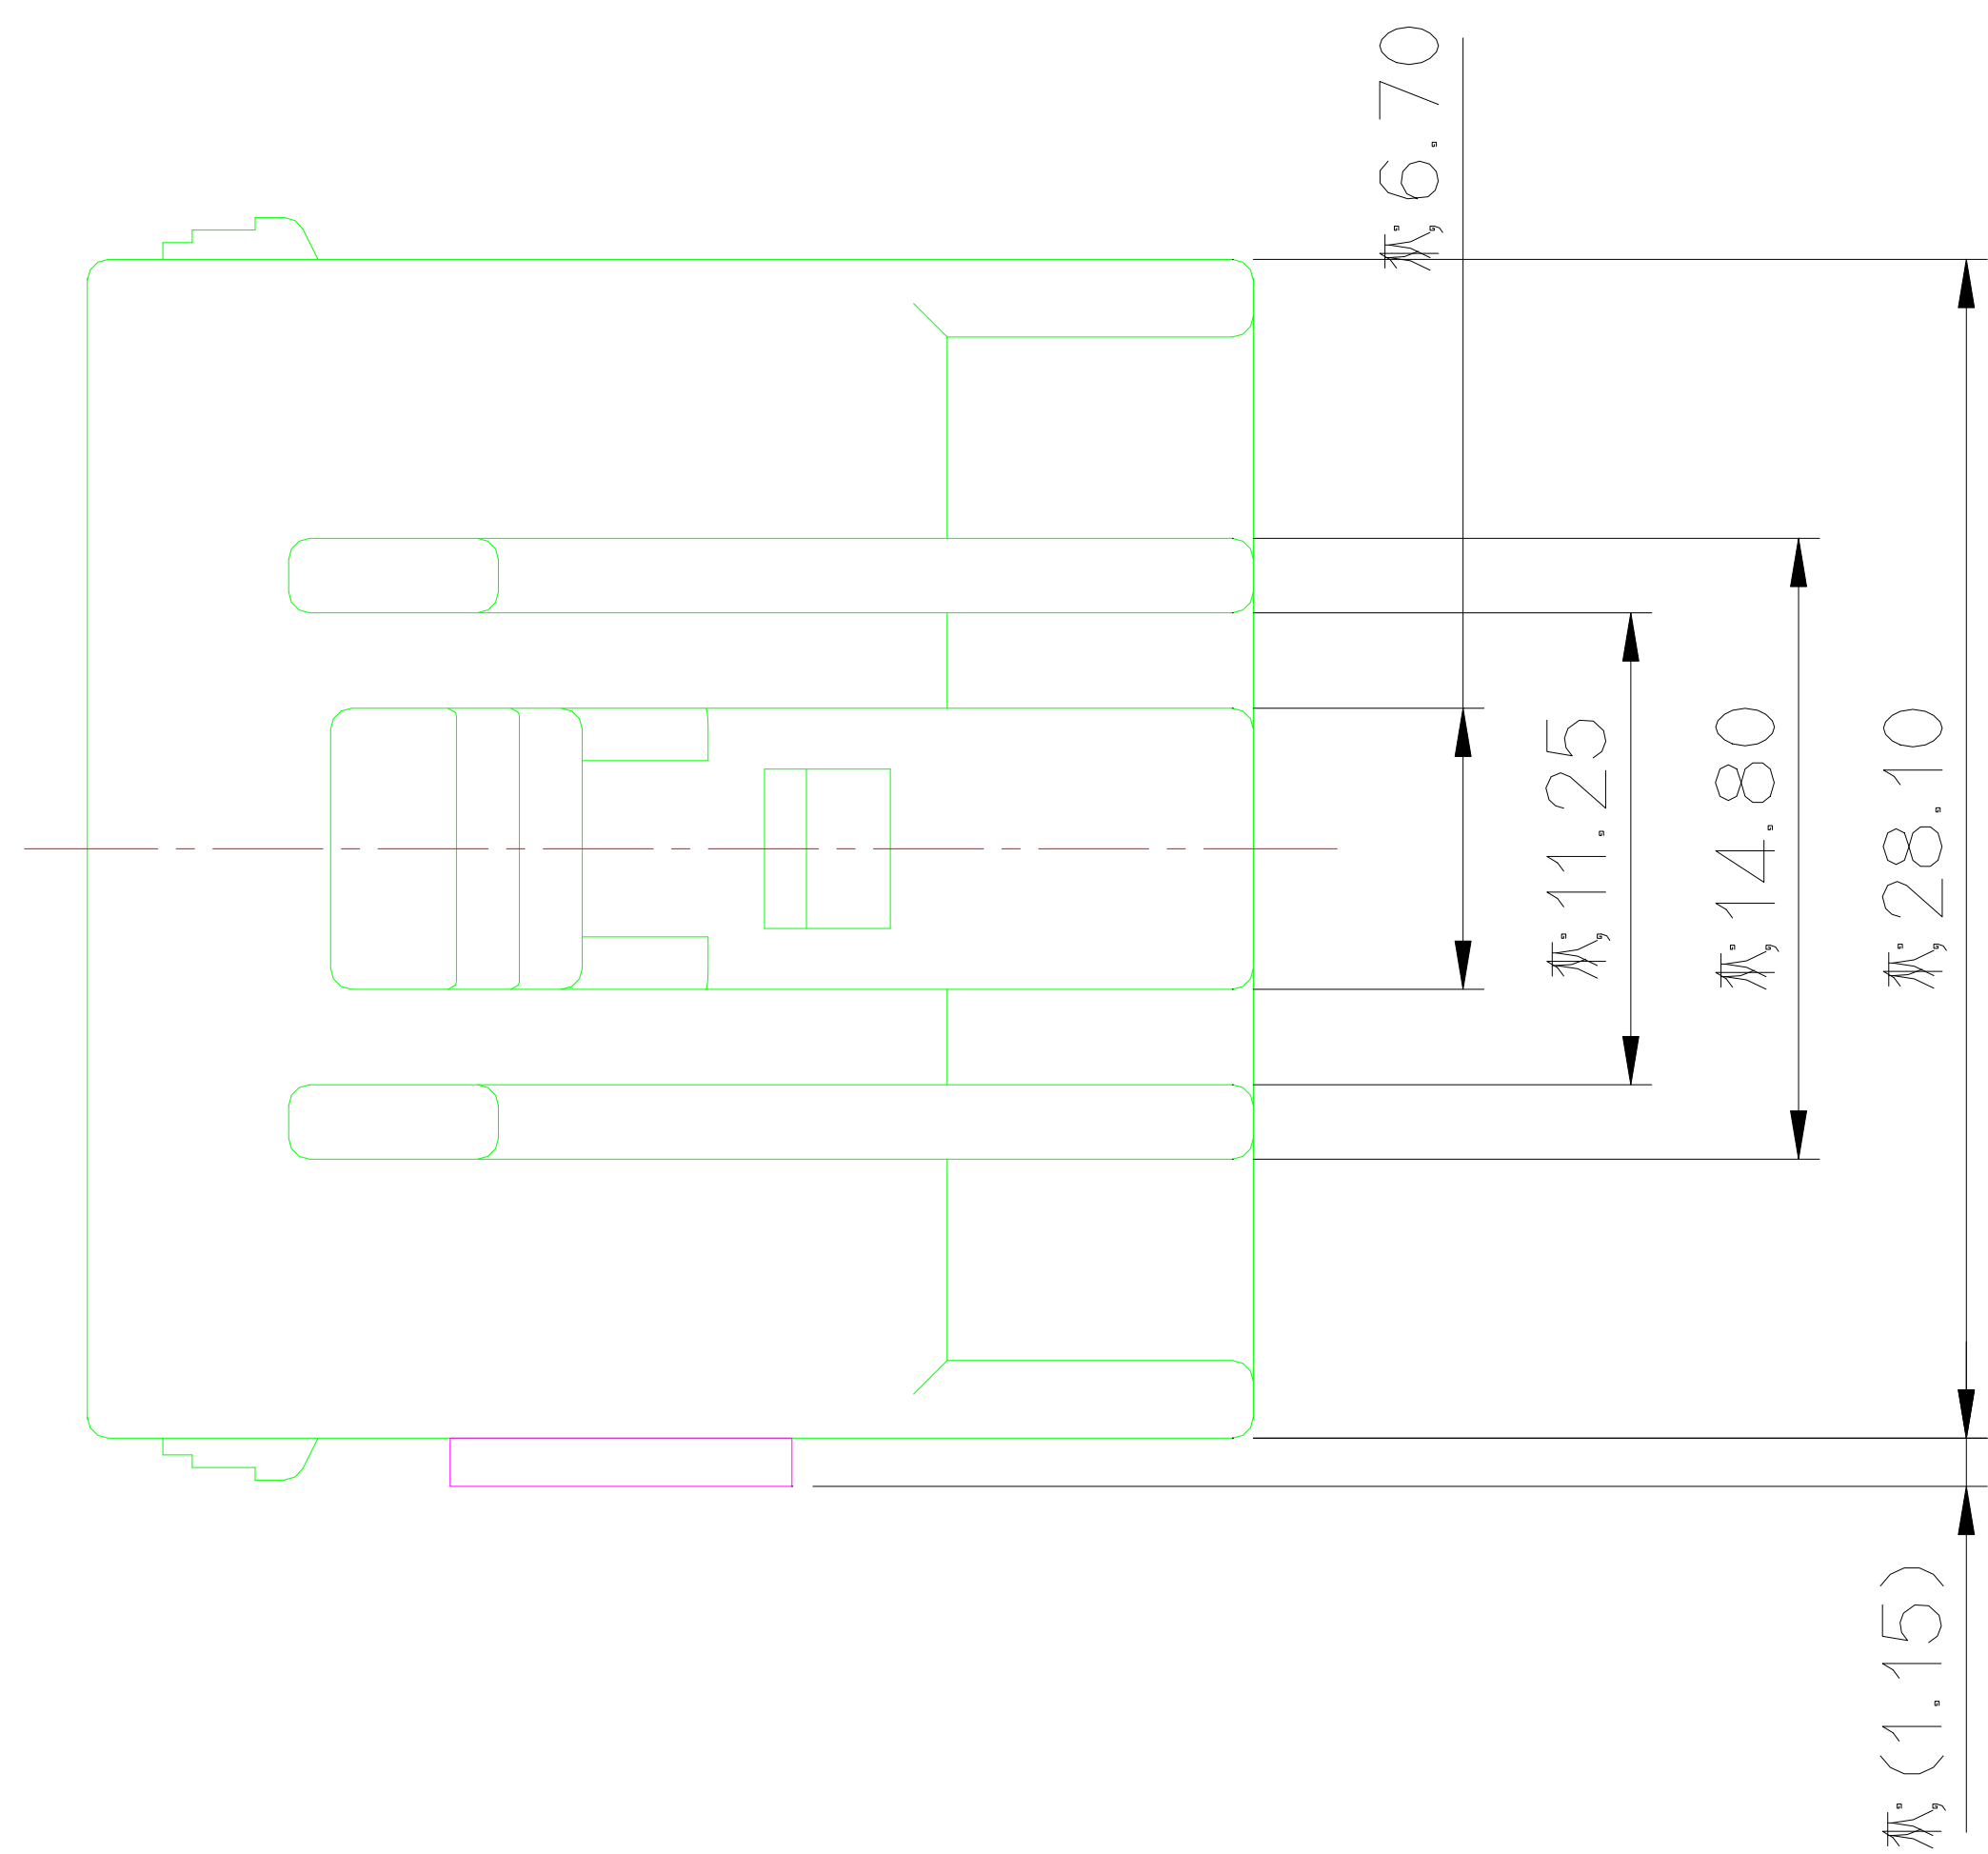

주 기


1. 기능상 유해한 BURR 및 WELDLINE등이 없을것.
2. 적용 TERMINAL : ST730642, ST730643
3. 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

GENERAL TOLERANCE (HOUSING)							USED ON
10 MAX	50 MAX	100 MAX	250 MAX	250 VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

NO.	PART NO.	PART NAME	MATERIAL	FINISH
①	MG674024	312II 3F HOUSING	PBT	BLACK
②	MG674025	312II 3F SPACER	PBT	NATURAL

NOTE

1. MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE TERMINAL : ST730642, ST730643
3. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

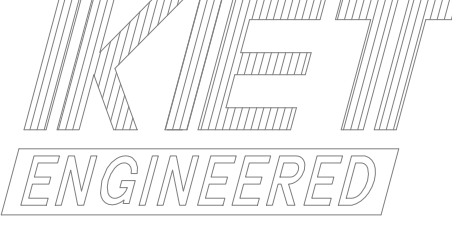					MATERIAL	SEE TABLE	 KOREA ELECTRIC TERMINAL CO., LTD.	
					FINISH	SEE TABLE		
③	ECO-1301-100 근거 제작성	YM.K	CSH	HS	'13.01.14	WIRE RANGE		CLASS
②	ECO-1205-086 근거 제작성	YM.K	CSH	HS	'12.05.15	INSULATION		TYPE
①	ECO-1204-076 근거 제작성	CJH	CSH	HS	'12.04.23	TOLERANCE EXCEPT AS NOTED		PART NO.
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	SCALE	2/1
DR.	KBS	'08.09.10	CHK.	JYS	'08.09.10	SEE TABLE		PART NO. MG653993
CHK.	HS	'08.09.17	APP.	KKJ	'08.09.17	PART NAME		312 II 3F ASSY

ISSUE MARK