
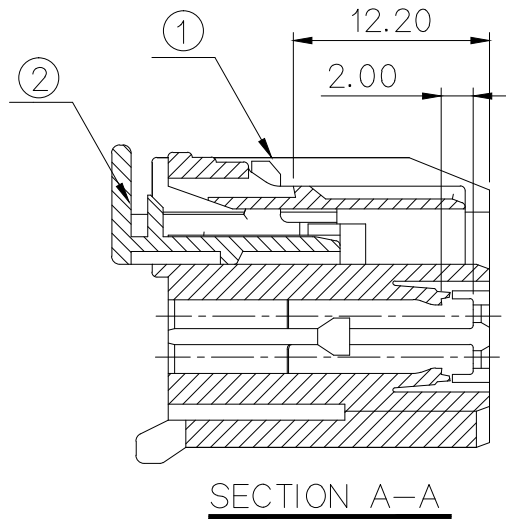
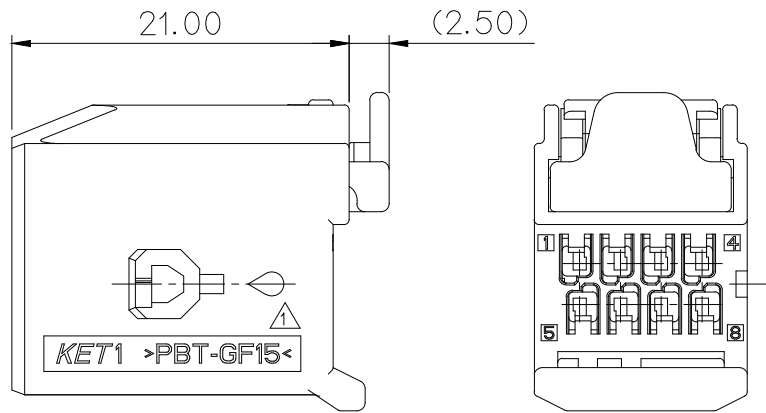
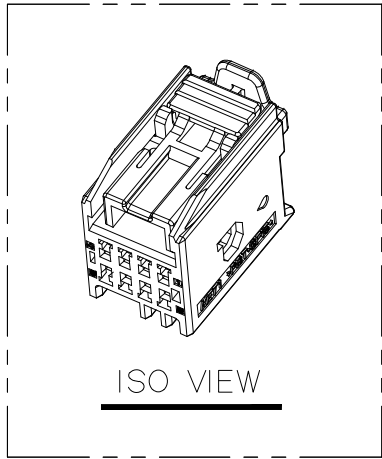
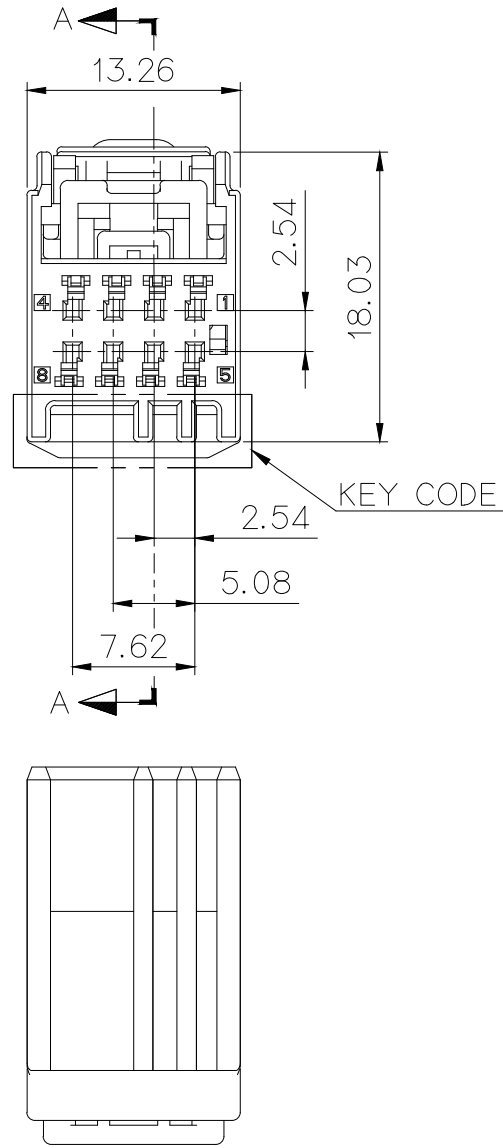


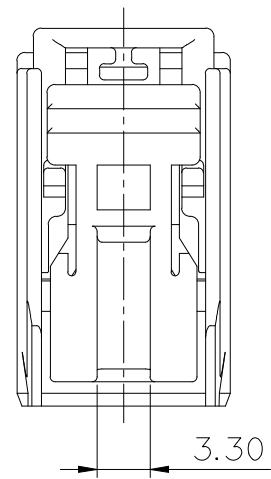

주 기

- 1 기능상 유해한 BURR 및 WELDLINE등이 없을 것.
- 2. 적용 TERMINAL : ST731068-3
TPA : MG635585
MALE ASSY : MG645584
- 3. CPA는 1차 LOCK 상태로 유지, 공급할 것.
- 4. 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NOTE


- 1. MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
- 2. APPLICABLE TERMINAL : ST731068-3
TPA : MG635585
MALE ASSY : MG645584
- 3. CPA IS SUPPORT WITH THE 1st LOCK CONDITIOIN.
- 4. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30’	0.1	

부품정보

PART NAME		PART NO.
064 8F Ass’y (with CPA – B Type)		MG654863-41
064 8F Ass’y (with CPA – A Type)		MG654243-5

②	064 8F CPA	MG674226-2	PBT	BLUE	1 EA	1 EA
①	064 8F Housing – B Type	MG674865-41	PBT+GF15%	LIGHT GRAY	—	1 EA
	064 8F Housing – A Type	MG674245-5		BLACK	1 EA	—
NO.	PART NAME	PART NO.	MATERIAL	COLOR	Q’TY.	

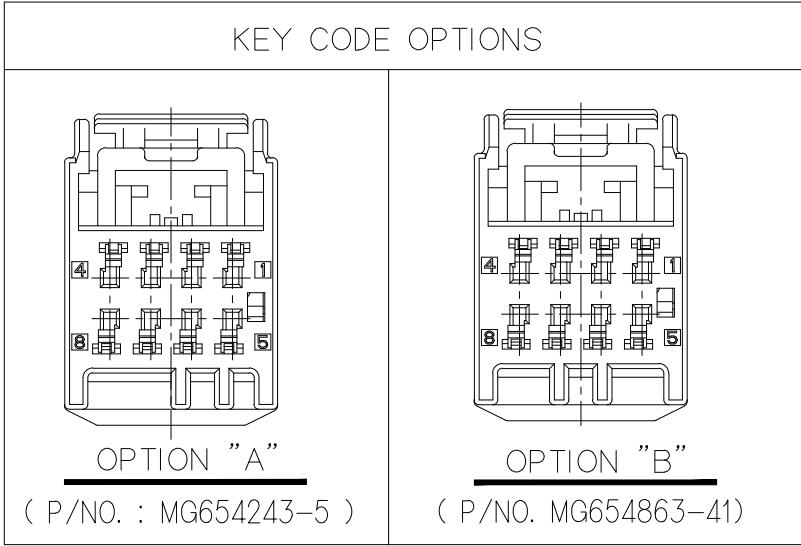




NO.	MATERIAL	COLOR
0	PBT + GF15%	NATURAL
1		RED
2		BLUE
20		JADE
3		YELLOW
4		GRAY
40		DARK GRAY
* 41		LIGHT GRAY
* 5		BLACK
6		DARK GREEN
7		BROWN
8		LIGHT GREEN
9		MAGENTA
11		ORANGE

APPROVED

2016-03-11

KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.

ISSUE MARK

						MATERIAL		SEE TABLE	 KOREA ELECTRIC TERMINAL CO., LTD.			
						FINISH		SEE TABLE				
						WIRE RANGE				CLASS	064	
						INSULATION				TYPE		
	ECO-1507-436 근거 도면 재작성	SSY	CSH	LSY	'15.07.24	TOLERANCE EXCEPT AS NOTED		SEE TABLE	SCALE	2/1	PART NO.	MG654863-41 MG654243-5
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	PART NAME					
DR.		LJH	'11.06.09	CHK.								
CHK.		'11.06.09	APP.			'11.06.09	064 8F Ass'y (with CPA)					