
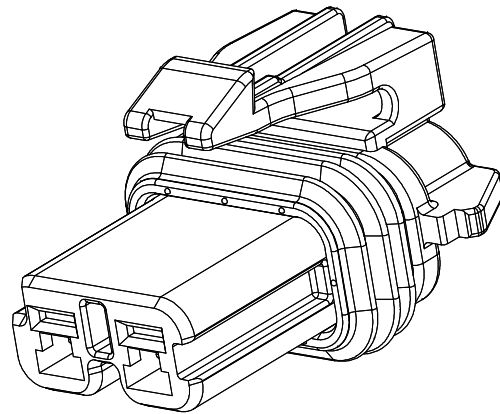
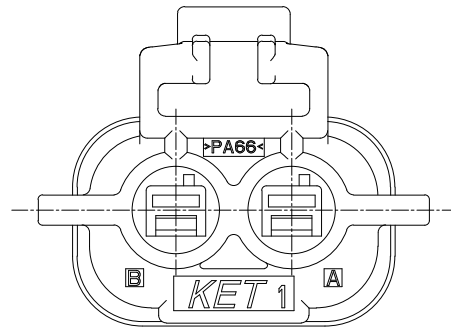
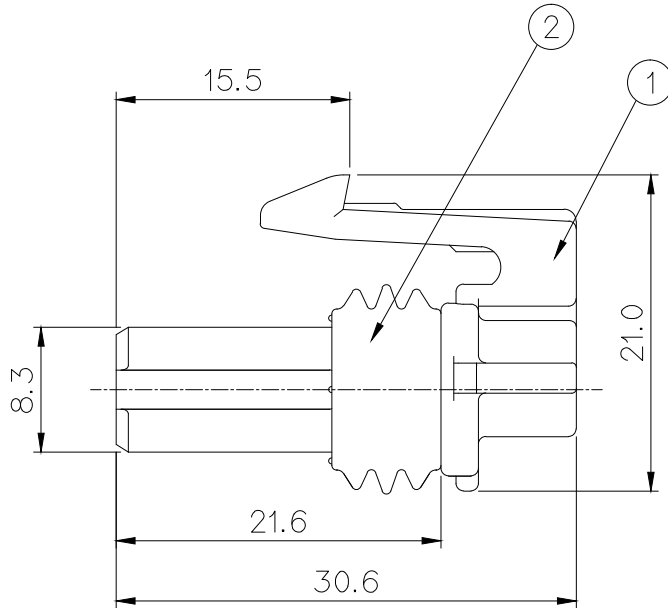


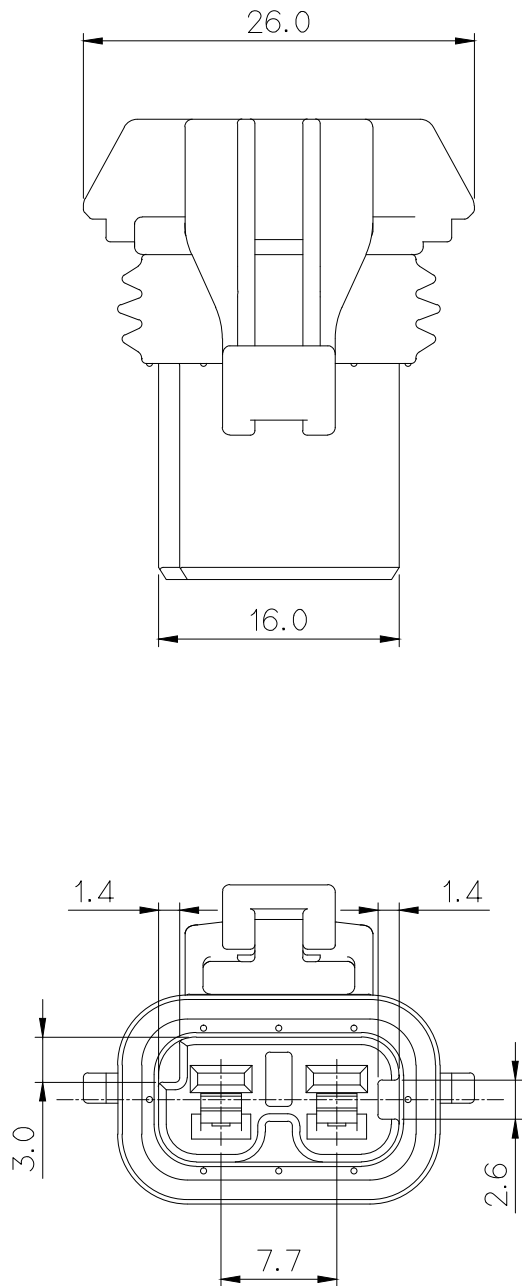

ISO - VIEW
(S= 2/1)

GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

NOTE

1. UNLESS OTHERWISE SPECIFIED ALL RADIUS TO BE 0.3 RADIUS.
2. MUST BE FREE OF FLASH AND IMPERFECTION THAT AFFECT FUNCTION.
3. APPLICABLE FEMALE TERMINAL : DELPHI GT 15304718 ~ 20 △
APPLICABLE CPA : MG634604-1
APPLICABLE REAR HOLDER : MG634605-2

NO.	PART NAME	U/S	MATERIAL	COLOR	REMARK
①	280 2F HOUSING	1	PA66	BLACK	
②	280 2F INNER SEAL	1	SILICONE	GREEN	



					MATERIAL	SEE TABLE	 KOREA ELECTRIC TERMINAL CO., LTD.	
					FINISH	SEE TABLE		
					WIRE RANGE			CLASS 280
					INSULATION			TYPE 
	ECO-1208-642 근거 도면 재 작성 (적용 TML 품번 오기 정정)	LJH	UYH	HSH	21.AUG.'12			
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE 2/1	PART NO. MG654446
DR.	CJH '11.12.12	CHK. 						
CHK.	HEM '11.12.12	APP. HSH '11.12.12			PART NAME 280 WP 2F CONNECTOR ASSY			