



NO.	MATERIAL	COLOR
0	PA66	NATURAL
1		RED
2		BLUE
20		JADE
3		YELLOW
4		GRAY
40		DARK GRAY
41		LIGHT GRAY
* 5		BLACK
6		DARK GREEN
7		BROWN
8		LIGHT GREEN
9		MAGENTA
11		ORANGE

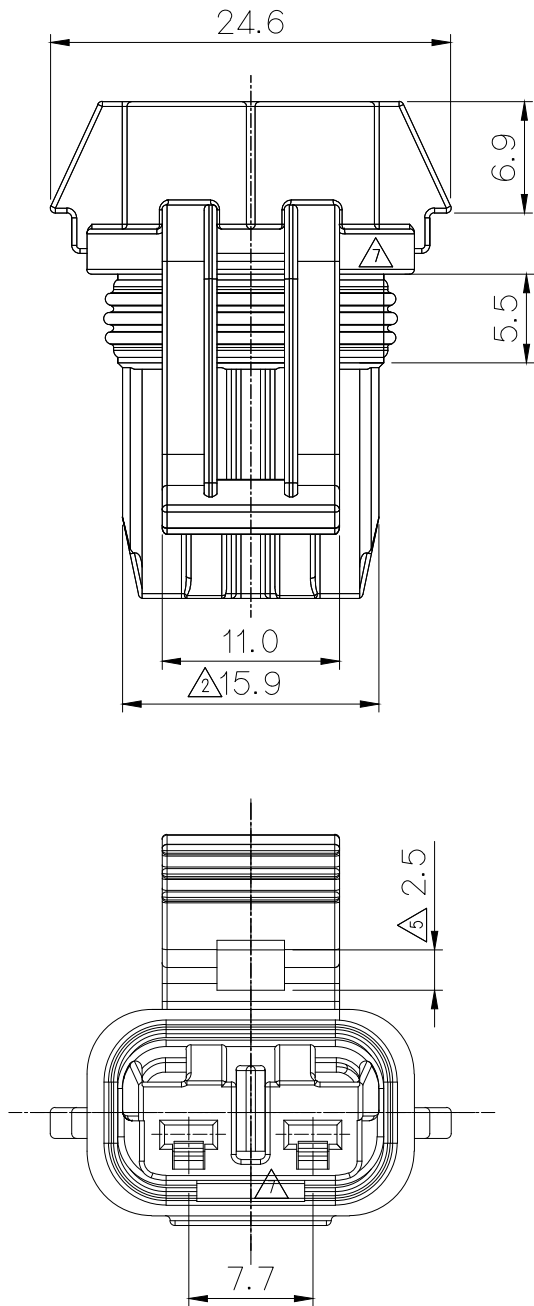

NO.	PART NAME	PART NO	MATERIAL	FINISH	QTY
1	280 WP 2F HOUSING	MG674470	SEE TABLE	SEE TABLE	1
2	280 WP 2F INNER SEAL	R602209	SILICONE	GREEN	1

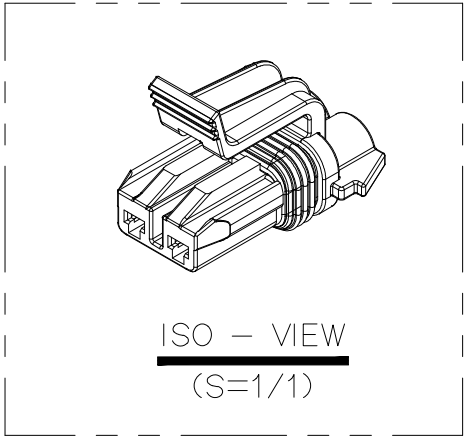

NOTE

- UNLESS OTHERWISE SPECIFIED ALL RADIUS TO BE 0.3 RADIUS.
- MUST BE FREE OF FLASH AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE FEMALE TERMINAL : ST731152-3, ST731153-3, ST731282-3
APPLICABLE REAR HOLDER : MG634471
- APPLICABLE WIRE SEAL : MG680564, MG680470, MG680470, MG685227
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD MERCURY,CADMIUM, HEXAVALENT CHROMIUM,PPBs,PPDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

주 기

- 지시하지 않은 반경 R은 0.3로 한다
- 기능상 유해한 FLASH 또는 변형이 없을 것.
- 적용 FEMALE TERMINAL : ST731152-3, ST731153-3, ST731282-3
적용 REAR HOLDER : MG634471
- 적용 WIRE SEAL : MG680564, MG680470, MG685484, MG685227
- 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬,PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

ECO-2001-254 근거 도면 제작성	KJH	HYJ	CJH	'20.01.21
ECO-1504-295 근거 도면 제작성	LJW	HYJ	LSY	'15.04.16
ECO-1310-035 근거 도면 제작성	KJH	CSH	CWK	07.OCT.'13
LTR	DR.	CHK.	APP.	DATE

ECO-1203-003에 의한 수정	LTG	HEM	SHS	02.MAR.'12
ECO-1201-004에 의한 수정	LTG	HEM	SHS	05.JAN.'12
ECO-1110-0430에 의한 수정	LKM	CYJ	SHS	11.OCT.'11
ECO-1109-107에 의한 수정	LKM	CYJ	SHS	07.SEP.'11
설계사양변경서(S110030)에의한 수정	LKM	HEM	SHS	26.JAN.'11
LTR	DR.	CHK.	APP.	DATE
DR.	LKM.	2009.09.05	CHK.	
CHK.	LDG	09/05	APP.	BJS 09/05

MATERIAL	SEE TABLE	KETA KOREA ELECTRIC TERMINAL CO., LTD.
FINISH	SEE TABLE	
WIRE RANGE		CLASS 280
INSULATION		TYPE WP
TOLERANCE EXCEPT AS NOTED	SCALE 2/1	PART NO. MG654469
PART NAME	280 WP 2F ASSY	

APPROVED

2021-01-07

KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.

ISSUE MARK