
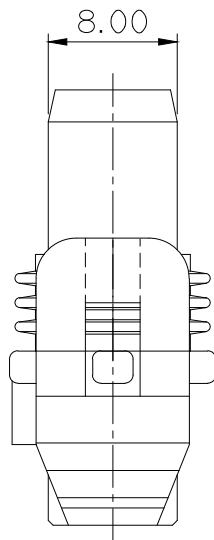
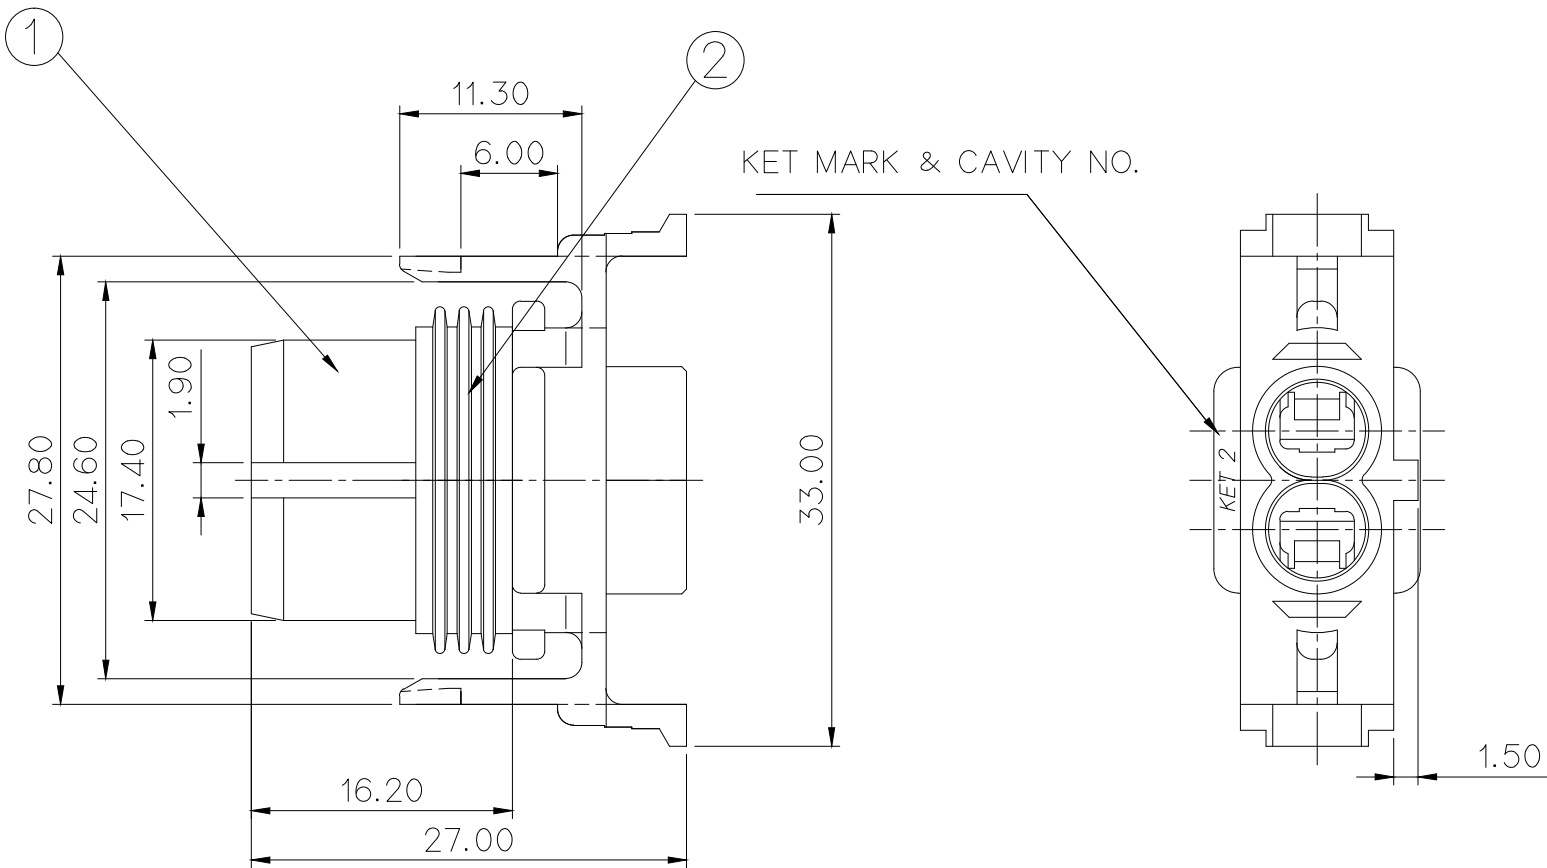
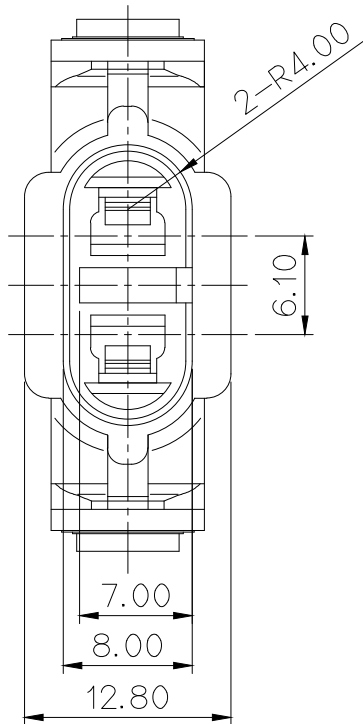


GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

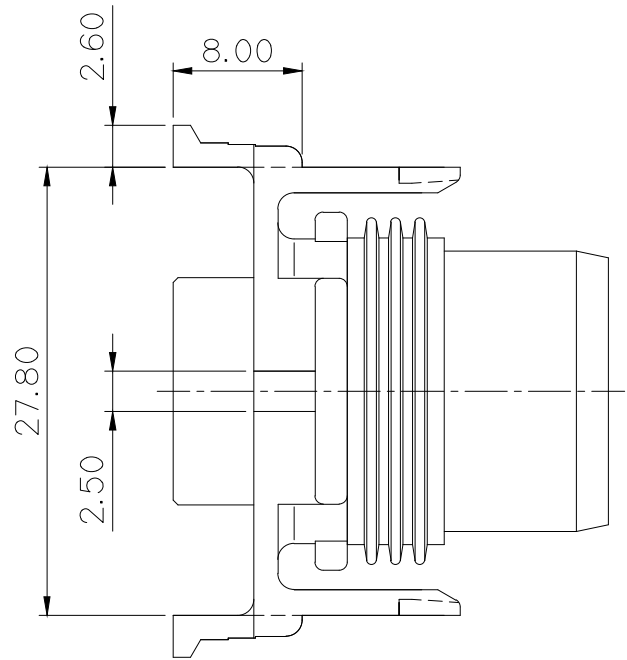

주 기

- 1.기능상 유해한 BURR 및 WELDLINE등이 없을것.
- 2.적용 TERMINAL: ST730525-3
적용 R/HOLDER : MG632506/633603
WIRE SEAL : MG680564
3. 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NOTE

1. MUST BE FREE OF FLASH, SINK
AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE TERMINAL :ST730525-3
APPLICABLE OF R/HOLDER : MG632506/633603
WIRE SEAL : MG680564
3. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.


NO.	PART NO.	PART NAME	MATERIAL	FINISH
1	MG672521	FOG LAMP 2P PLUG HS'G	PBT	BLACK
2	R600100-1	FOG LAMP 2P I/SEAL	SILICONE	RED

APPROVED

2016-03-11

KOREA ELECTRIC
TERMINAL CO., LTD.
Connector Develop
ment Team 1

ISSUE MARK

						MATERIAL	SEE THE TABLE	 KOREA ELECTRIC TERMINAL CO., LTD.	
						FINISH	SEE THE TABLE		
						WIRE RANGE	CLASS		
						INSULATION	TYPE		
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE 2/1	PART NO. MG654491
DR.	HKS, '08.08.19		CHK.			PART NAME FOG LAMP 2P PLUG HOUSING ASS'Y			
CHK.	HSH, '08.08.19		APP. KKJ, '08.08.19						