


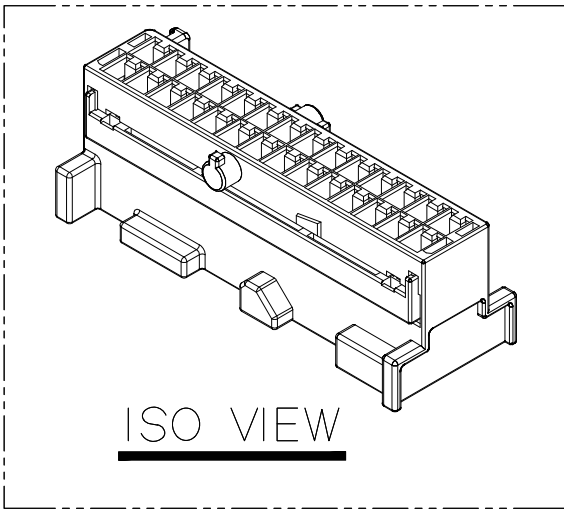
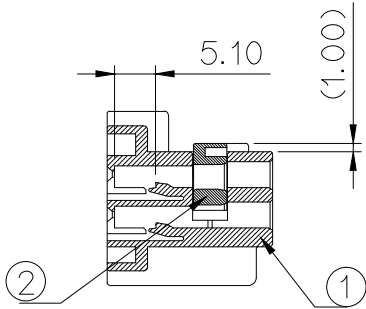
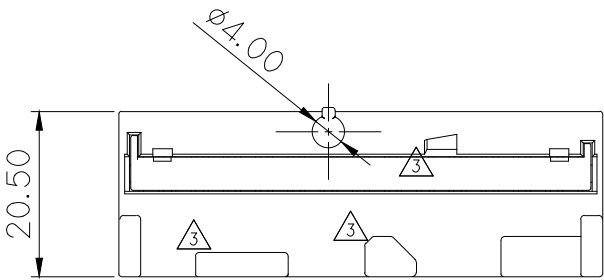


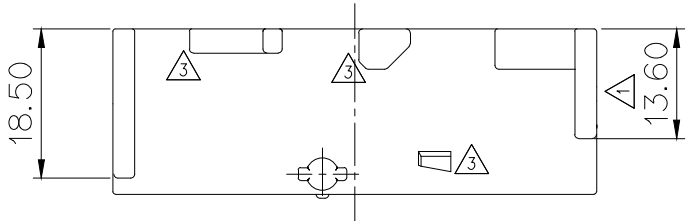

NO.	PART NO.	PART NAME	MATERIAL	FINISH
①	MG674643	090 II 28F HOUSING	PBT	NATURAL
②	MG674644	090 II 28F SPACER		L/GRAY



SECTION A-A
(090)

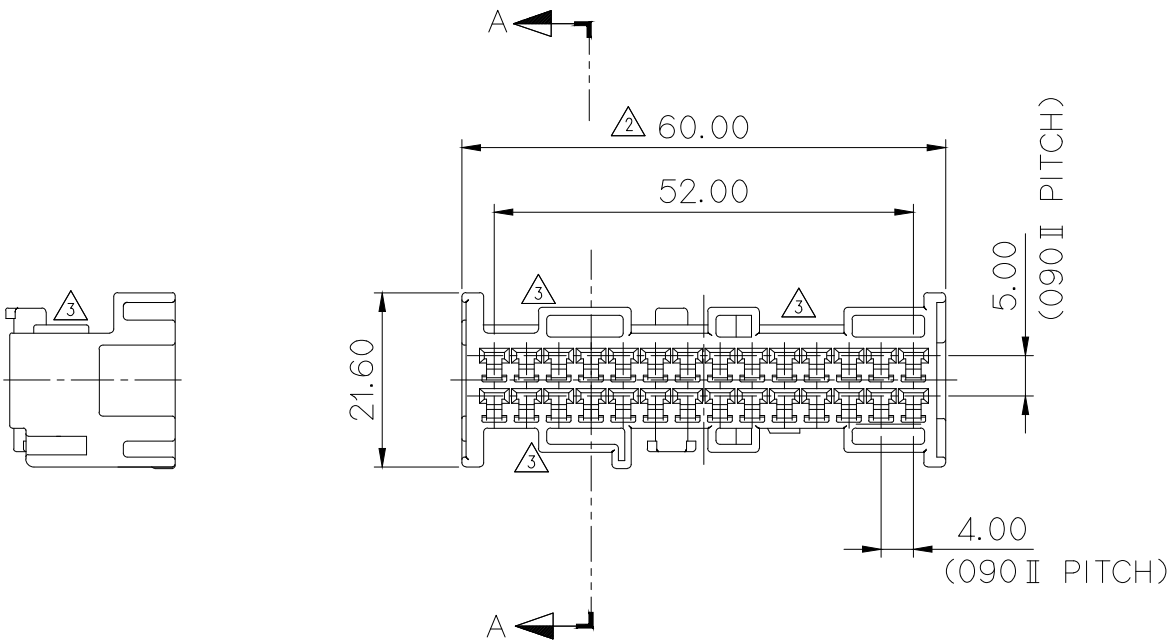

GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

NOTE

- UNLESS OTHERWISE SPECIFIED ALL RADIUS TO BE 0.5 RADIUS.
- MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE TERMINAL(090DTC) : ST731108, 1046, 1047-3) ST730677-3
- APPLICABLE LEVER : MG634645
- KET MARK : TAPER 15° (H; 0.1~0.2, SIZE; 1.5) CAVITY NO. : TAPER 0°(H; 0.1~0.2, SIZE; 1.5)
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

주 기

- 지시하지 않은 반경 R은 0.5로 한다
- 기능상 유해한 BURR 및 WELDLINE등이 없을것.
- 적용 TERMINAL(090DTC) : ST731108, 1046, 1047-3) ST730677-3
- 적용 LEVER : MG634645
- KET 문자 : 기울기 15°(H; 0.1~0.2, SIZE; 1.5) CAVITY NO.: 기울기 0°(H; 0.1~0.2, SIZE; 1.5)
- 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

APPROVED

2018-12-07

KOREA ELECTRIC
TERMINAL CO., LTD.
Product Developme
nt Team 1

ISSUE MARK

					MATERIAL SEE TABLE		 KOREA ELECTRIC TERMINAL CO., LTD.	
					FINISH SEE TABLE			
③	설계사양변경(S100061)(S100062) 근거 재작성	YSW			'10.03.23	WIRE RANGE		CLASS
②	설계사양변경(S090343) 근거 재작성	KHS	---	---	'09.11.27	INSULATION		TYPE 090 II
①	설계사양변경(S090310) 근거 재작성	KHS	---	---	'09.10.27	TOLERANCE EXCEPT AS NOTED SEE TABLE		SCALE 1/1
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	PART NO.		MG654642
DR. KDJ '09.05.06		CHK.				PART NAME		
CHK. ---		APP. ---		5/11		090 II 28F HOUSING ASSY		