

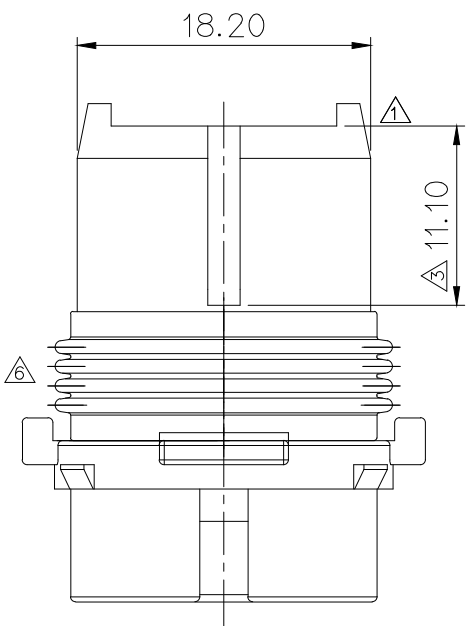
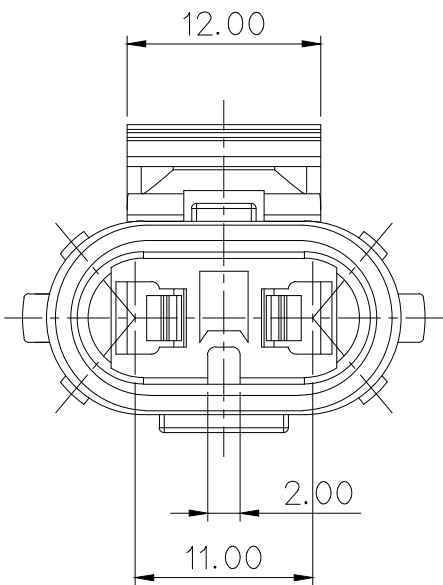


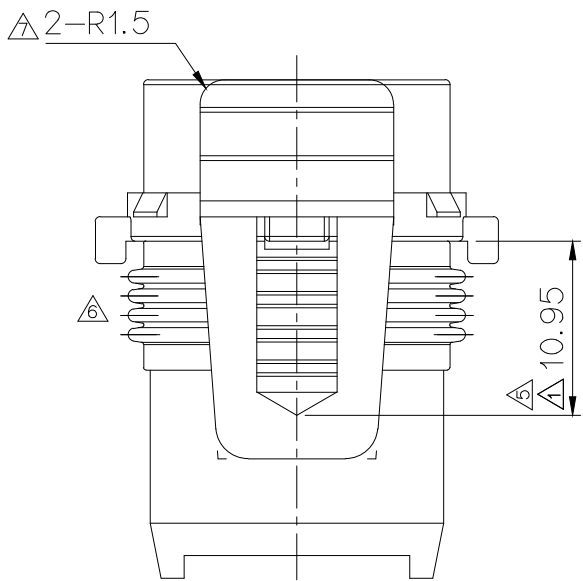

GENERAL TOLERANCE (SILICONE RUBBER)						GENERAL TOLERANCE (HOUSING)							USED ON
0 TO 6	6 TO 10	10 TO 18	18 TO 30	30 TO 50	50 TO 80	10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.4	±0.5	±0.6	±0.8	±1.0	±1.2	±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

△ASS'Y P/N	NO	PART NO	PART NAME	MATERIAL	FINISH
MG653426	1	MG673425	FOG LAMP WP 2F HOUSING (9006)	PBT	DARK GRAY
	2	R602071	FOG LAMP WP 2F HS'G INNER SEAL	SILICONE	ORANGE
MG654844-41	1	MG674845	FOG LAMP WP 2F HOUSING (9005)	PBT	GRAY
	2	R602071	FOG LAMP WP 2F HS'G INNER SEAL	SILICONE	ORANGE
MG654844-5	1	MG674845	FOG LAMP WP 2F HOUSING (9005)	PBT	BLACK
	2	R602071	FOG LAMP WP 2F HS'G INNER SEAL	SILICONE	ORANGE
MG656836-5	1	MG674845	FOG LAMP WP 2F HOUSING (9005)	PBT	BLACK
	2	R600100	FOG LAMP WP 2F HS'G INNER SEAL	SILICONE	BLUE

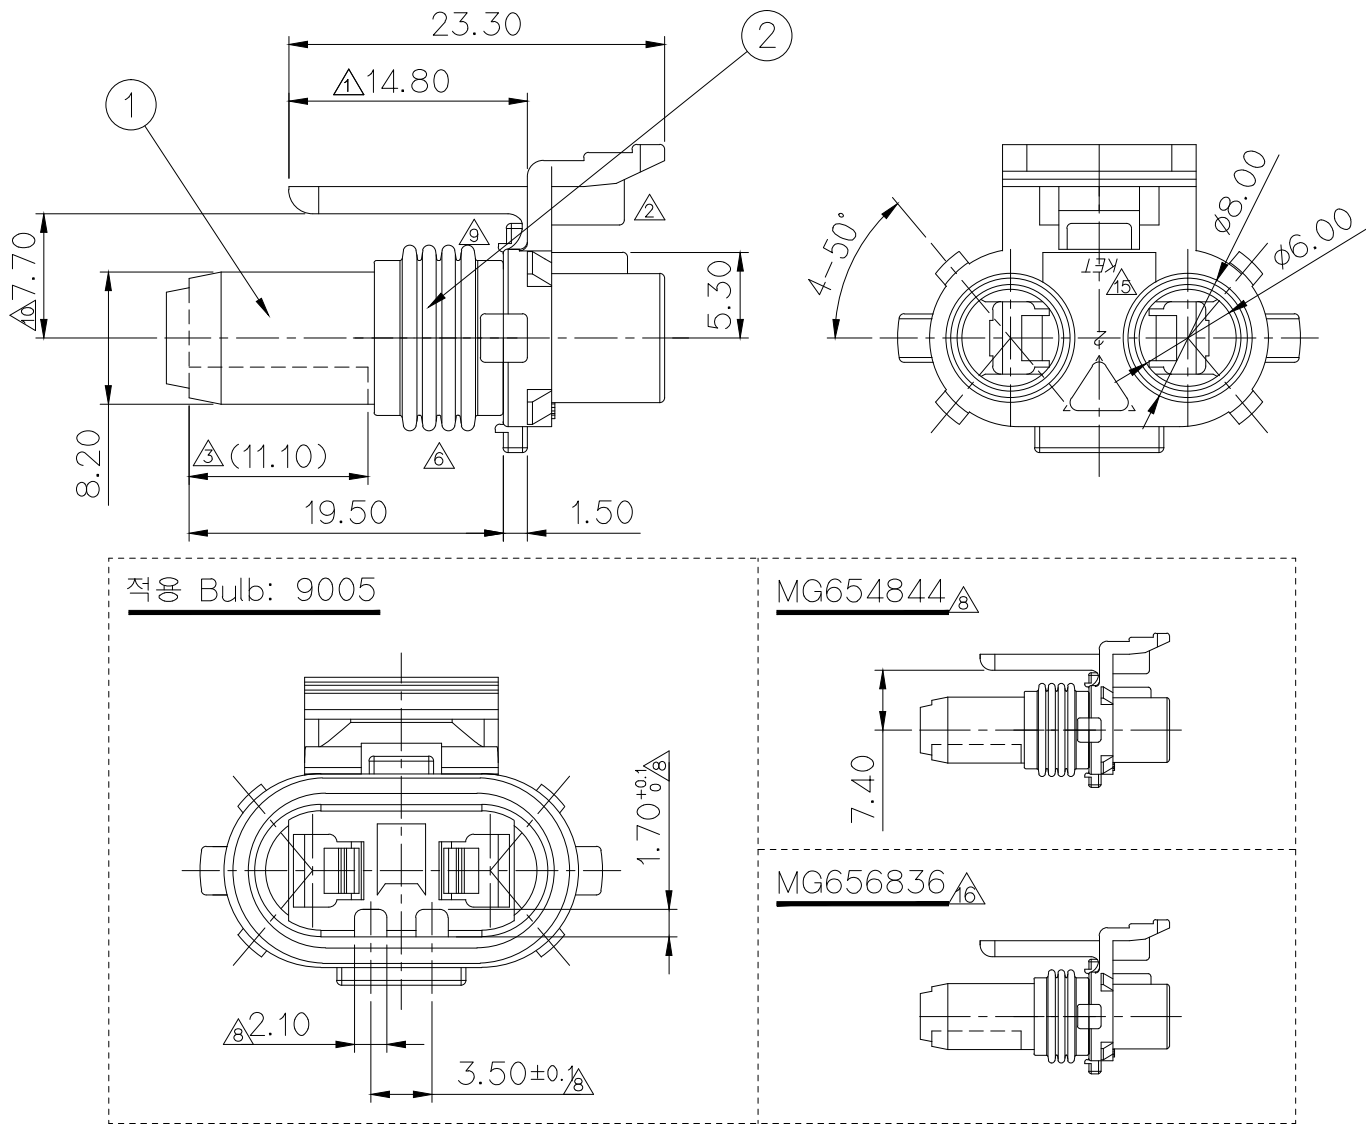

NOTE

1. UNLESS OTHERWISE SPECIFIED ALL RADII & CHAMFER TO BE 0.3 RADIUS(CHAMFER).
2. MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
3. FLASH ARE NOT ALLOWED ON CONTACT MOLDED PART OF SEAL GASKET.
4. APPLICABLE OF TERMINAL : ST730524-3 /525-3
5. APPLICABLE OF R/HOLDER : MG633542
6. WATERPROOF FUNCTION MUST BE SATISFIED ON ES-91500-00
7. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

주 기

1. 지시하지 않은 반경(모따기) R(C)은 0.3으로 한다.
2. 기능상 유해한 BURR 및 WELDLINE등이 없을 것.
3. SEAL GASKET 접촉 및 RIB PARTING면에 BURR등이 없을 것.
4. 적용 TERMINAL : ST730524-3 /525-3
5. 적용 REAR HOLDER : MG633542
6. 방수 기능은 ES-91500-00에 준할 것.
- 7.제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

APPROVED

2016-03-07

KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.

ISSUE MARK

△ECO-1509-347	근거 도면 재작성	NKT	BIN	'15.09.23
△ECO-1405-134	근거 도면 재작성	LHJ	BIN	'14.05.21
LTR	REVISION RECORD	DR.	CHK.	APP.

△ECO-1303-163	근거 도면 재작성			13.04.10
△ECO-1303-090	근거 도면 재작성	KDR		13.03.13
△ECO-1302-190	근거 도면 재작성	KDR		13.02.28
△ECO-1111-009	근거 도면 재작성	AJH		11.11.01
△상대물 체결시 Lock부 들림에 의한 파손 개선		HYJ		11.08.12
△설계사양변경(S110088)	근거 도면 재작성	SJK		11.04.08
△설계사양변경(S100273)	근거 도면 재작성	LHS		'10.10.28
△설계사양변경(O60312)	근거 도면 재작성	CJH		'06.12.06
LTR	REVISION RECORD	DR.	CHK.	APP.

△설계사양변경(O60148)	근거	CYJ	HSW	KKJ	'06.05.29
△설계사양변경(O60108)	근거	HKS	HSW	KKJ	'06.04.10
△설계사양변경(O60042)	근거	CYJ	HSW	KKJ	'06.02.01
△설계사양변경(O50201)	근거	CYJ	HSW	KKJ	'05.11.28
△설계사양변경(O50156)	근거	HKS	HSW	KKJ	'05.07.12
△설계사양변경(O50113)	근거	SNH	HSW	KKJ	'05.05.16
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE
DR.	BIN, '04.12.18	CHK.	KO,	'04.12.18	
CHK.		APP.		12/18	

MATERIAL	SEE TABLE	KETA ENGINEERED	KOREA ELECTRIC TERMINAL CO., LTD.
FINISH	SEE TABLE		
WIRE RANGE		CLASS	110 WP
INSULATION		TYPE	DELPHI 1205-9181
TOLERANCE EXCEPT AS NOTED	SEE TABLE	SCALE	2/1
PART NAME	FOG LAMP WP 2F ASSY (9006/△9005 BULB용)		