

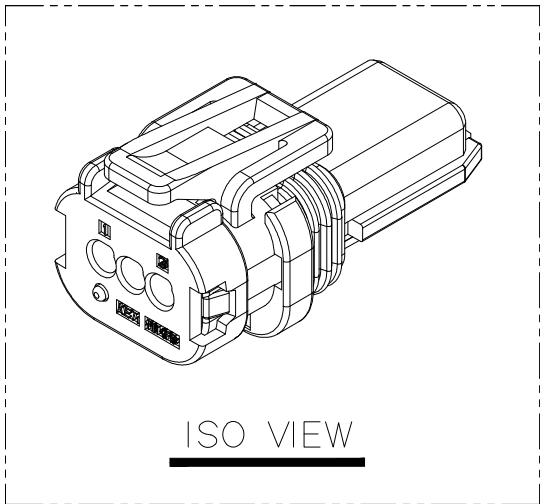
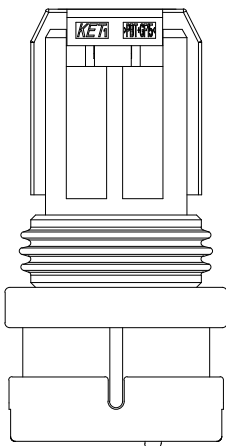
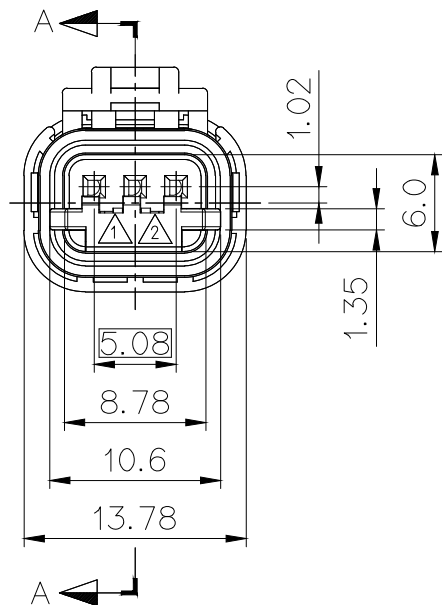



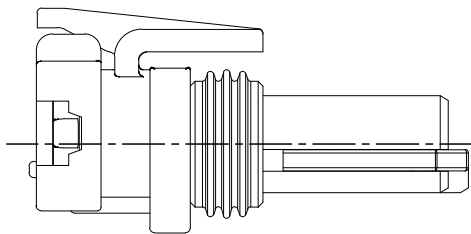


ISO VIEW

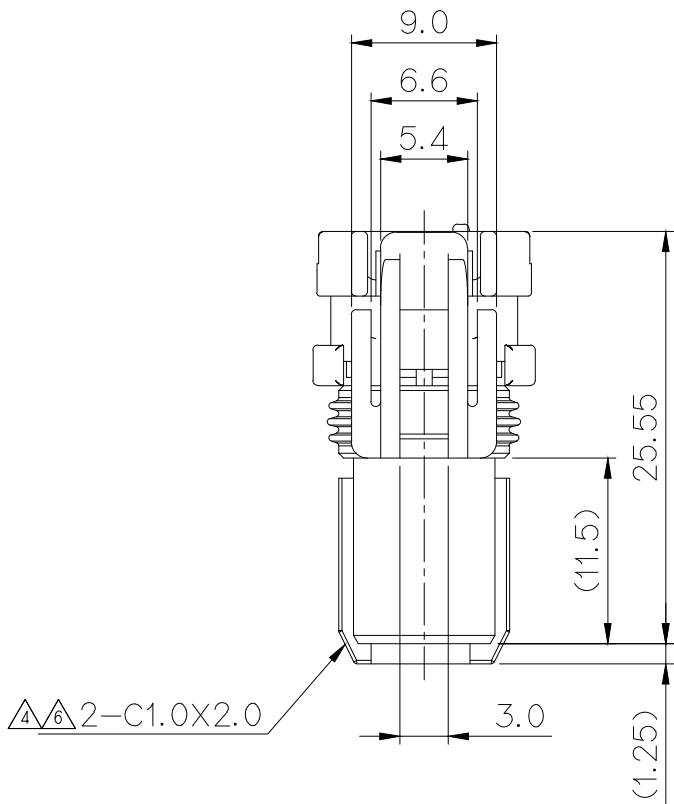

GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

NO.	PART NAME	PART NO.	MATERIAL	COLOR	QTY.	REMARKS
①	025 WP 3F HOUSING	MG674884	PA66	BLACK	1	
②	025 WP 3F TPA	MG674885	PBT+GF15	NATURAL	1	
③	025 WP 3F R/H	MG674886	PBT+GF15	BLACK	1	
④	025 WP 3F Inner Seal	R602265	SILICONE	RED	1	
⑤	025 WP 3F Block Seal	R602266	SILICONE	RED	1	

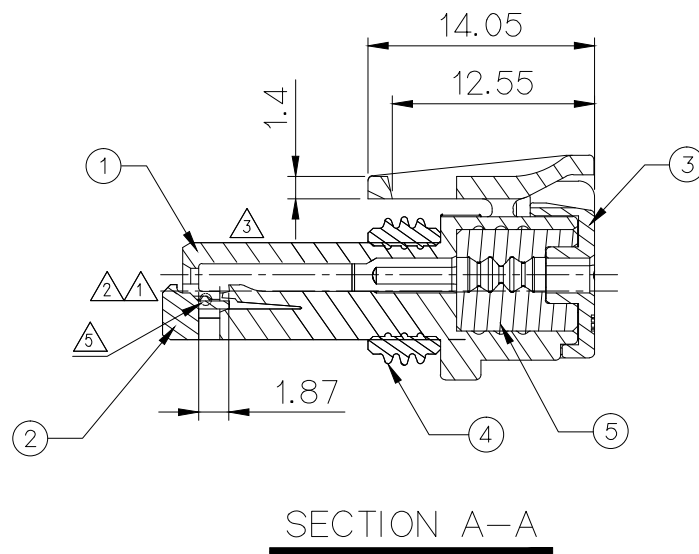

주 기

- 기능상 유해한 BURR 및 WELDLINE 등이 없을 것.
- 적용 TERMINAL : ST731068
- 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NOTE

- MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE TERMINAL : ST731068
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

APPROVED

2018-12-11

KOREA ELECTRIC
TERMINAL CO., LTD.
Connector Develop
ment Team 1

ISSUE MARK

KET KOREA ELECTRIC
ENGINEERED TERMINAL CO., LTD.

CLASS 025

TYPE

PART NO. MG654883

025 WP 3F ASSY

⑥	ECO-1503-536 근거 도면 변경	KCS	HYJ	LSY	'15.03.26
⑤	ECO-1501-291에 근거 도면 변경 (Rework후 TPA 재검시 1.5단 조립 개선)	KTH	HYJ	LSY	'15.01.22
④	ECO-1406-124에 근거 도면 재작성	KJY	HYJ	HJB	'14.06.19
③	ECO-1211-031에 근거 도면 재작성	YM.K	CSH	HSB	'12.11.08
②	ECO-1209-167에 근거 도면 재작성	YM.K	CSH	HSB	'12.09.18
①	ECO-1209-020에 근거 도면 재작성	YM.K	CSH	HSB	'12.09.04
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE
DR.	BJG. 26.AUG.2010	CHK.			
CHK.		APP.			

MATERIAL	SEE TABLE
FINISH	SEE TABLE
WIRE RANGE	
INSULATION	
TOLERANCE EXCEPT AS NOTED	SEE TABLE
SCALE	2/1

PART NAME 025 WP 3F ASSY