

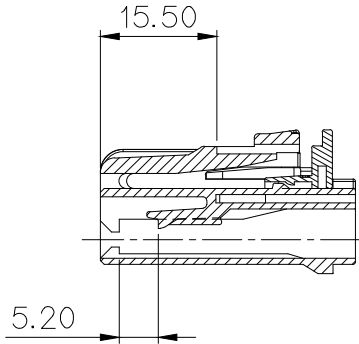
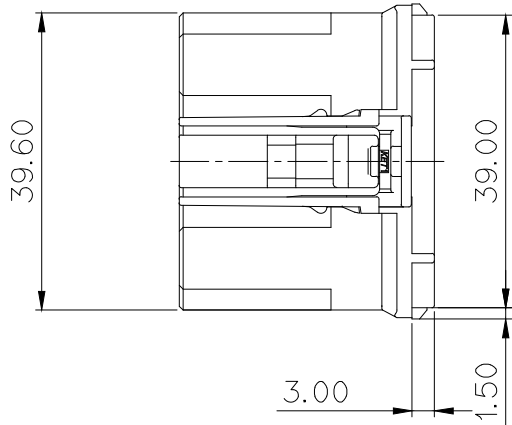


ISO VIEW

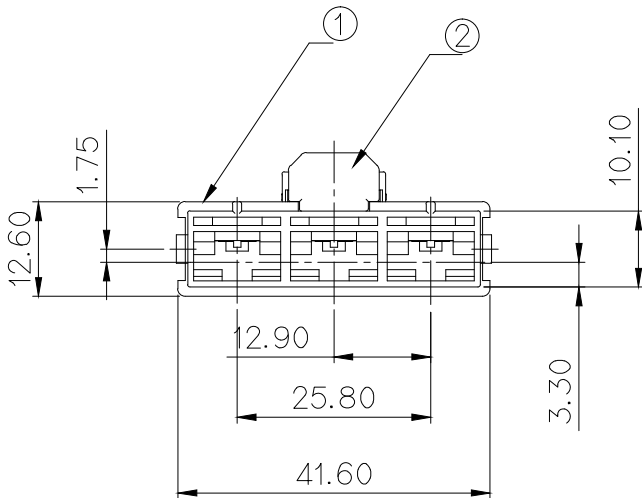

SECTION A-A

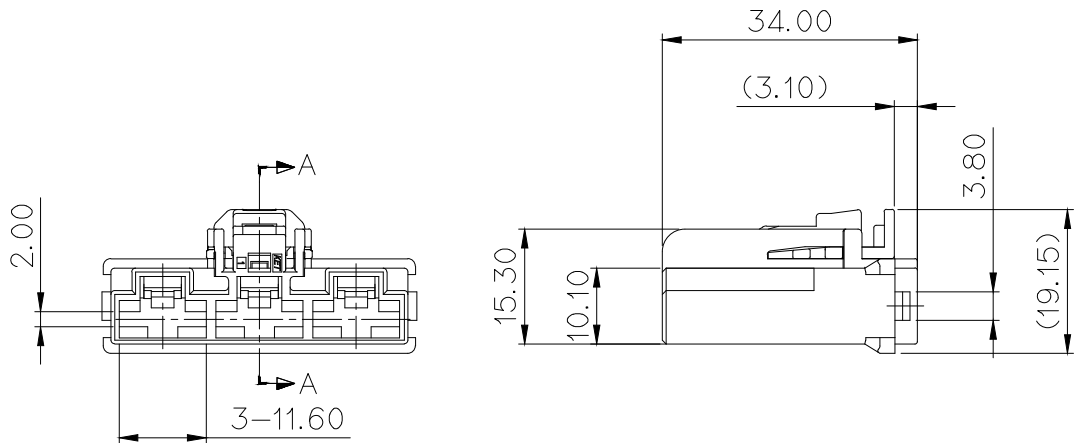

GENERAL TOLERANCE (HOUSING)

10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	USED ON
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

주 기

- 1 기능상 유해한 BURR 및 WELDLINE등이 없을 것.
- 2.적용 REAR HOLDER : MG635606
적용 MALE HOUSING : MG645698
적용 TERMINAL : ST730722, ST730723
3. CPA는 1차 LOCK 상태로 유지, 공급할 것.
4. CONNECTOR 삽발력 : 12 Kgf 이하
5. 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NOTE

1. MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE REAR HOLDER : MG635606
APPLICABLE MALE HOUSING : MG645698
APPLICABLE TERMINAL : ST730722, ST730723
3. CPA IS SUPPORT WITH THE 1st LOCK CONDITIOIN.
4. CONNECTOR INSERTION/EXTRACTION FORCE : 12 Kgf Max.
5. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

ISSUE MARK

부품정보

NO	PART NAME	PART NO	MATERIAL	FINISH	Q'TY
①	375 3F HOUSING	MG675729	PBT	BLACK	1 EA
②	375 2F CPA	MG675730	PBT+GF10%	YELLOW	1 EA

					MATERIAL	SEE TABLE		
					FINISH	SEE TABLE		
					WIRE RANGE		CLASS	375
					INSULATION		TYPE	
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE	PART NO.
						SEE TABLE	1/1	MG655656
DR.	HSR 2013.07.08	CHK.				PART NAME		
CHK.	HEM 2013.07.08	APP.	CWK 2013.07.08					375 3F ASS'Y (WITH CPA)

KET KOREA ELECTRIC
ENGINEERED TERMINAL CO., LTD.