

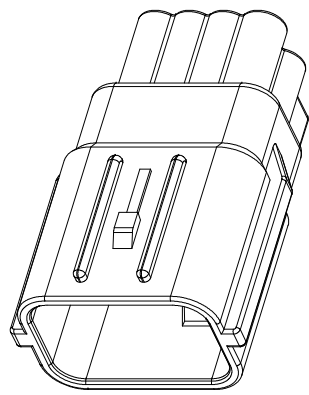
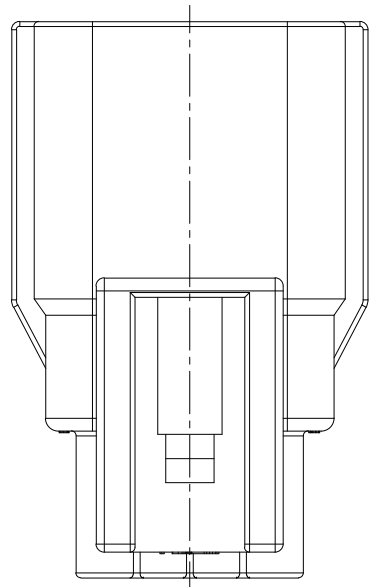
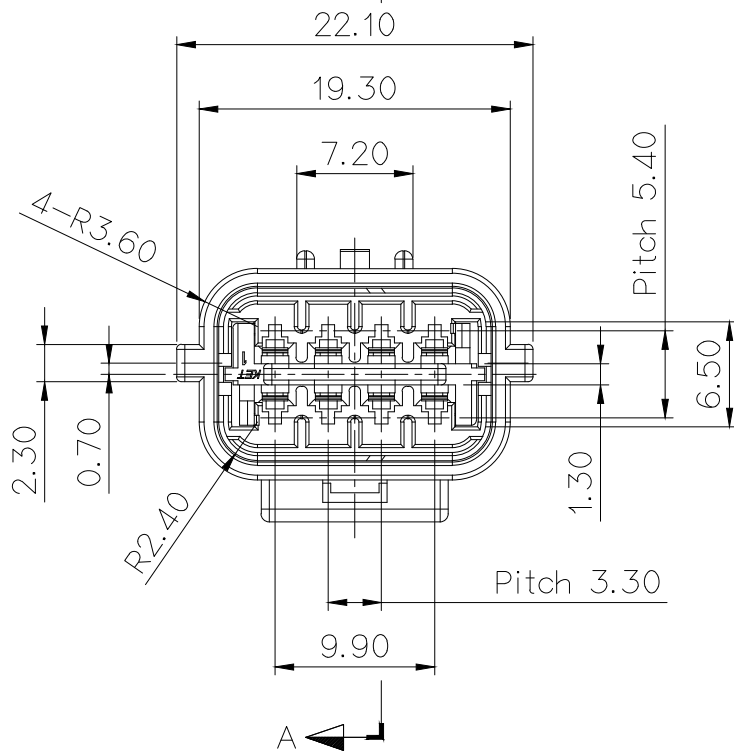
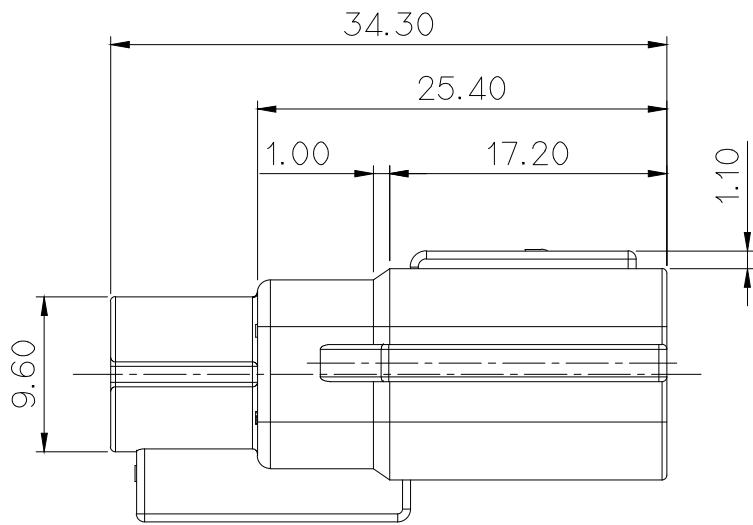




ISO VIEW

NO.	MATERIAL	COLOR
* 0	P B T	NATURAL
* 1		RED
* 2		BLUE
20		JADE
* 3		YELLOW
4		GRAY
40		DARK GRAY
41		LIGHT GRAY
* 5		BLACK
* 6		DARK GREEN
7		BROWN
8		LIGHT GREEN
9		MAGENTA
11		ORANGE


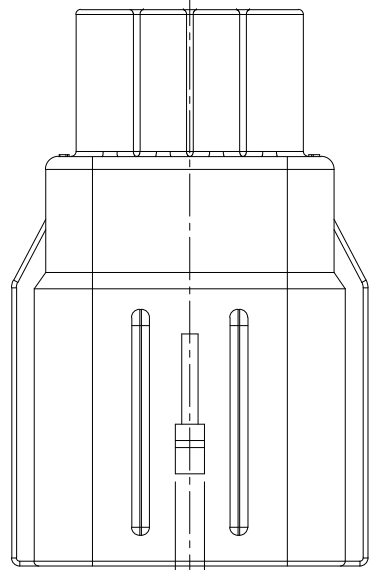


NOTE

- UNLESS OTHERWISE SPECIFIED ALL RADIUS TO BE 0.3 RADIUS.
- UNLESS OTHERWISE SPECIFIED ALL CHAMFERS TO BE 0.3 CHAMFER.
- APPLICABLE TERMINAL : ST741337, 1338
APPLICABLE WIRE SEAL : MG685387, 5388
APPLICABLE DUMMY SEAL : MG685416
APPLICABLE CLIP : MG630418, 0559, 1467, 0922, 3061, 3713, 4647
APPLICABLE FEMALE ASSY : MG645723
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MECURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE.

GENERAL TOLERANCE (HOUSING)										USED ON
10MAX	30MAX	50MAX	70MAX	100MAX	125MAX	250MAX	250VR	ANGLE	ECCENT	
±0.15	±0.2	±0.3	±0.4	±0.5	±0.75	±0.9	±1.4	±30'	0.1	

NO.	PART NO.	PART NAME	MATERIAL	FINISH
1	MG675777	025 WP 8M HOUSING	PBT	SEE TABLE
2	MG675778	025 WP 8M FRONT HOLDER	PBT	NATURAL

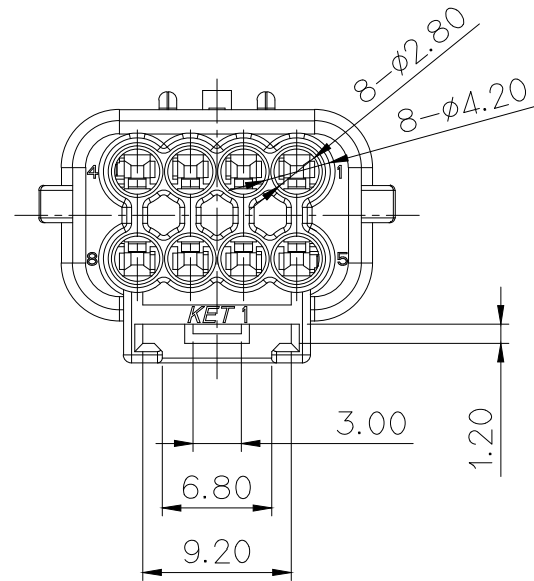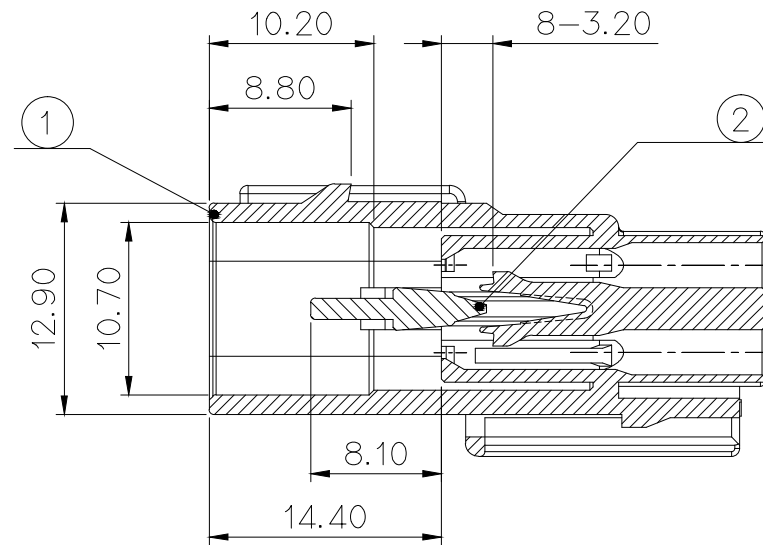

주 기

- 지시하지 않은 반경 R은 0.3으로 한다.
- 지시하지 않은 모따기 C는 0.3으로 한다.
- 적용 TERMINAL : ST741337, 1338
WIRE SEAL : MG685387, 5388
DUMMY SEAL : MG685416
CLIP : MG630418, 0559, 1467, 0922, 3061, 3713, 4647
FEMALE ASSY : MG645723
- 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가 크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

							MATERIAL		SEE TABLE	 KOREA ELECTRIC ENGINEERED TERMINAL CO., LTD.	
							FINISH		SEE TABLE		
							WIRE RANGE			CLASS	025 WP
							INSULATION			TYPE	
	검사 성적서 합격에 따른 도면 재작성		JCM	WDH	KMH	LSY	14.09.04				
LTR	REVISION RECORD		DR.	CHK.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SEE TABLE	SCALE 2/1	PART NO. MG655670
DR.	HYJ	2012.04.12	CHK.	HYJ		2012.04.12	PART NAME 025 WP 8M ASSY				
CHK.	CWK	2012.04.12	APP.	HSH		2012.04.12					

APPROVED

2018-12-11

KOREA ELECTRIC
TERMINAL CO., LTD.
Connector Develop
ment Team 1

SEE TABLE

DIE NO

ISSUE MARK