
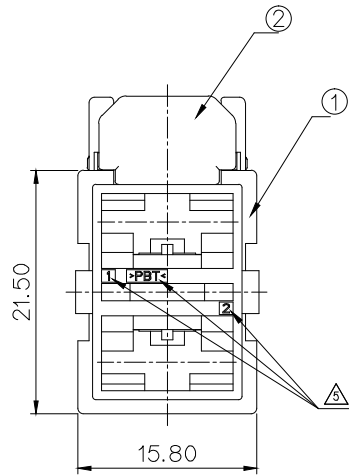
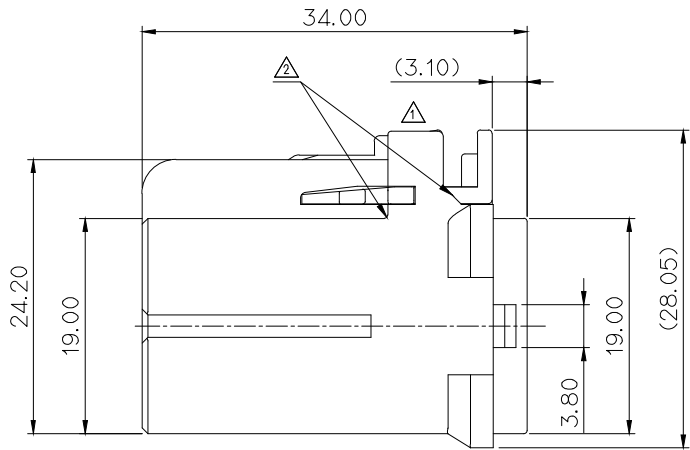
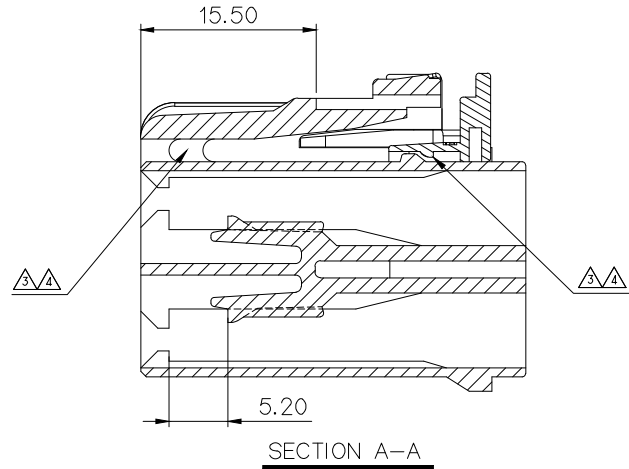
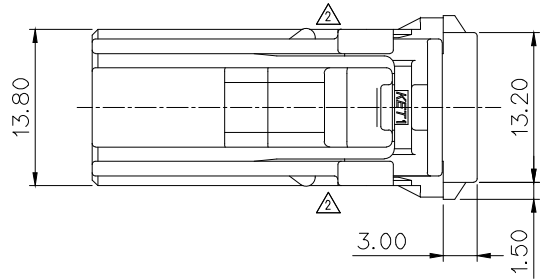


ISO VIEW

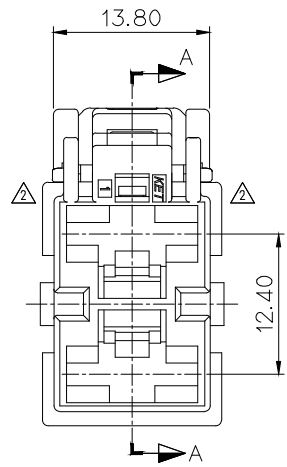


주 기

- 1.기능상 유해한 BURR 및 WELDLINE 등이 없을 것.
- 2.적용 TERMINAL : ST730722, ST730723
적용 MALE HOUSING
- OPTION "A / B " : MG645726
- OPTION "C " : MG645697, MG625429
적용 REAR HOLDER : MG630656
- 3.제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NOTE


1. MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE TERMINAL : ST730722, ST730723
APPLICABLE MALE HOUSING
- OPTION "A / B " : MG645726
- OPTION "C " : MG645697, MG625429
APPLICABLE REAR HOLDER : MG630656
3. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM,PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

KEY CODE OPTIONS




OPTION "A"

(P/NO. : MG655674-7)



OPTION "B"

(P/NO. : MG655675-40)



OPTION "C"

(P/NO. : MG655655-5)

부품정보

NO.	PART NAME	PART NO.	MATERIAL	COLOR
①	375 2F HOUSING - A TYPE	MG675795	PBT	BROWN
	375 2F HOUSING - B TYPE	MG675796	PBT	DARK GRAY
	375 2F HOUSING - C TYPE	MG675728	PBT	BLACK
②	375 2F CPA	MG675730	PBT + GF10%	YELLOW

ECO-1806-036	근거	도면 변경	LND	KSC	CJH	18.07.16	MATERIAL	SEE TABLE	 KOREA ELECTRIC TERMINAL CO., LTD.		
ECO-1801-101	근거	도면 변경	LND	NKT	CJH	18.01.08	FINISH	SEE TABLE			
ECO-1710-179	근거	도면 변경	LND	NKT	CJH	17.10.23	WIRE RANGE			CLASS	375
ECO-1503-258	근거	도면 변경	JY.K	YSW	BIN	15.03.12	INSULATION			TYPE	
ECO-1410-016	근거	도면 변경	KTH	CSH	HJB	14.10.02					
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SEE TABLE	SCALE	PART NO.	MG655674, 75 , 55
DR.	HSR	2013.04.10	CHK.				PART NAME		375 2F ASSY		
CHK.	HEM	2013.04.10	APP.		HSH	2013.04.10					

APPROVED

2018-12-11

KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.

ISSUE MARK

KIET KOREA ELECTRIC
TERMINAL CO., LTD.
ENGINEERED

CLASS 375

TYPE

PART NO. MG655674, 75 , 55