
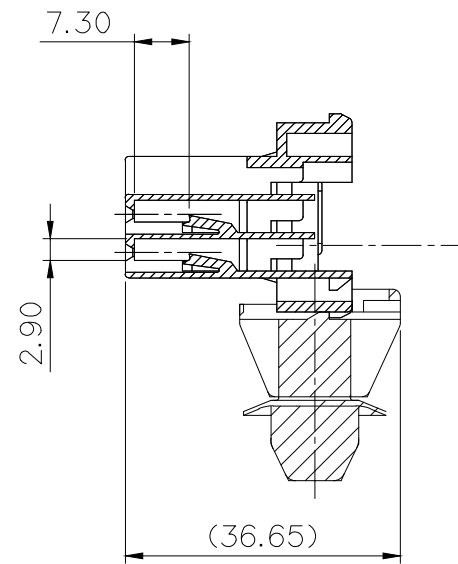
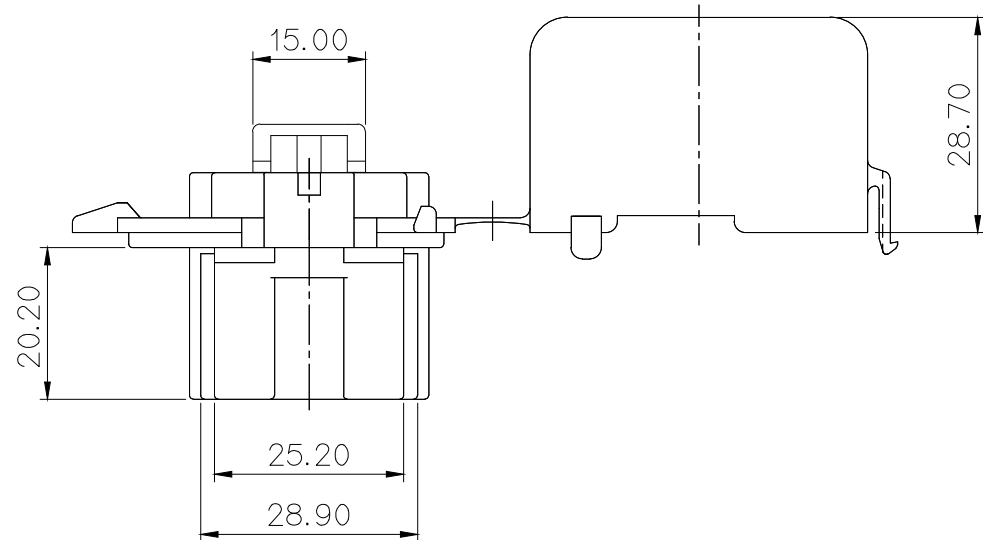
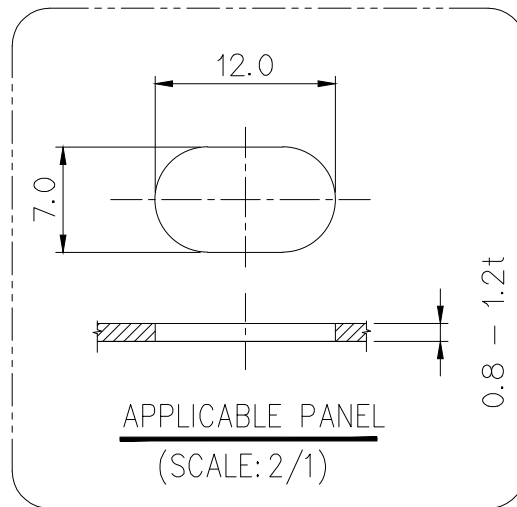


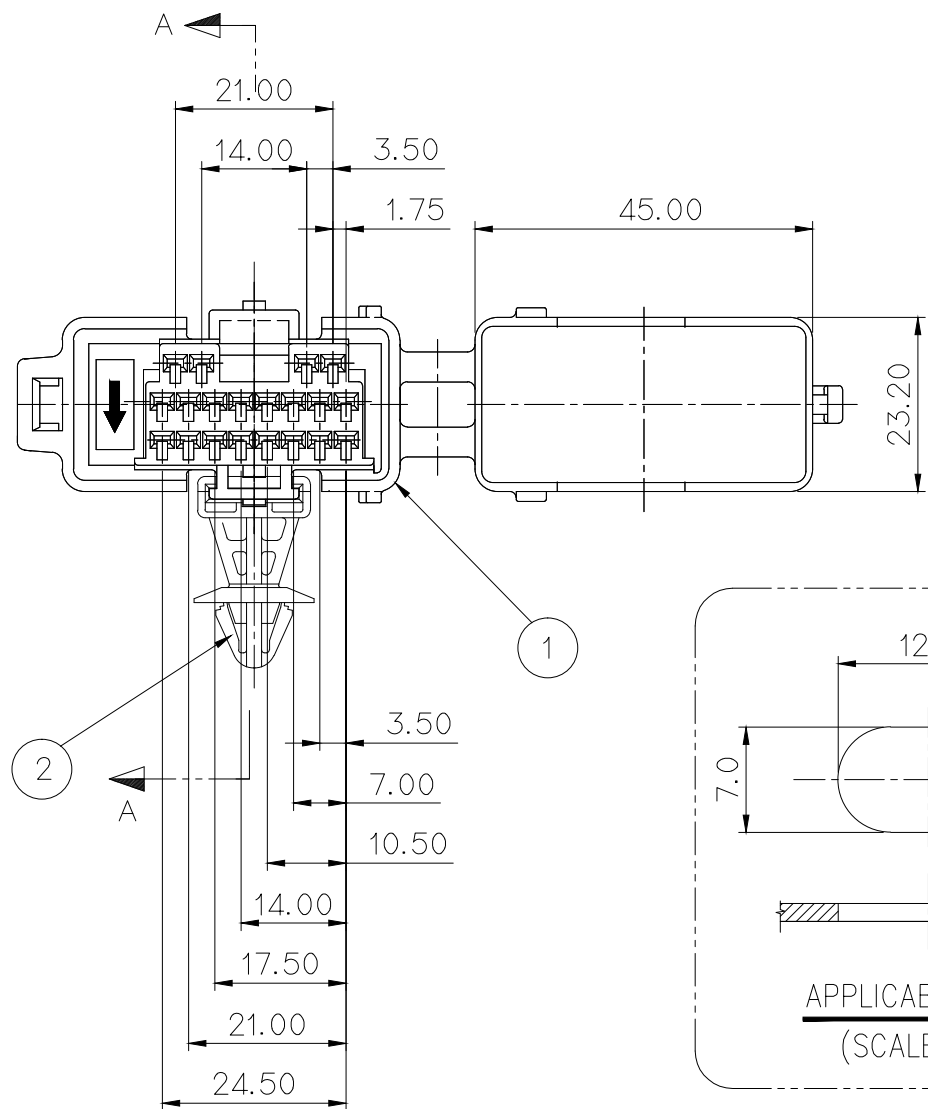


SECTION A-A

APPLICABLE PANEL
(SCALE: 2/1)

GENERAL TOLERANCE (HOUSING)							USED ON
10 MAX	50 MAX	100 MAX	250 MAX	250 VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

주 기

- 기능상 유해한 BURR 및 WELDLINE 등이 없을 것.
- 적용 REAR COVER : MG632867
- 적용 TERMINAL : ST730497, 498
- 적용 REAR HOLDER : MG630414-7
- 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

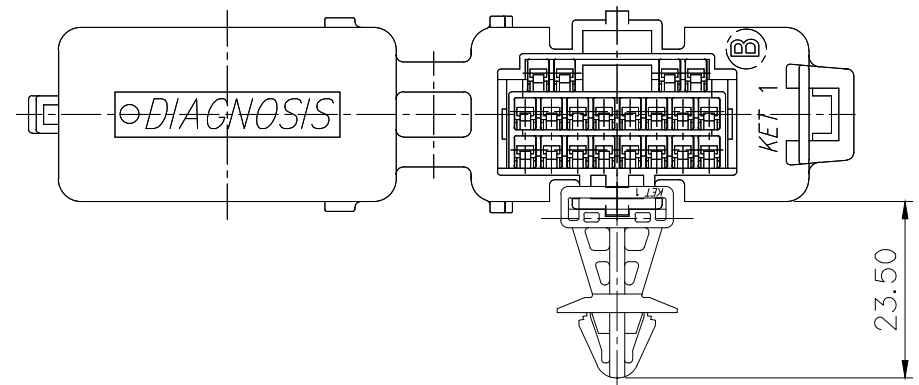

NOTE

- MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE REAR COVER : MG632867
- APPLICABLE TERMINAL : ST730497, 498
- APPLICABLE REAR HOLDER : MG630414-7
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

NO.	PART NO.	PART NAME	MATERIAL	COLOR
①	MG673657-5	DIAGNOSIS 20F HOUSING	NYLON66	BLACK
②	MG673091-5	DIAGNOSIS 20P PANNEL CLIP	NYLON66	BLACK

					MATERIAL	SEE TABLE	 KOREA ELECTRIC TERMINAL CO., LTD.	
					FINISH	SEE TABLE		
					WIRE RANGE	CLASS		
					INSULATION	TYPE		
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE	PART NO.
DR.	CKY 12.04.19					SEE TABLE	1/1	MG655676-5
CHK.						PART NAME	DIAGNOSIS 20F ASSY (PANNEL-B)	

APPROVED

2016-02-25

KOREA ELECTRIC
TERMINAL CO., LTD.
Product Development Team 1

ISSUE MAP