




MG655687
MG655688
PART NO.

CUSTOMER DRAWING




ISO VIEW

NO.	MATERIAL	COLOR
* 0	PBT	NATURAL
1		RED
2		BLUE
20		JADE
3		YELLOW
4		GRAY
40		DARK GRAY
* 41		LIGHT GRAY
5		BLACK
6		DARK GREEN
7		BROWN
8	LIGHT GREEN	
9	MAGENTA	
11	ORANGE	

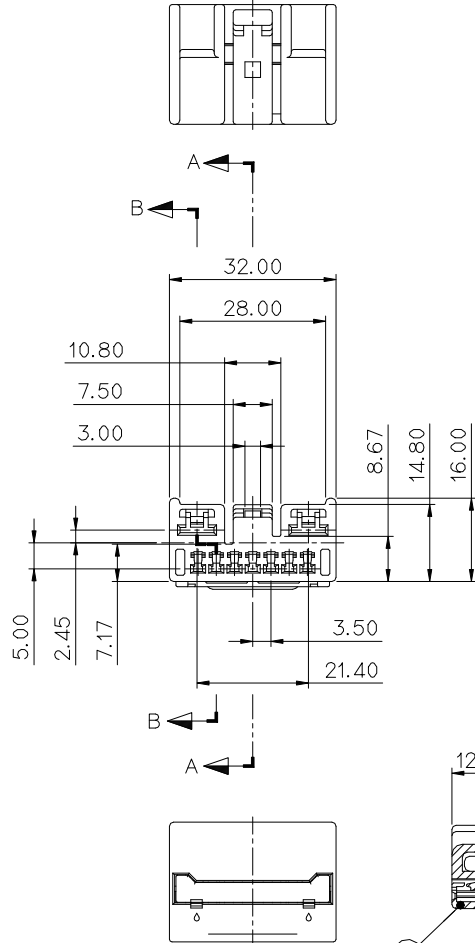


SECTION A-A



SECTION B-B

* 060250 9F ASSY (B) / MG655688





NO.	PART NAME	PART NO.	FINISH
1	060250 9F HOUSING (B)	MG675839	LIGHT GRAY
2	060250 9F SPACER	MG675840	YELLOW

DIMENSIONS IN MM

GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

~S. ~!_J

- 적용 CONNECTOR : JB520309, JB520310
- 적용 TERMINAL
060 : ST731267, 268, 269-3
250 : ST731209, 210, 211-3
- SPACER는 본 도면 과 같이 1차 LOCK'G 상태로 유지, 공급할 것
- 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.



NO.	PART NO.	PART NAME	MATERIAL	FINISH
1	MG675838	060250 9F HOUSING (A)	SEE TABLE	NATURAL
2	MG675840	060250 9F SPACER	SEE TABLE	YELLOW

NOTE

- APPLICABLE CONNECTOR : JB520309, JB520310
- APPLICABLE TERMINAL
060 : ST731267, 268, 269-3
250 : ST731209, 210, 211-3
- THE MOLD DRAWING IN THE SAME WAY, SPACER IS NORMAL CONDITION MAINTENANCE AND SUPPLY WITH FIRST LOCKING
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT, CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

ISSUE MARK

					MATERIAL	SEE TABLE	KET ENGINEERED	KOREA ELECTRIC TERMINAL CO., LTD.	
					FINISH	SEE TABLE			
					WIRE RANGE	CLASS			060+250
					INSULATION	TYPE			HYBRID
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE	PART NO.	
						SEE TABLE	1/1	MG655687 MG655688	
DR.	SEO.J.K	2013.09.10	CHK.	YUN.S.W	09/10				
CHK.	CHA.K.Y	09/10	APP.	CHOI.W.K	09/10				
							PART NAME		
							060250 9F ASSY (A), (B)		