CUSTOMER DRAWING

PART NO. MG655689 MG655690



ISO VIEW

NO.	PART NO.	PART NAME	MATERIAL	FINISH
1	MG675841	060110 10F HOUSING(A)	PBT	NATURAL
	MG675842	060110 10F HOUSING(B)		L/GRAY
2	MG675843	060110 10F SPACER		YELLOW

GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

060110 10F ASSY (A) (MG655689)	060110 10F ASSY (B) (MG655690)
	

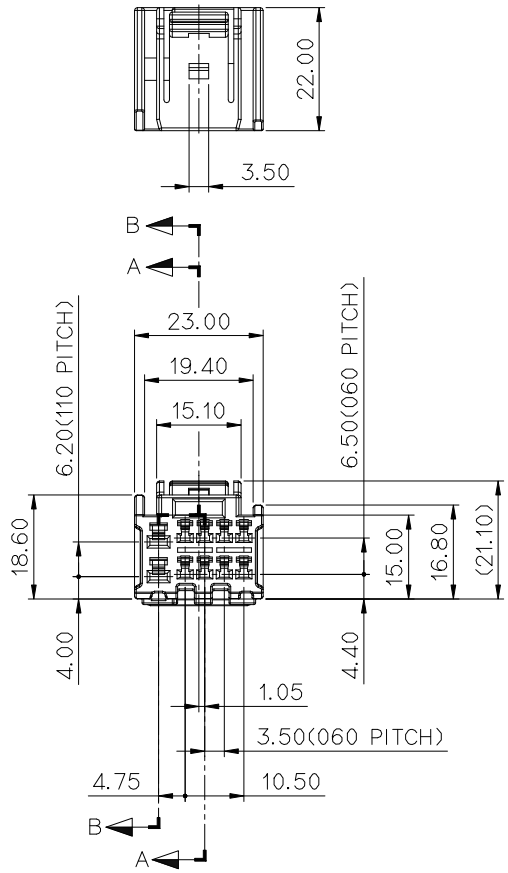





SECTION A–A
(060 LANCE)







SECTION B–B
(110 LANCE)

NOTE

1. MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE TERMINAL (060) : ST731267, 731268, 731269
   APPLICABLE TERMINAL (110) : ST731279, 731280, 731281
3. MATCHING HOUSING(MG655689) : JB520309
   MATCHING HOUSING(MG655690) : JB520310
4. THE MOLD DRAWING IN THE SAME WAY, SPACER IS NORMAL CONDITION MAINTENANCE AND SUPPLY WITH FIRST LOCKING
5. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION. SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION

~S__. ~!_J

1. 기능상 유해한 BURR 및 WELDLINE 등이 없을 것.
2. 적용 TERMINAL (060) : ST731267, 731268, 731269
   적용 TERMINAL (110) : ST731279, 731280, 731281
3. 상대 HOUSING(MG665589) : JB520309
   상대 HOUSING(MG665590) : JB520310
4. SPACER는 본 도면과 같이 1차 LOCK'G 상태로 유지, 공급할 것.
5. 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

ISSUE MARK

LTR	REVISION RECORD	DR. / CHK.	APP.	DATE

DR.	AJH 2012.06.20	CHK.	
CHK.	UYH 2012.06.20	APP.	HSH 2012.06.20

MATERIAL	SEE TABLE	KET ENGINEERED	KOREA ELECTRIC TERMINAL CO., LTD.
FINISH	SEE TABLE		
WIRE RANGE		CLASS	060+110
INSULATION		TYPE	
TOLERANCE EXCEPT AS NOTED	SEE TABLE	SCALE 1/1	PART NO. MG655689 MG655690
PART NAME	060110 10F ASSY (A), (B)		

(DIMENSIONS IN MM)