

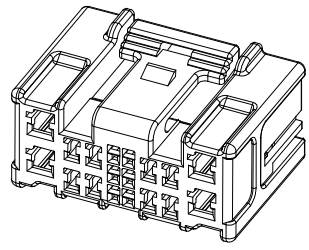


PART NO. MG655696

CUSTOMER DRAWING

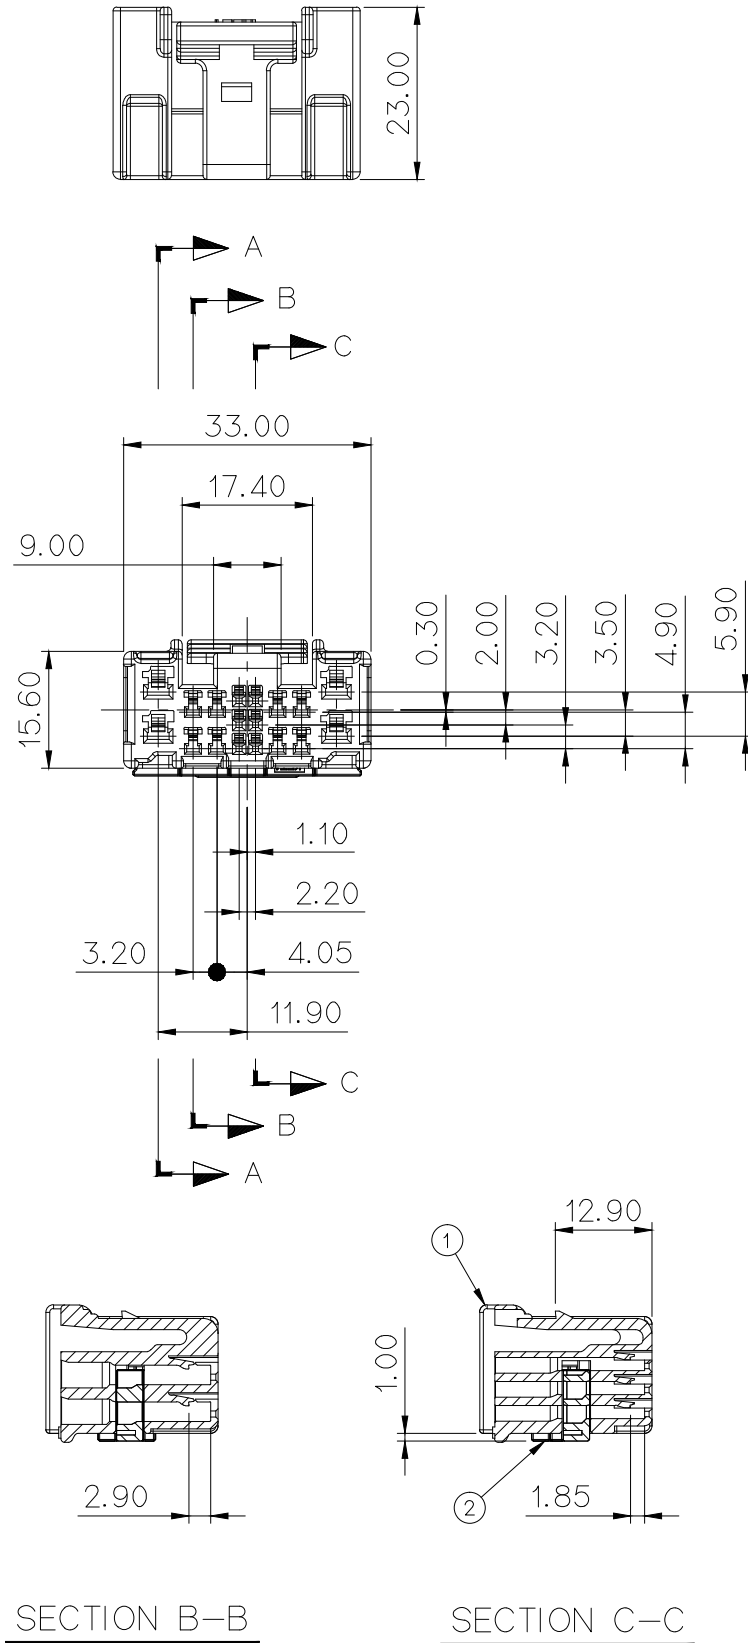

ISO VIEW



SECTION A-A

SECTION B-B



SECTION C-C

NO.	PART NAME	PART NO.	MATERIAL	COLOR	QTY.
1	025060110 18F HOUSING	MG675868	PBT	NATURAL	1
2	025060110 18F SPACER	MG675869	PBT	YELLOW	1

GENERAL TOLERANCE (HOUSING)										USED ON
10MAX	30MAX	50MAX	70MAX	100MAX	120MAX	250MAX	250VR	ANGLE	ECCENT	
±0.15	±0.2	±0.3	±0.4	±0.5	±0.75	±0.9	±1.4	±30'	0.1	

주 기

- 기능상 유해한 BURR 및 WELDLINE 등이 없을 것.
- 적용 TERMINAL(025II) : ST731374,731375-3
적용 TERMINAL(060) : ST731334,731335,731336-3
적용 TERMINAL(110) : ST731279,731280,731281-3
적용 CONNECTOR : MG645749
- 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.



NOTE

- MUST BE FREE OF FLASH, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE TERMINAL(025II) : ST731374,731375-3
APPLICABLE TERMINAL(060) : ST731334,731335,731336-3
APPLICABLE TERMINAL(110) : ST731279,731280,731281-3
APPLICABLE CONNECTOR : MG645749
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

APPROVED

2018-12-11

KOREA ELECTRIC
TERMINAL CO., LTD.
Product Development Team 1

ISSUE MARK

				MATERIAL SEE TABLE		KOREA ELECTRIC	
				FINISH SEE TABLE		TERMINAL CO., LTD.	
				WIRE RANGE		CLASS HYBRID	
				INSULATION		TYPE 025/060/110	
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED SEE TABLE	SCALE 1/1
DR.	WDH	13.12.05	CHK.			PART NO. MG655696	
CHK.			APP.			PART NAME 025060110 18F ASSY	

DIMENSIONS IN MM

KMH 13.12.05

CWK 13.12.05