

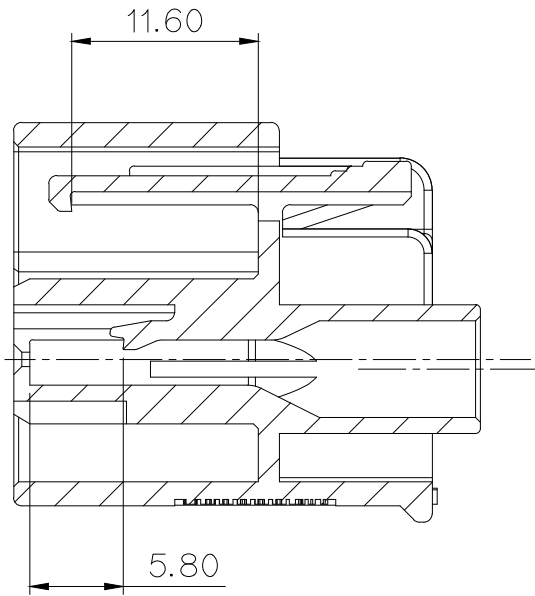


GENERAL TOLERANCE (HOUSING)										USED ON
10MAX	30MAX	50MAX	70MAX	100MAX	120MAX	250MAX	250VR	ANGLE	ECCENT	
±0.15	±0.2	±0.3	±0.4	±0.5	±0.75	±0.9	±1.4	±30'	0.1	

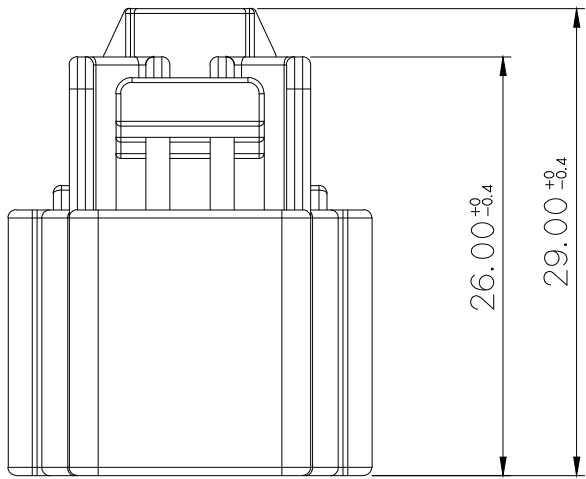

SECTION A-A



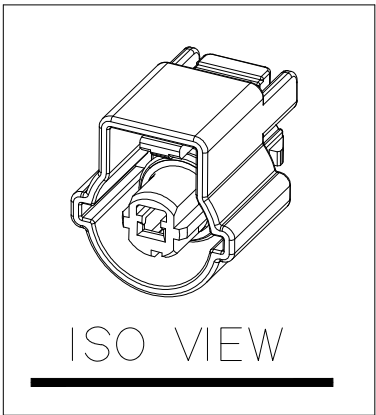


주 기

- 1.지시하지 않은 반경 R은 0.5로 한다
- 2.지시하지 않은 모따기 C는 0.5으로 한다.
3. 기능상 유해한 BURR 및 WELDLINE 등이 없을 것.
- 4.적용 TERMINAL(110) : ST731152, 1153-3
적용 REAR HOLDER: MG635627
적용 WIRE SEAL(110): MG680470, 0564
- 5.제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NOTE

1. UNLESS OTHERWISE SPECIFIED ALL RADIUS TO BE 0.5 RADIUS.
2. UNLESS OTHERWISE SPECIFIED ALL CHAMFERS TO BE 0.5 CHAMFER.
3. MUST BE FREE OF FLASH, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
4. APPLICABLE TERMINAL(110) : ST731152, 1153-3
APPLICABLE REAR HOLDER : MG635627
APPLICABLE WIRE SEAL(110) : MG680470, 0564
5. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

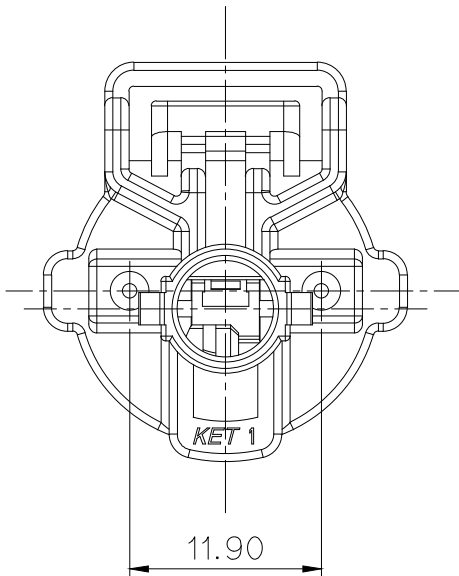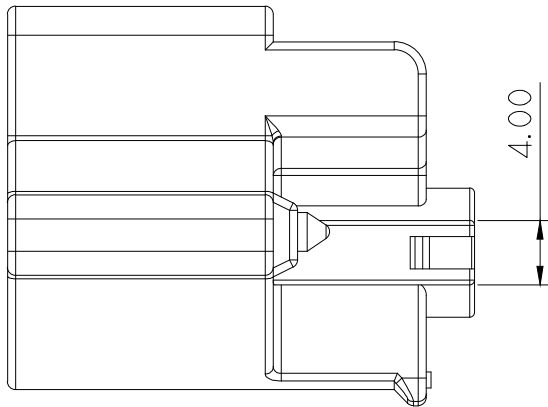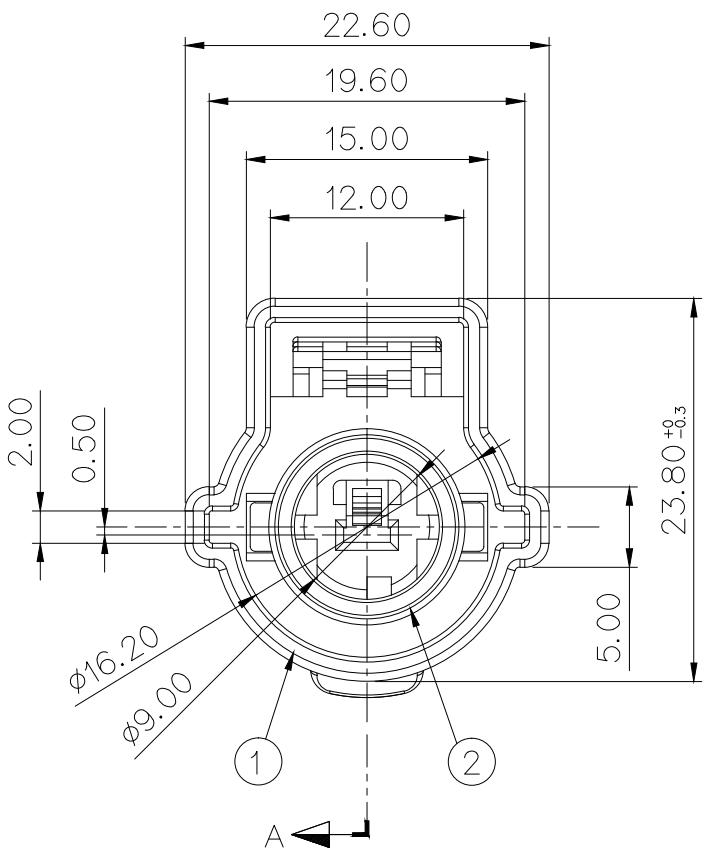

NO.	PART NAME	PART NO.	MATERIAL	COLOR	QTY.
1	110 WP 1F HOUSING	MG675874	PBT	BLACK	1
2	110 WP 1F INNER SEAL	R602570	SILICONE	RED	1

						MATERIAL		SEE TABLE	 KOREA ELECTRIC TERMINAL CO., LTD.
						FINISH		SEE TABLE	
						WIRE RANGE		CLASS	
						INSULATION		TYPE 110	
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE 2/1	PART NO. MG655698
DR.	WDH	2013.12.03	CHK.			PART NAME			
CHK.	KMH	2013.12.03	APP.	CWK	2013.12.03	110 WP 1F HOUSING			

APPROVED

2018-12-07

KOREA ELECTRIC
TERMINAL CO., LTD.
Product Development Team 1

ISSUE MARK