

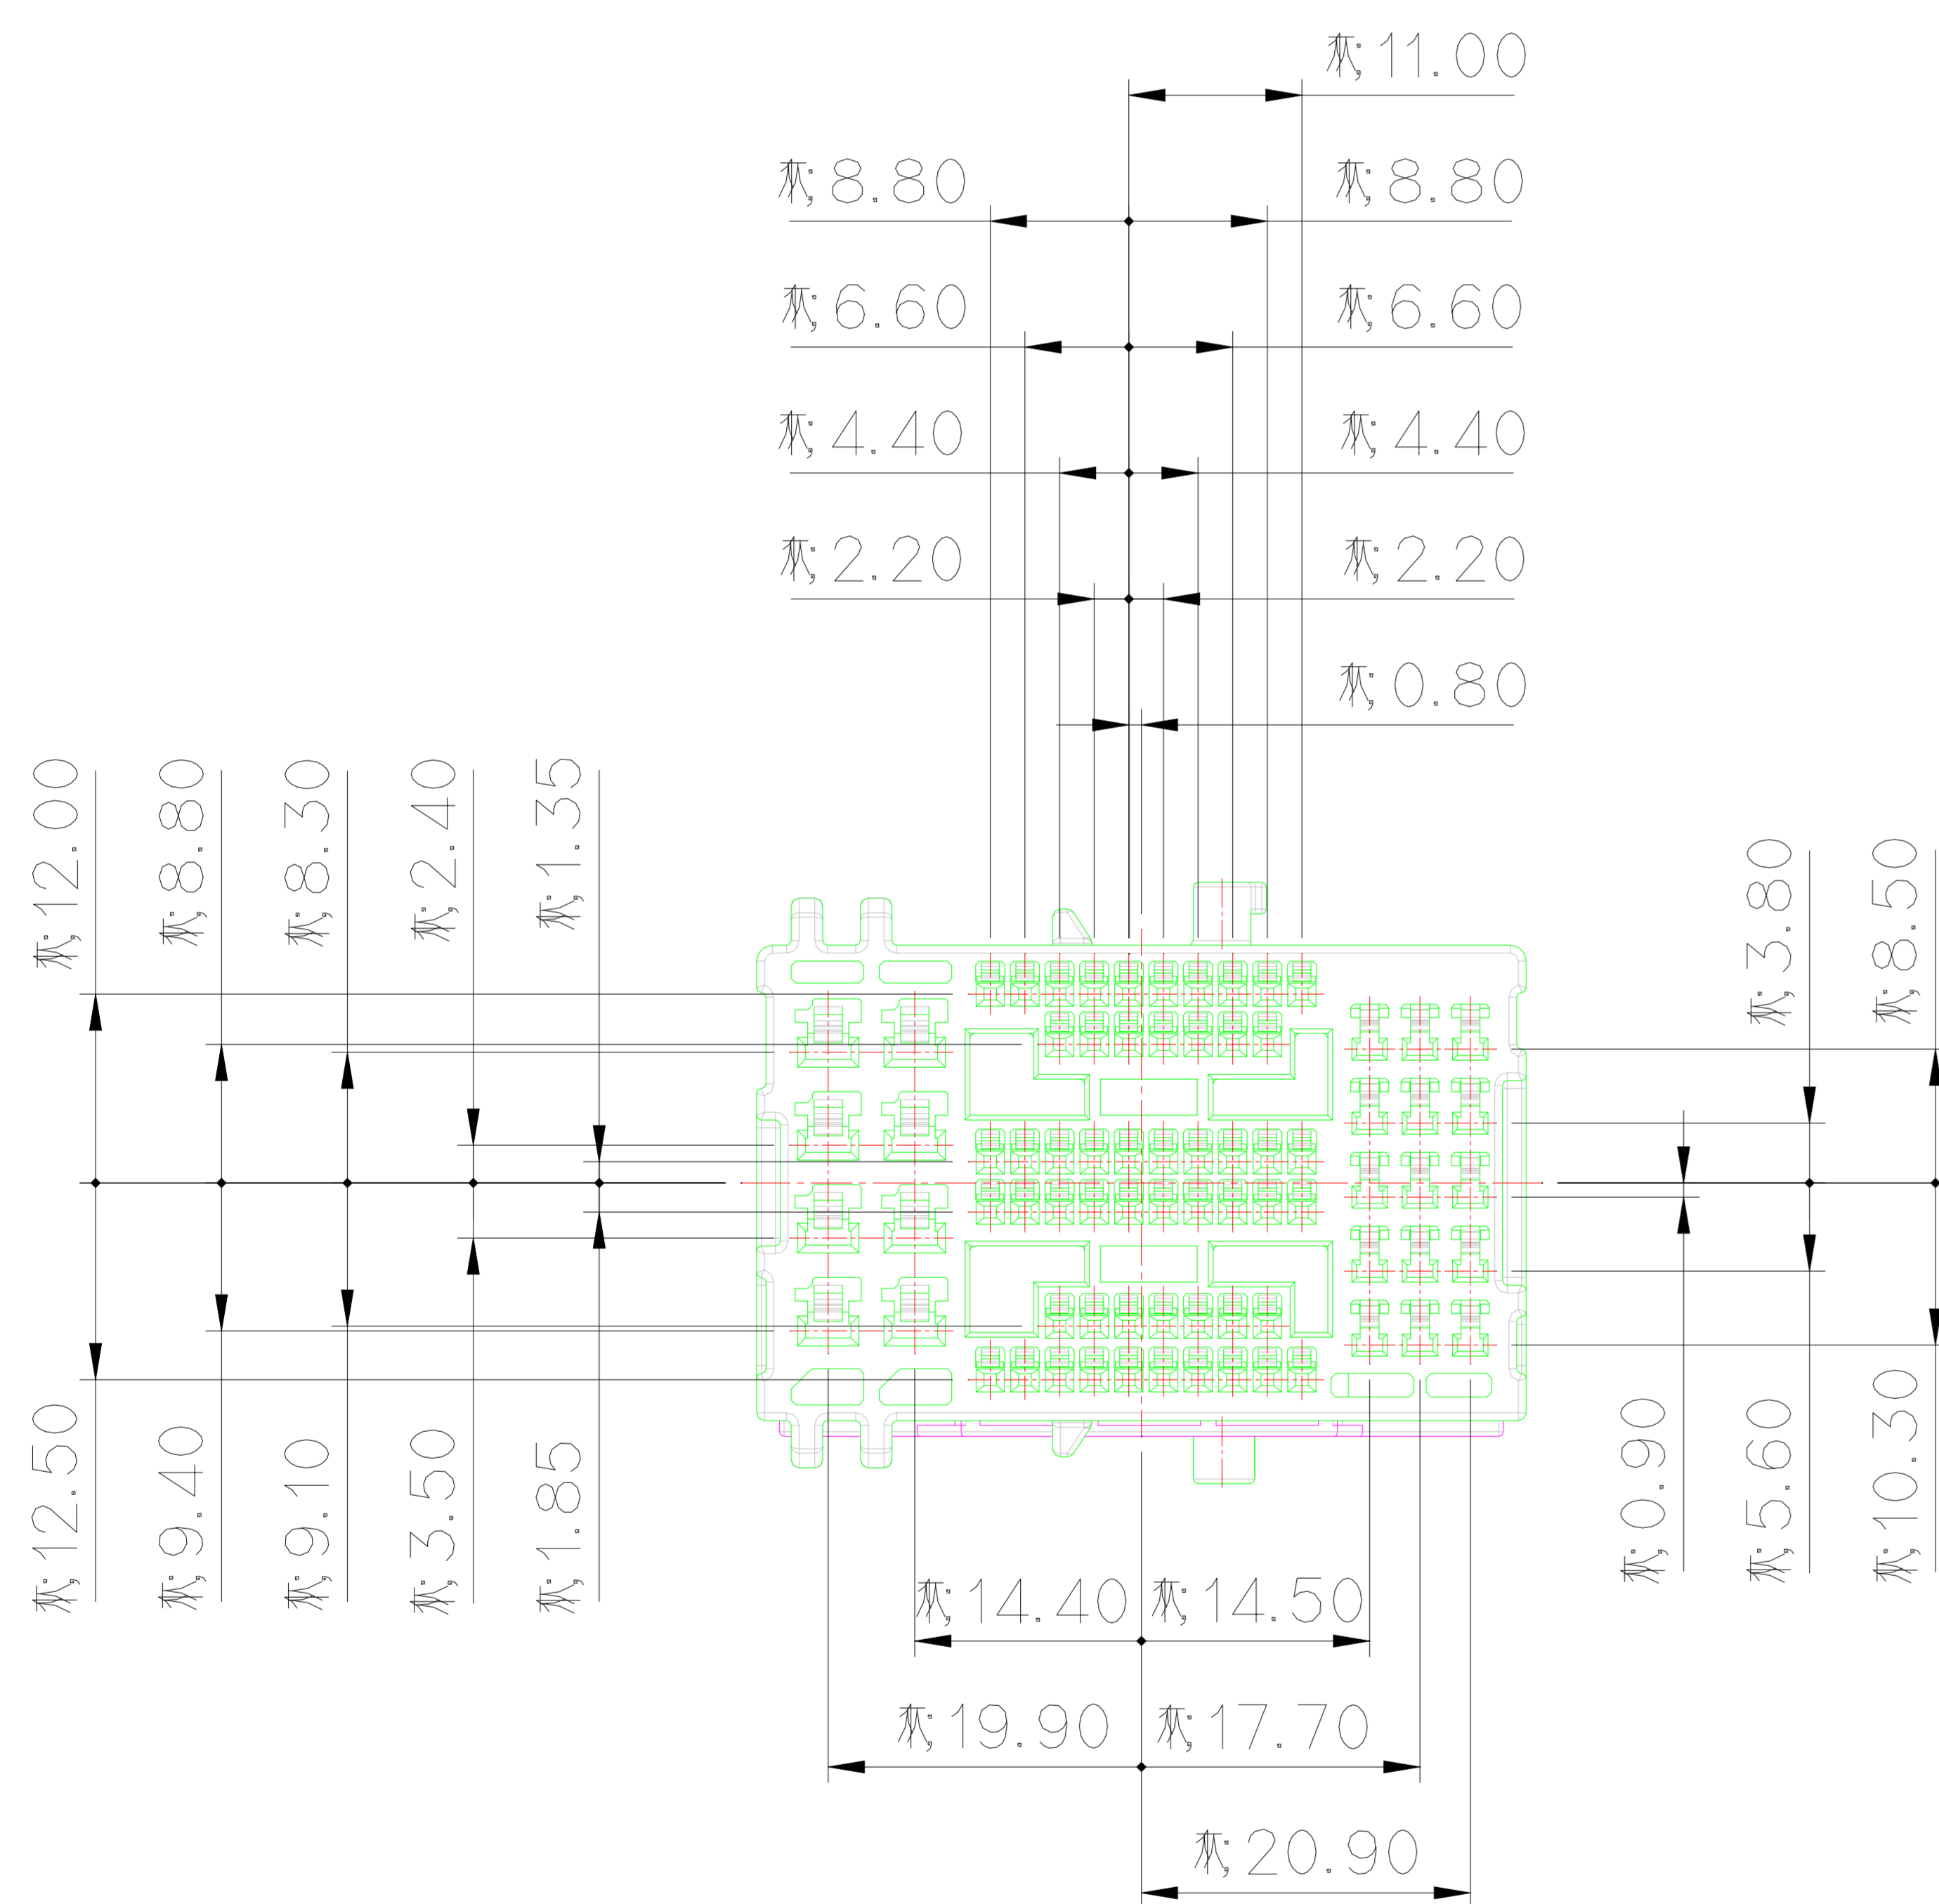
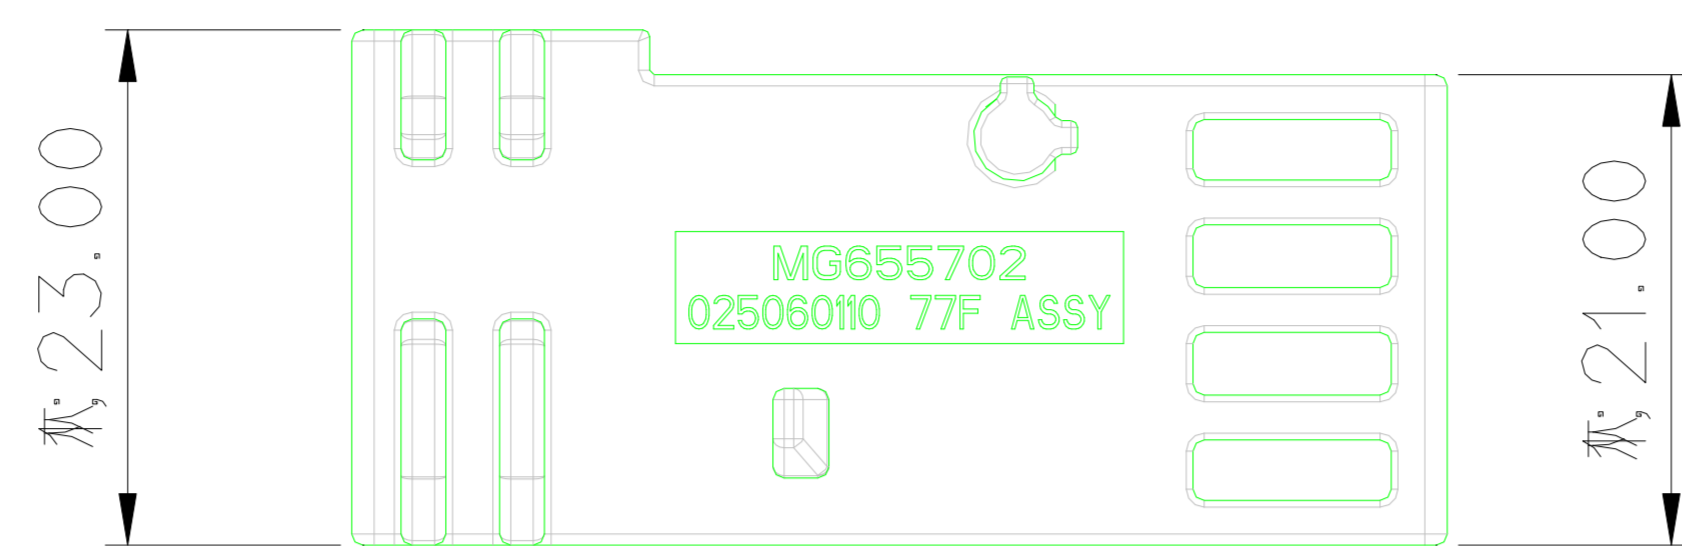


ISO VIEW

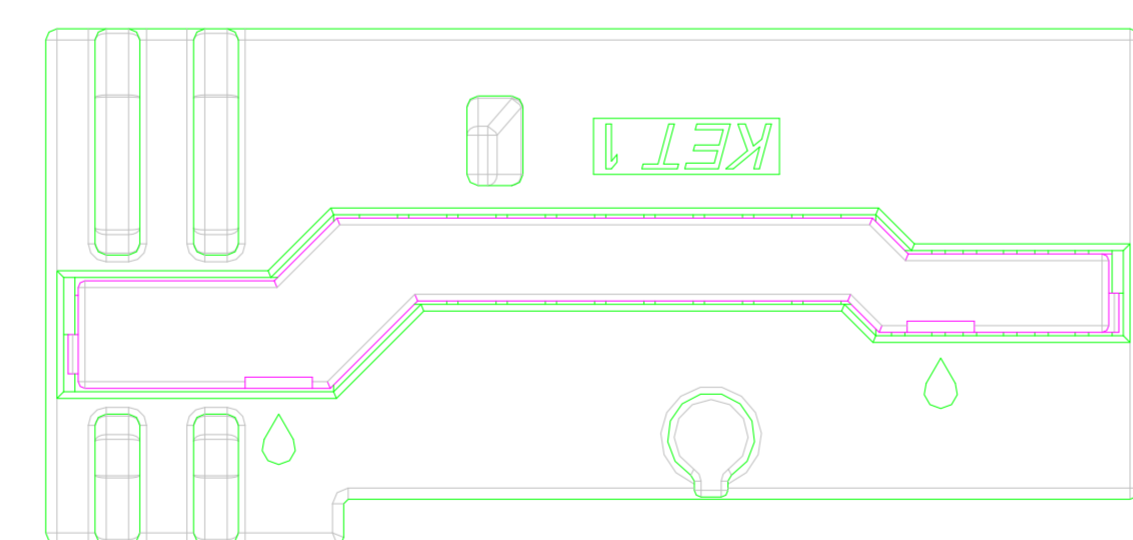


PITCH DETAIL

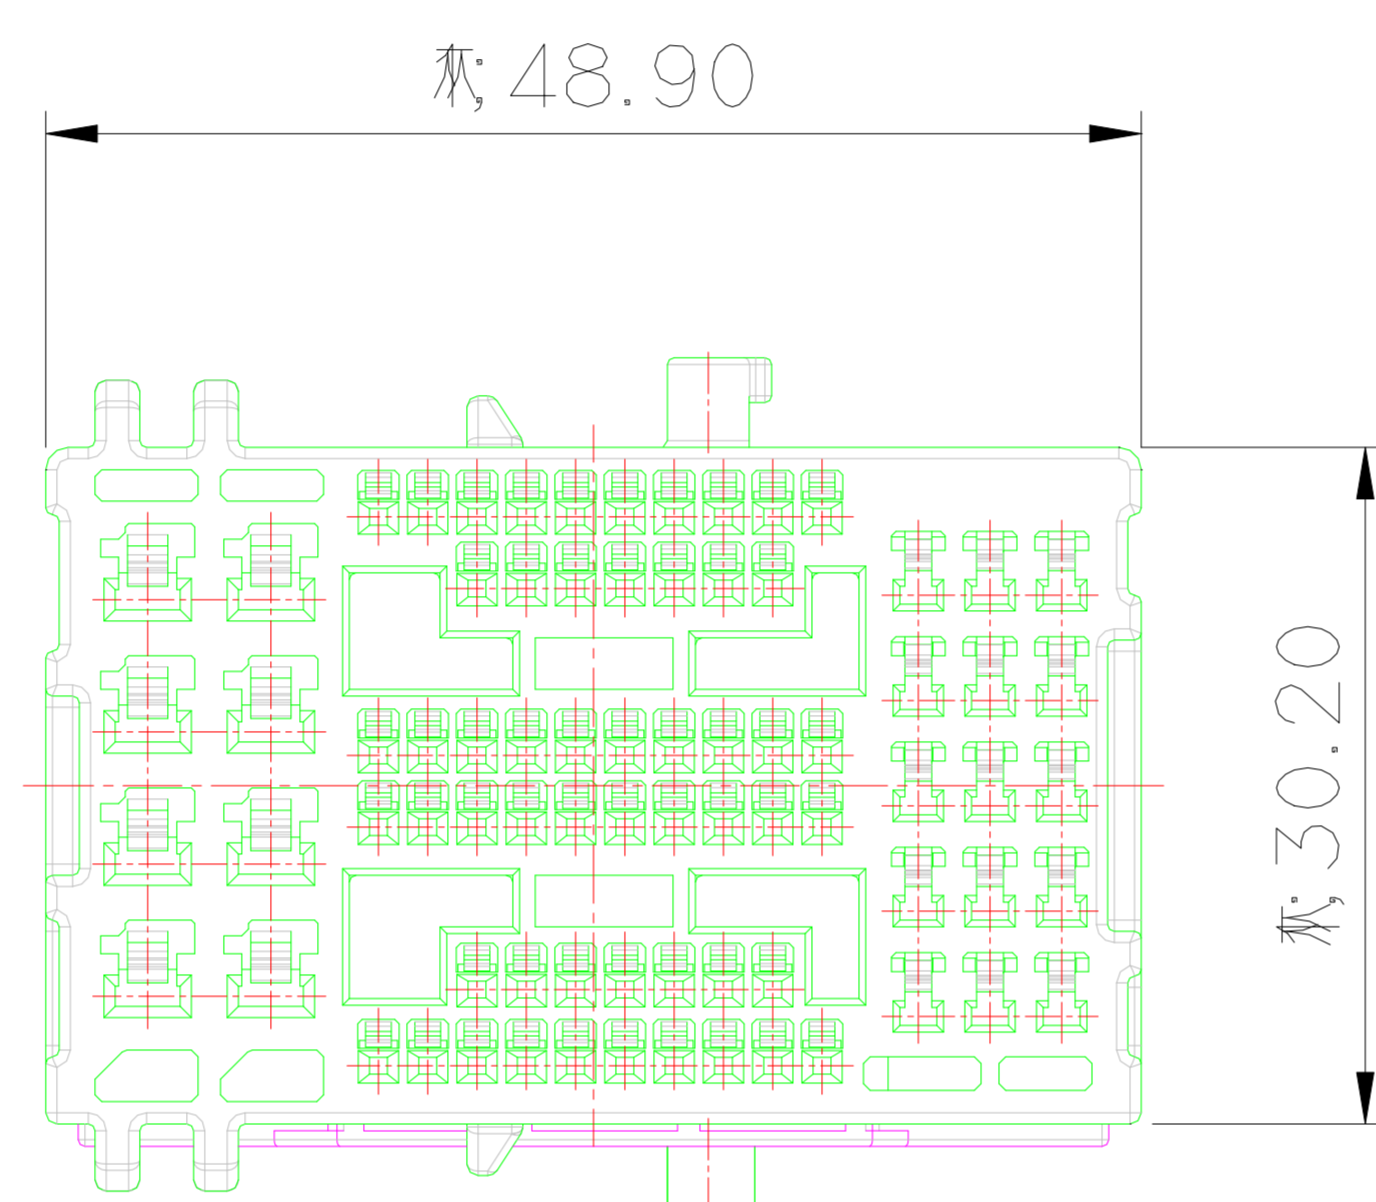

GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

주 기

- 기능상 유해한 BURR 및 WELDLINE 등이 없을 것.
- 적용 TERMINAL(025II) : ST731374, 1375-3  
적용 TERMINAL(060) : ST731334, 1335, 1336-3  
적용 TERMINAL(110) : ST731279, 1280, 1281-3  
적용 CONNECTOR : MG645756
- 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

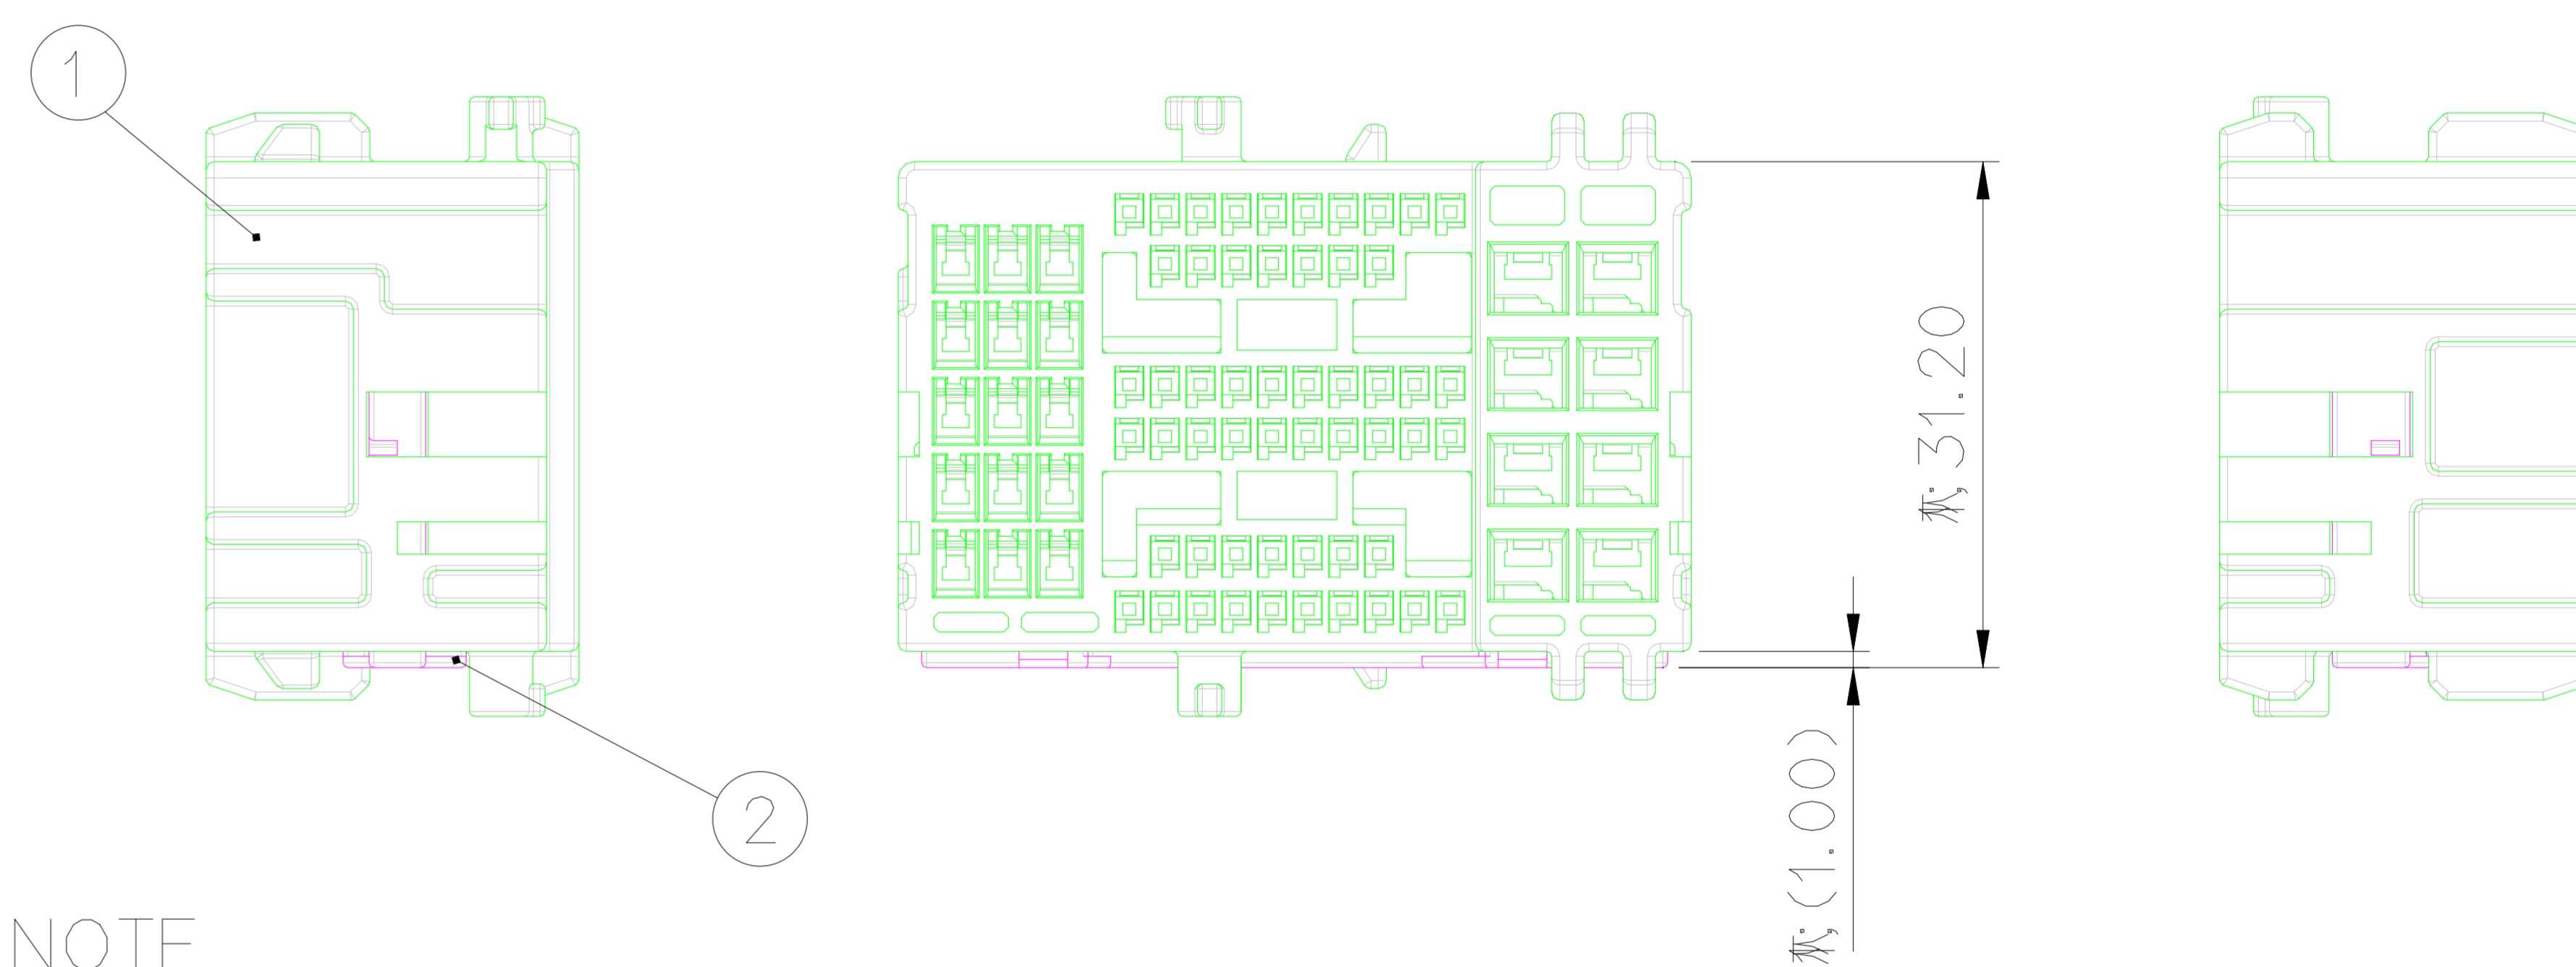

NOTE

- MUST BE FREE OF FLASH, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE TERMINAL(025) : ST731374, 1375-3  
APPLICABLE TERMINAL(060) : ST731334, 1335, 1336-3  
APPLICABLE TERMINAL(110) : ST731279, 1280, 1281-3  
APPLICABLE CONNECTOR : MG645756
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

ISSUE MARK

NO.	PART NAME	PART NO.	MATERIAL	COLOR	QTY.
1	025060110 77F HOUSING	MG675882	PBT	NATURAL	1
2	025060110 77F SPACER	MG675883-3	PBT	YELLOW	1

		MATERIAL	SEE TABLE	KET KOREA ELECTRIC TERMINAL CO., LTD.	
		FINISH	SEE TABLE		
		WIRE RANGE		CLASS	HYBRID
		INSULATION		TYPE	025/060/110
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE
DR.	AJH 2012.11.14	CHK.	KMH	APP.	2012.11.14
CHK.	CWK 2012.11.14	APP.	HSH		2012.11.14
		TOLERANCE EXCEPT AS NOTED	SEE TABLE	SCALE	1/1
		PART NAME	025060110 77F ASSY		
		PART NO.	MG655702		