
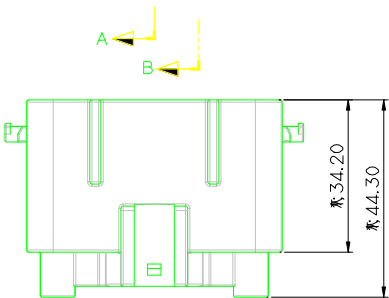
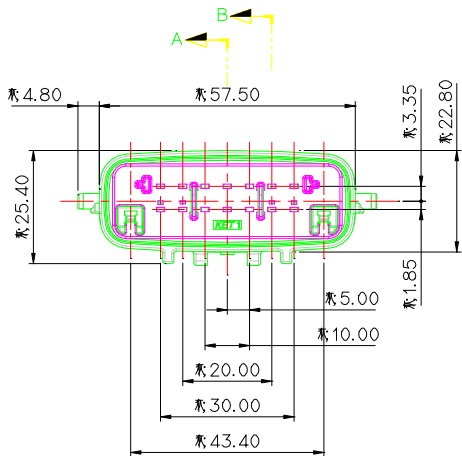



ISO VIEW

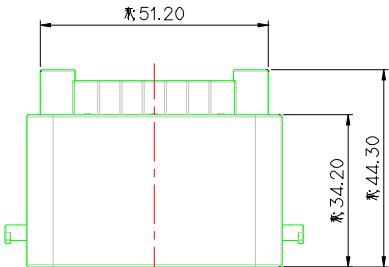


GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

NOTE


- MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE TERMINAL(060) : ST741340, 1341, 1342
 TERMINAL(110) : ST741288, 1289
 WIRE SEAL(060) : MG685389, 5390, 5391, 5392, 5393
 WIRE SEAL(110) : MG680470, 0564
 DUMMY SEAL : (060)MG685394 / (110)MG680905
 CLIP : MG631471, 2019, 1267, 1929, 1268
 FEMALE ASSY : MG645758
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.



SECTION B-B



SECTION A-A

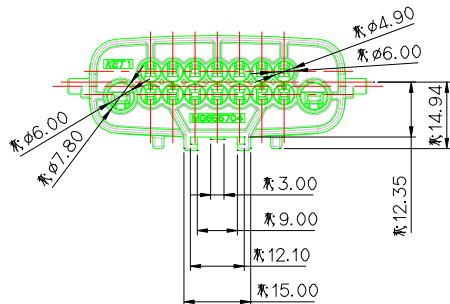

주 기

- 기능상 유해한 BURR 및 WELDLINE 등이 없을 것.
- 적용 TERMINAL(060) : ST741340, 1341, 1342
 적용 TERMINAL(110) : ST741288, 1289
 WIRE SEAL(060) : MG685389, 5390, 5391, 5392, 5393
 WIRE SEAL(110) : MG680470, 0564
 DUMMY SEAL : (060)MG685394 / (110)MG680905
 CLIP : MG631471, 2019, 1267, 1929, 1268
 FEMALE ASSY : MG645758
- 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안 된다.



ISSUE MARK

NO.	PART NO.	PART NAME	MATERIAL	FINISH
①	MG675890-5	060110 WP 16M HSOSING	PBT	BLACK
②	MG675891	060110 WP 16M F/HOLDER	PBT	NATULA

LTR		REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED		SCALE	PART NO.
DR.	JSY	2012.11.22		CHK.				SEE TABLE	1/1		MG655704-5
CHK.				APP.				PART NAME		060110 WP 16M ASSY	

MATERIAL	SEE TABLE	KIET KOREA ELECTRIC ENGINEERED TERMINAL CO., LTD.
FINISH	BLACK	
WIRE RANGE		CLASS 060110
INSULATION		TYPE WP
PART NAME		060110 WP 16M ASSY

