

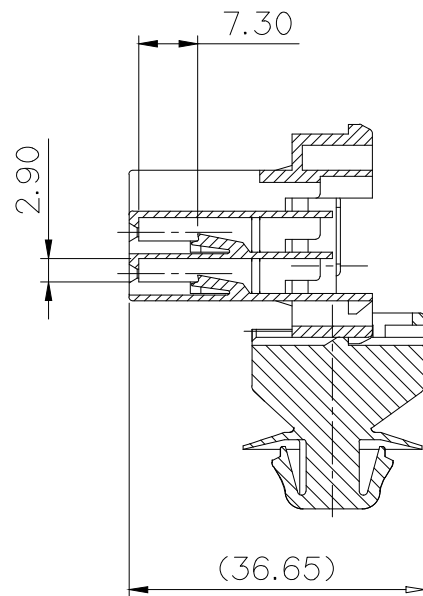
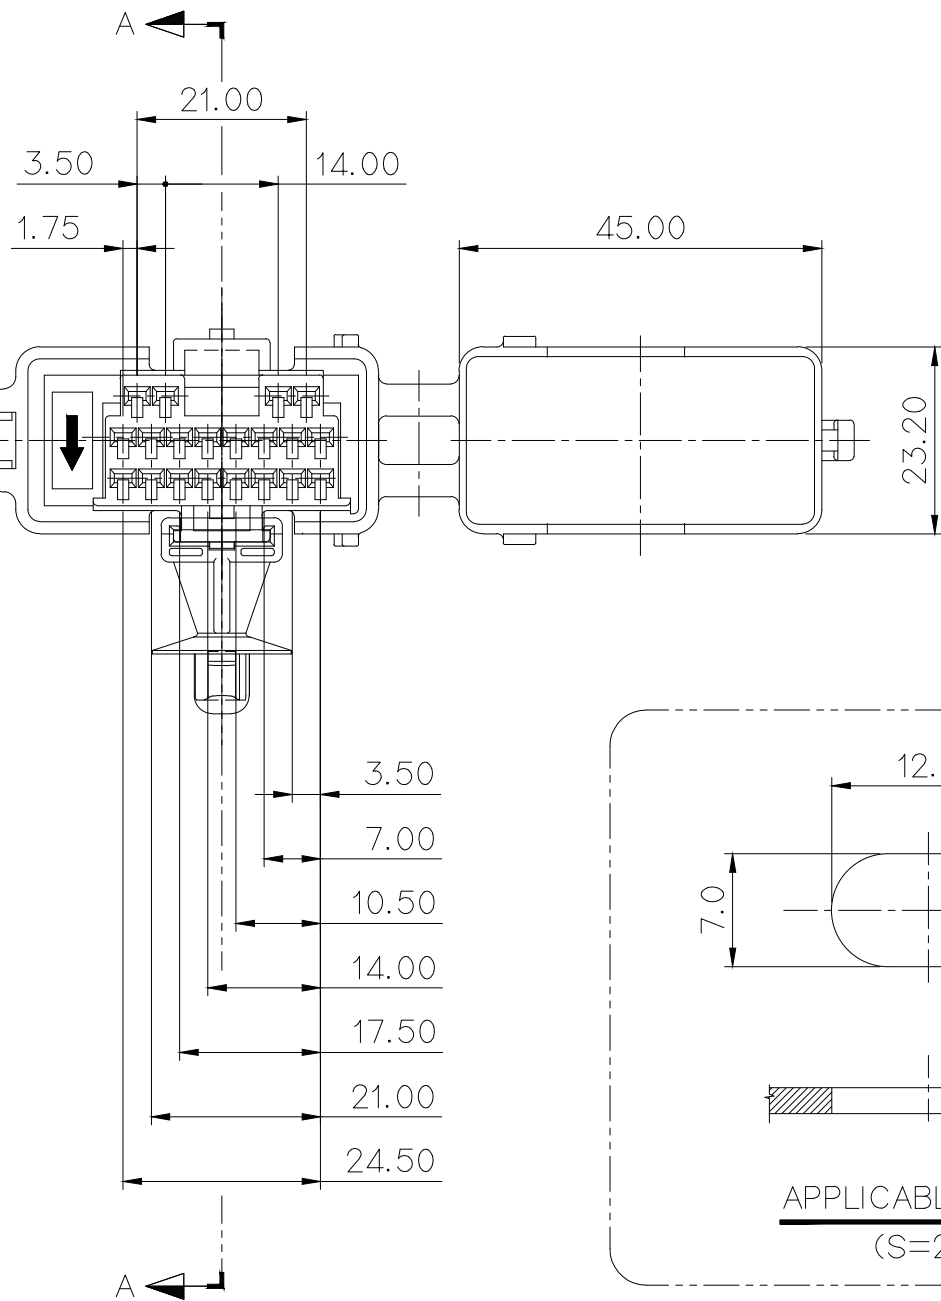
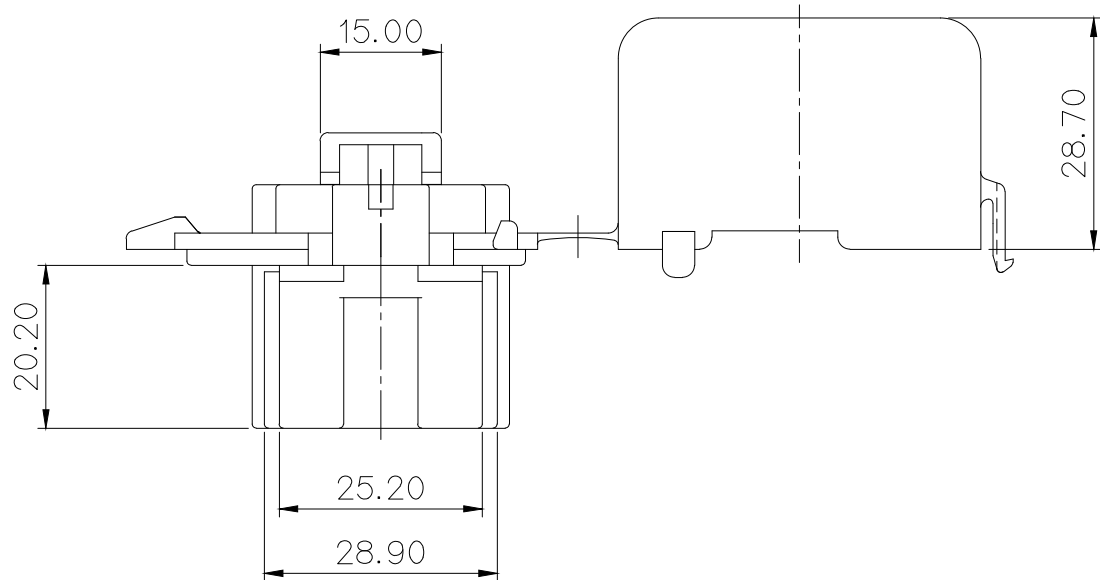


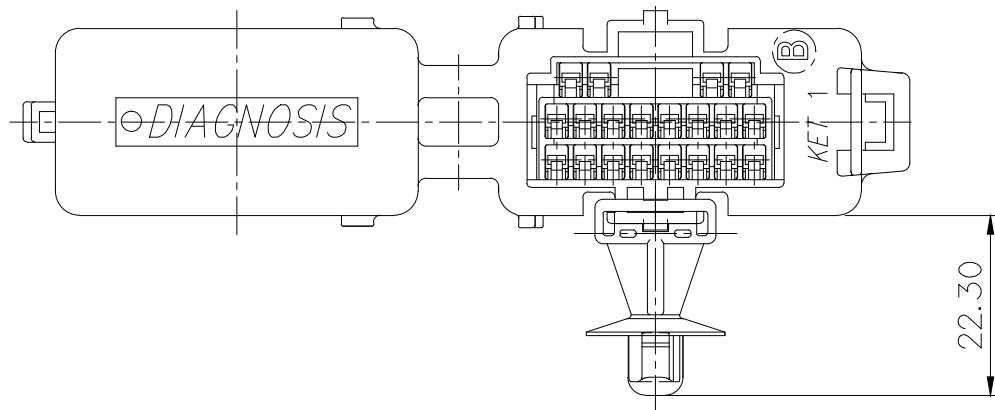

SECTION A-A

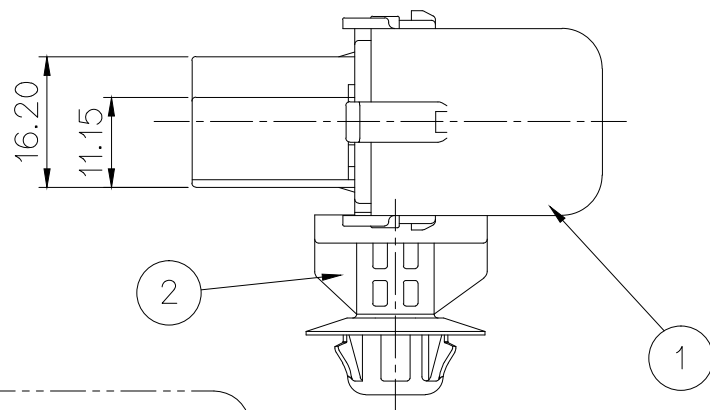

주 기

- 1.기능상 유해한 BURR 및 WELDLINE등이 없을 것.
- 2.적용 REAR COVER : MG635624-5
- 3.적용 TERMINAL : ST730497,498
- 4.적용 REAR HOLDER : MG630414-7
5. 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NOTE

1. MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE REAR COVER : MG635624-5
3. APPLICABLE TERMINAL : ST730497, 498
4. APPLICABLE REAR HOLDER : MG630414-7
5. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

NO.	PART NO.	PART NAME	MATERIAL	COLOR
①	MG673657-5	DIAGNOSIS 20P HS'G	PA66	BLACK
②	MG675901-5	DIAGNOSIS 20F CLIP (SLOT 7*12)	PA66	BLACK

GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

						MATERIAL		SEE TABLE	 KOREA ELECTRIC TERMINAL CO., LTD.		
						FINISH		SEE TABLE			
						WIRE RANGE		CLASS			
						INSULATION		TYPE			
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SEE TABLE	SCALE 1/1	PART NO.	MG655707-5
DR.	AJH 2012.11.12		CHK.	KMH 2012.11.13							
CHK.	CWK 2012.11.13		APP.	HSH 2012.11.13				PART NAME			
											DIAGNOSIS 20F ASSY (SLOT 7*12)

APPROVED

2016-03-09

KOREA ELECTRIC
TERMINAL CO., LTD.
Product Development Team 1

ISSUE MARK