

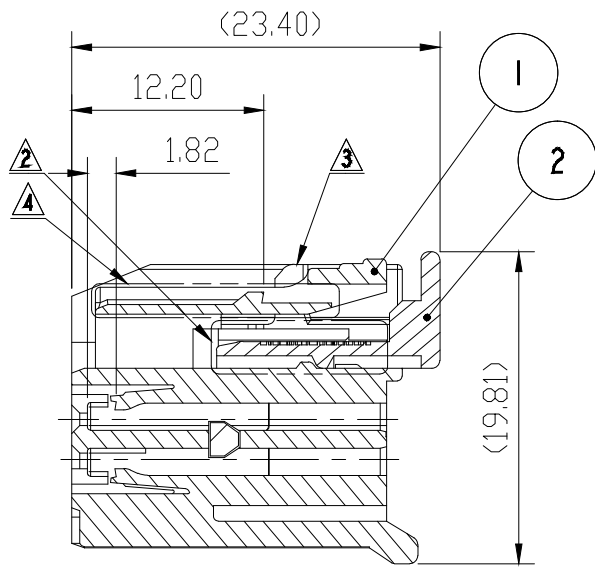


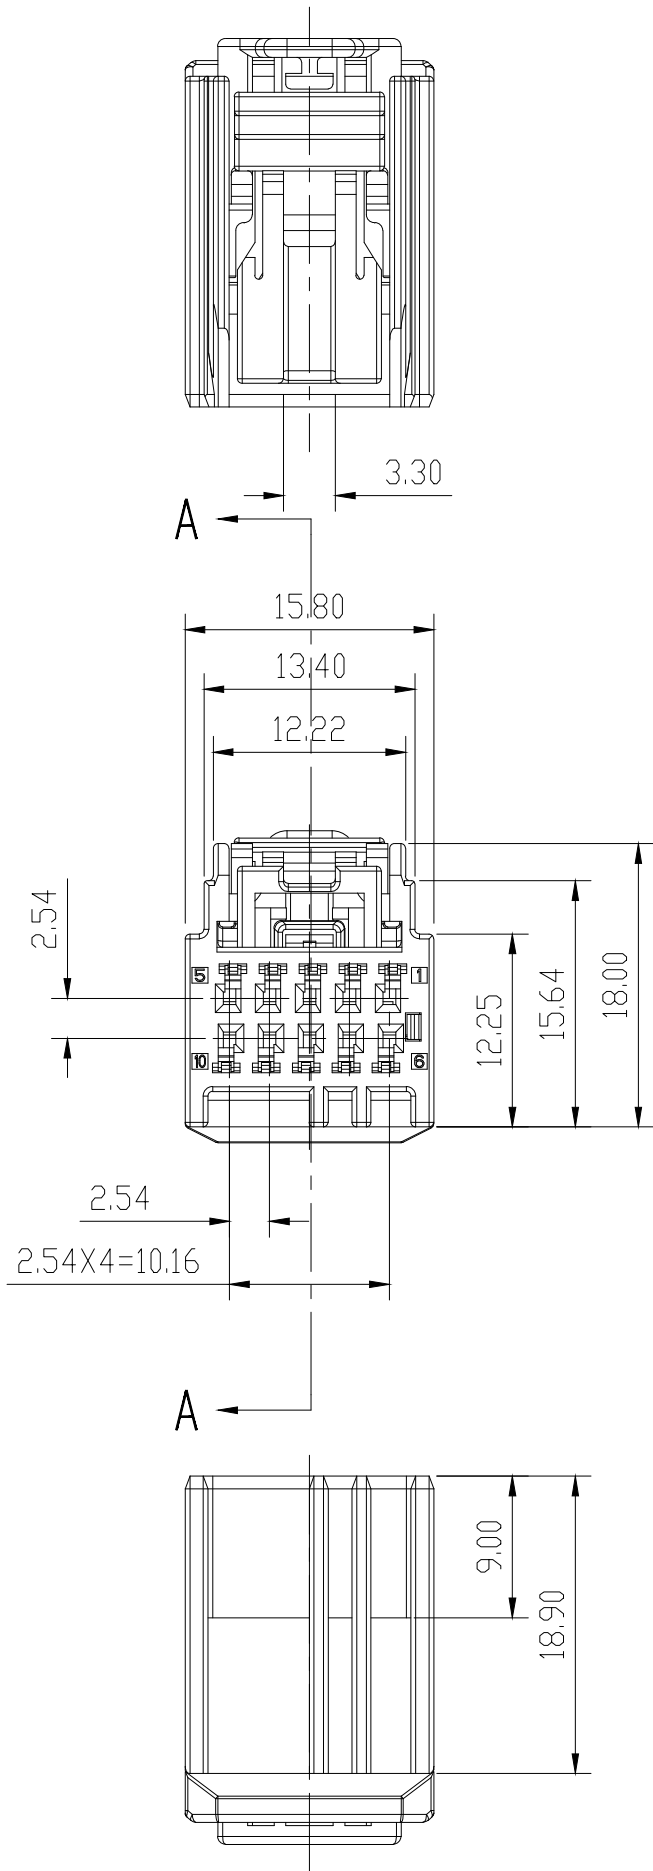

SECTION A-A



DETAIL B


SCALE 6/1

NO	PART NAME	PART NO	MATERIAL	COLOR	QTY
1	064 10F HOUSING (A)	MG675946-5	PBT-GF15	BLACK	1EA
1	064 10F HOUSING (B)	MG677025-4	PBT-GF15	GRAY	1EA
2	064 10F CPA	MG674226-2	PBT	BLUE	1EA



GENERAL TOLERANCE (HOUSING)

10 MAX	30 MAX	50 MAX	70 MAX	100 MAX	120 MAX	250 MAX	250 VR	ANGLE	ECCENT	USED ON
±0.15	±0.20	±0.30	±0.40	±0.5	±0.75	±0.90	±1.4	±30'	0.1	

064 10F ASSY (A)
MG655723-5

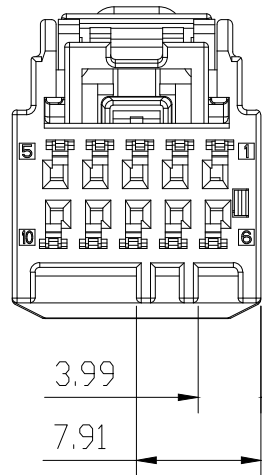

064 10F ASSY (B)
MG656968-4

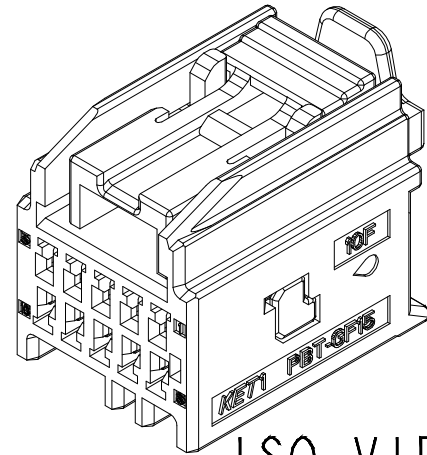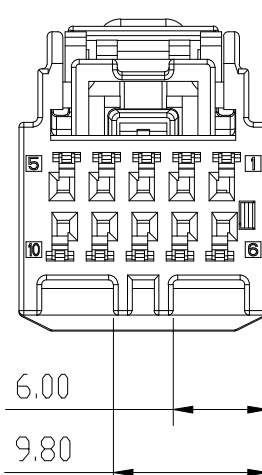

ISO VIEW

APPROVED

2019-11-06

KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.

주 기

1. 기능상 유해한 BURR 및 WELDLINE 등이 없을 것,
2. 적용 TERMINAL ; ST731068-3
TPA ; MG635648-3

3. CPA는 1차 LOCK 상태로 유지, 공급 할 것
4. 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다,

NOTE

1. MUST BE FREE OF FLASH, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE TERMINAL ; ST731068-3
TPA ; MG635648-3

3. MALE ASSY ; MG646042-5 (A TYPE), UNIT (BTYPE)
3. CPA IS SUPPORT WITH THE 1st LOCK CONDITION
4. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

ISSUE MARK

						MATERIAL		SEE TABLE			KOREA ELECTRIC TERMINAL CO., LTD.
	ECO-1807-035 근거 도면 제작성	KCS	-	SSH	'18.07.04	FINISH		SEE TABLE			
	ECO-1806-074 근거 도면 제작성	JH	KSC	CJH	'18.06.07	WIRE RANGE		CLASS		064	
	ECO-1803-272 근거 도면 제작성	KCS	YSW	SSH	'18.03.22	INSULATION		TYPE		-	
	ECO-1709-349 근거 도면 제작성	KCS	YSW	SSH	'17.10.12						
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SEE TABLE	SCALE 2/1	PART NO.	MG655723-5	
DR. KSY, 2017, 04, 27		CHK,									
CHK, SSH, 2017, 04, 27		APP, LJE, 2017, 04, 27				PART-NAME		064 10F ASSY (A, B)			

064 10F ASSY (A, B)