
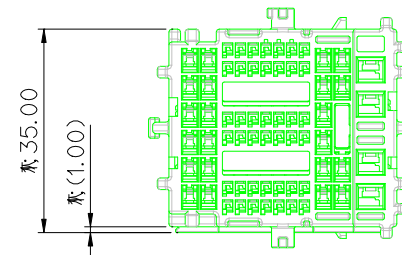

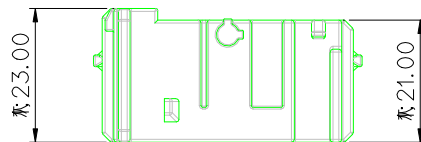



ISO VIEW

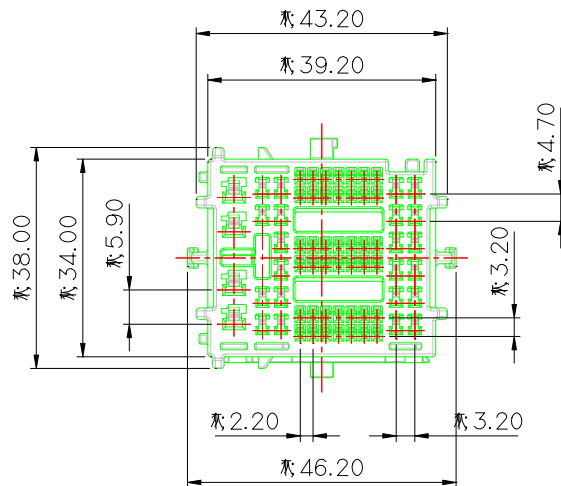

GENERAL TOLERANCE (HOUSING)

USED ON

10MAX	30MAX	50MAX	70MAX	100MAX	120MAX	250MAX	250VR	ANGLE	ECCENT	
±0.15	±0.2	±0.3	±0.4	±0.5	±0.75	±0.9	±1.4	±30'	0.1	

NOTE

- MUST BE FREE OF FLASH, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE TERMINAL(025) : ST731374, 1375-3  
 APPLICABLE TERMINAL(060) : ST731334, 1335, 1336-3  
 APPLICABLE TERMINAL(110) : ST731279, 1280, 1281-3  
 APPLICABLE CONNECTOR : MG645775
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

주 기

- 기능상 유해한 BURR 및 WELDLINE 등이 없을 것.
- 적용 TERMINAL(025) : ST731374, 1375-3  
 적용 TERMINAL(060) : ST731334, 1335, 1336-3  
 적용 TERMINAL(110) : ST731279, 1280, 1281-3  
 적용 CONNECTOR : MG645775
- 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

APPROVED

2015-06-25

KOREA ELECTRIC  
 TERMINAL CO., LTD.  
 Connector Development Team 1

ISSUE MARK

NO.	PART NAME	PART NO.	MATERIAL	COLOR	QTY.
1	025060110 68F HOUSING	MG675978	PBT	NATURAL	1
2	025060110 68F SPACER	MG675979	PBT	YELLOW	1

		MATERIAL		SEE TABLE		KOREA ELECTRIC	
		FINISH		SEE TABLE		TERMINAL CO., LTD.	
		WIRE RANGE				CLASS	
		INSULATION				TYPE 025/060/110	
LTR		REVISION RECORD		DATE		PART NO.	
DR.		2013.05.28		2013.05.30		MG655730	
CHK.		2013.05.28		2013.05.28			
APP.		2013.05.28		2013.05.28			
		TOLERANCE EXCEPT AS NOTED		SCALE 2/1		PART NAME	
		SEE TABLE		2/1		025060110 68F ASSY	