

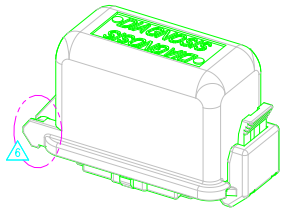
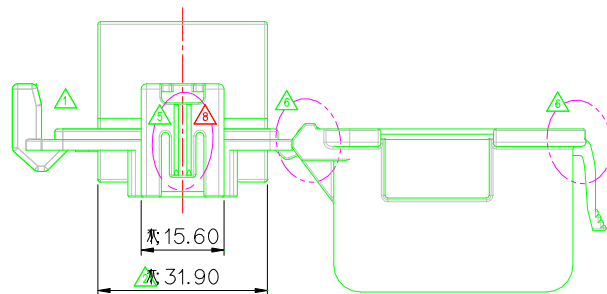


완제품 납입사양

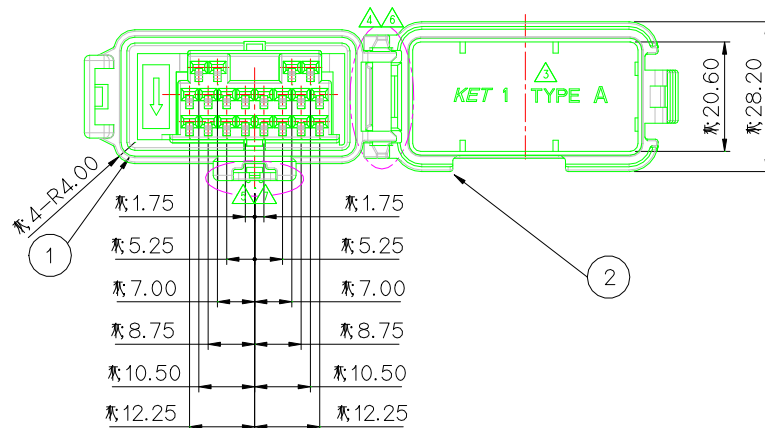

HOUSING/COVER 조립상태

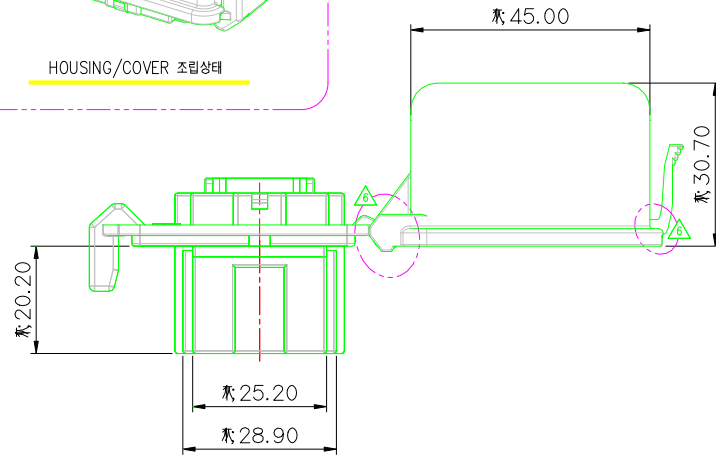

△ GENERAL TOLERANCE (HOUSING)

USED ON


10MAX	30MAX	50MAX	70MAX	100MAX	125MAX	250MAX	250VR	ANGLE	ECCENT	
±0.15	±0.2	±0.3	±0.4	±0.5	±0.75	±0.9	±1.4	±30'	0.1	

주 기



- 기능상 유해한 BURR 및 WELDLINE 등이 없을 것.
- 적용 WIRE COVER : MG635658-5
적용 TERMINAL : ST730497,498
적용 REAR HOLDER : MG630414-7
- 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NOTE

- MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE WIRE COVER : MG635658-5
APPLICABLE TERMINAL : ST730497, 498
APPLICABLE REAR HOLDER : MG630414-7
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

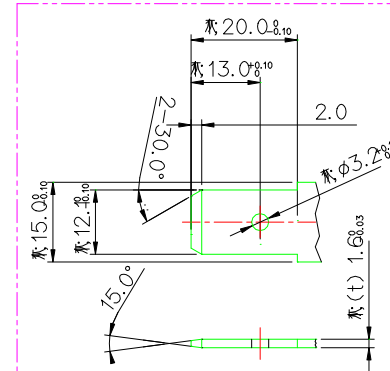

BRACKET 사양

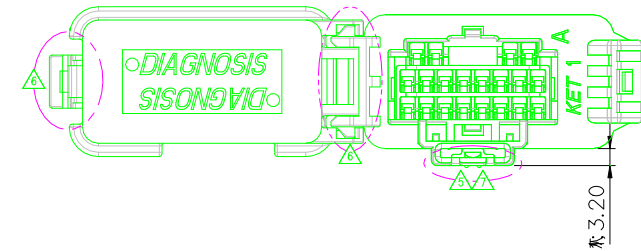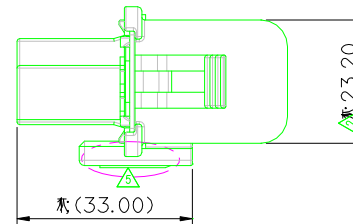

NO.	PART NO.	PART NAME	MATERIAL	COLOR
①	MG675996-5	DIAGNOSIS 20F HOUSING (BRACKET TYPE A)	PA66	BLACK
②	MG675997-5	DIAGNOSIS 20F COVER (TYPE A)	PA66	BLACK

APPROVED

2015-06-25

KOREA ELECTRIC
TERMINAL CO., LTD.
Connector Development Team 2

ISSUE MARK

△	ECO-1506-018	근거 도면 변경	CKY	-	-	CWK	'15.06.01
△	ECO-1502-024	근거 도면 변경	CKY	-	-	CWK	'15.02.02
△	ECO-1408-131	근거 도면 변경	CKY	-	-	CWK	'14.08.25
△	ECO-1407-057	근거 도면 제작성	CKY	-	-	LSJ	'14.07.09
△	ECO-1406-076	근거 도면 변경	CKY	-	-	LSJ	'14.06.10
△	ECO-1312-034	근거 도면 제작성	CKY	-	WSW	CWK	'13.12.03
△	ECO-1309-139	근거 도면 제작성	HSR	-	CKY	CWK	'13.10.08
△	ECO-1307-127	근거 도면 제작성	HSR	-	HEM	CWK	'13.07.11
LTR	REVISION RECORD		DR.	CHK.	CHK.	APP.	DATE
DR.	CKY '13.06.05		CHK.	E.M.HWANG			
CHK.			APP.	W.K.CHOI			

MATERIAL	SEE TABLE		KOREA ELECTRIC TERMINAL CO., LTD.
FINISH	SEE TABLE		
WIRE RANGE		CLASS	
INSULATION		TYPE	
TOLERANCE EXCEPT AS NOTED	SEE TABLE	SCALE 1/1	PART NO. MG655737
PART NAME DIAGNOSIS 20F ASSY (BRACKET TYPE A)			