


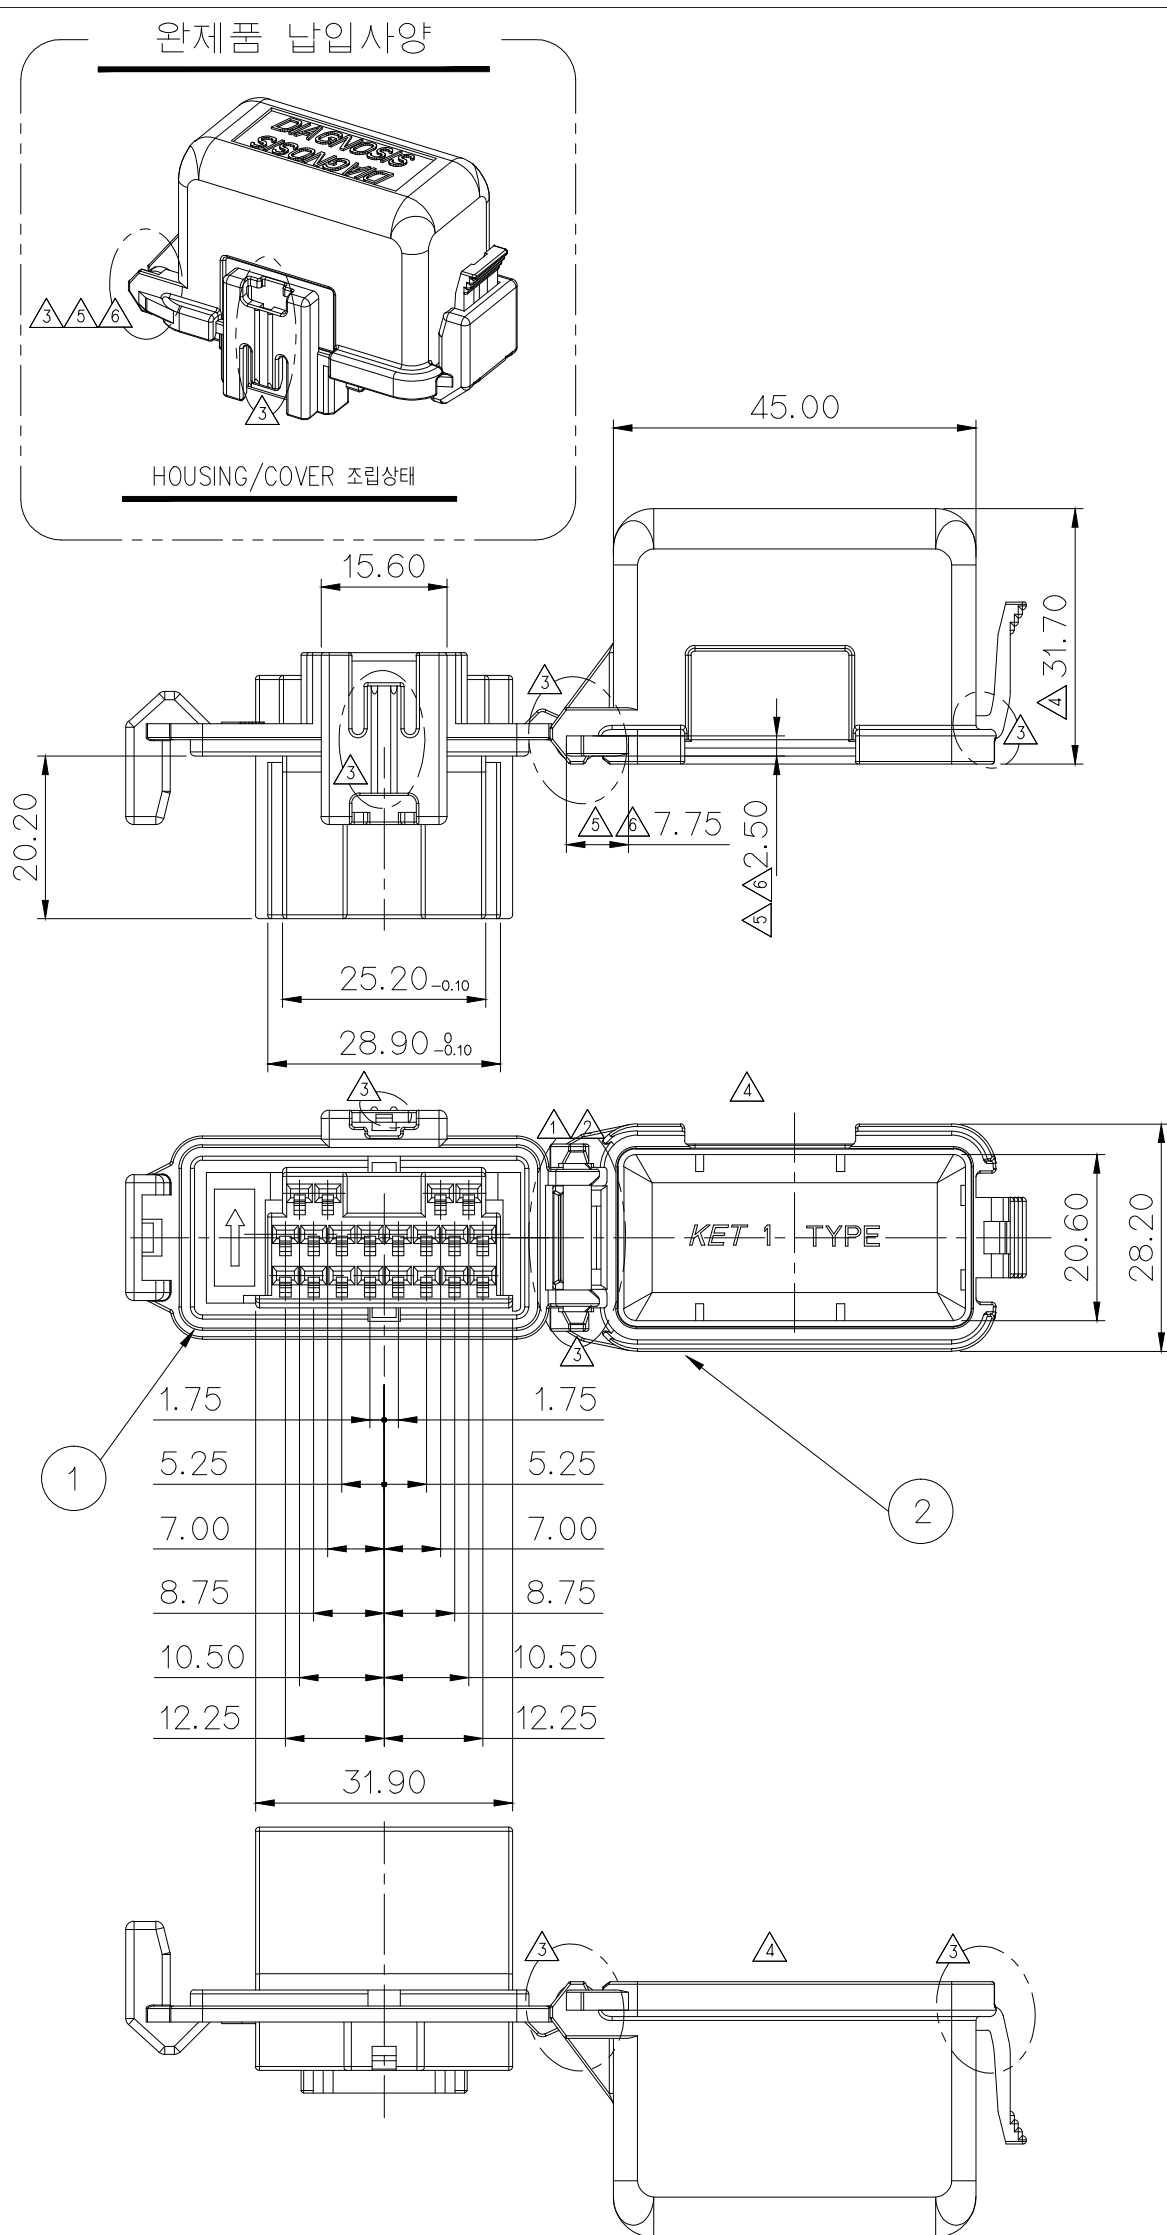




GENERAL TOLERANCE (HOUSING)										USED ON
10MAX	30MAX	50MAX	70MAX	100MAX	125MAX	250MAX	250VR	ANGLE	ECCENT	
±0.15	±0.2	±0.3	±0.4	±0.5	±0.75	±0.9	±1.4	±30'	0.1	

주 기

1. 기능상 유해한 BURR 및 WELDLINE등이 없을 것.
-
2. 적용 WIRE COVER : MG635658-5
적용 TERMINAL : ST730497,498
적용 REAR HOLDER : MG630414-7
-
- 3.제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬,
PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서
지정한 최대 허용 농도를 초과해서는 안된다.

NOTE

1. MUST BE FREE OF BURR, WELDLINE
AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE WIRE COVER : MG635658-5
APPLICABLE TERMINAL : ST730497, 498
APPLICABLE REAR HOLDER : MG630414-7
3. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY,
CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL
NOT EXCEED THE MAXIMUM PERMISSIBLE
CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE
& RoHS REGULATION.

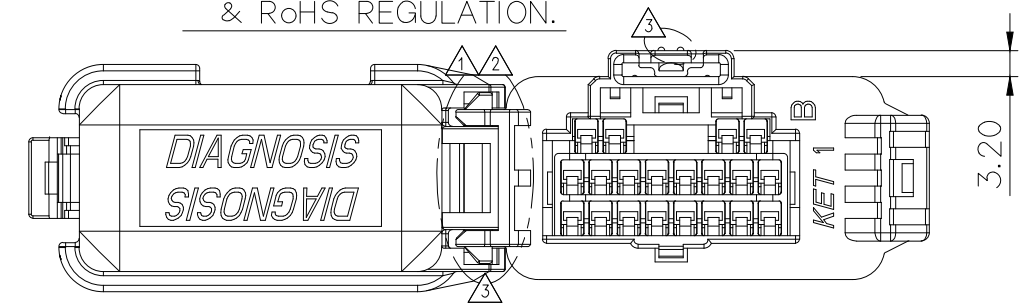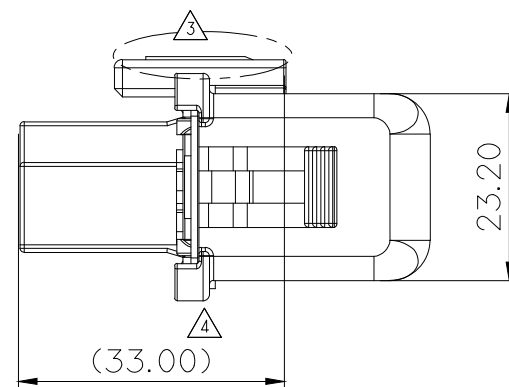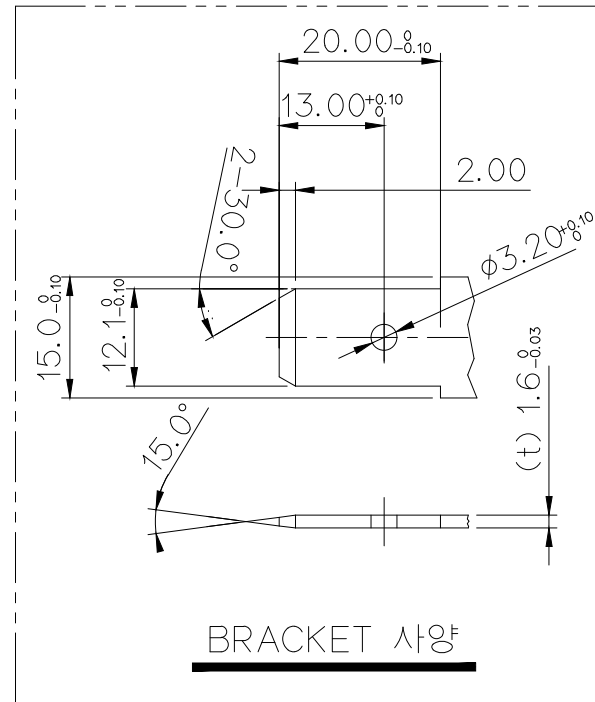

NO.	PART NO.	PART NAME	MATERIAL	COLOR
1	MG676031-5	DIAGNOSIS 20F HOUSING (BRACKET TYPE B)	PA66	BLACK
2	MG676032-5	DIAGNOSIS 20F COVER (TYPE B)	PA66	BLACK

APPROVED

2018-12-07

**KOREA ELECTRIC
TERMINAL CO., LTD.**
Korea Electric Te
rminal Co., LTD.

ISSUE MARK

IKIET KOREA ELECTRIC
ENGINEERED TERMINAL CO., LTD.

										ISSUE MARK	
6	ECO-1510-075 근거 도면 변경 (결합부 커버 리브 폭 및 너비 증대)		LJJ	CKY	-	LSY	'15.10.06	MATERIAL	SEE TABLE	KIET KOREA ELECTRIC ENGINEERED TERMINAL CO., LTD.	
3	ECO-1509-298 근거 도면 변경 (결합부 커버 리브 형상 추가)		LJJ	AJH	-	LSY	'15.09.22				
4	ECO-1509-143 근거 도면 변경 (격벽부 외곽 살보강)		KCS	AJH	-	LSY	'15.09.11	FINISH	SEE TABLE		
3	ECO-1408-021 근거 도면 변경		CKY	-	-	LSJ	'14.08.18	WIRE RANGE	CLASS		
2	ECO-1406-071 근거 도면 변경		CKY	-	-	LSJ	'14.06.10	INSULATION	TYPE		
1	ECO-1402-237 근거 도면 재작성		CKY	-	-	LSJ	'14.04.04				
LTR	REVISION RECORD		DR.	CHK.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE 1/1	PART NO. MG655749	
DR.		CKY '14.02.11	CHK.								
CHK.		LSJ '14.02.12	APP.		CWK '14.02.12						
DIAGNOSIS 20F ASSY (BRACKET TYPE B)											