


ISO VIEW

GENERAL TOLERANCE (HOUSING)


USED ON

10MAX	30MAX	50MAX	70MAX	100MAX	120MAX	250MAX	250VR	ANGLE	ECCENT	
±0.15	±0.2	±0.3	±0.4	±0.5	±0.75	±0.9	±1.4	±30'	0.1	





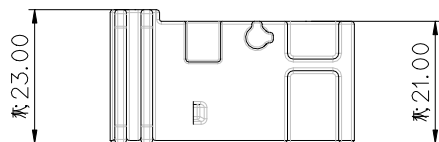


주 기

- 기능상 유해한 BURR 및 WELDLINE 등이 없을 것.
- 적용 TERMINAL(025II) : ST731374, 1375-3  
적용 TERMINAL(060) : ST731334, 1335, 1336-3  
적용 TERMINAL(110) : ST731279, 1280, 1281-3  
적용 CONNECTOR : MG645805
- 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

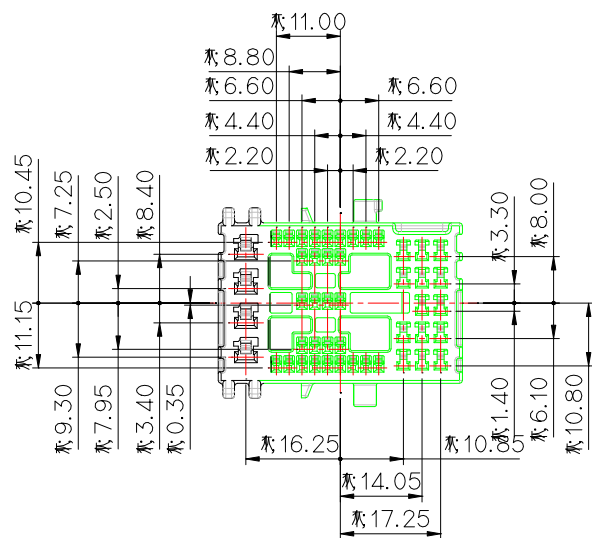

PITCH DETAIL



NOTE

- MUST BE FREE OF FLASH, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE TERMINAL(025II) : ST731374, 1375-3  
APPLICABLE TERMINAL(060) : ST731334, 1335, 1336-3  
APPLICABLE TERMINAL(110) : ST731279, 1280, 1281-3  
APPLICABLE CONNECTOR : MG645805
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

APPROVED

2015-06-25

KOREA ELECTRIC  
TERMINAL CO., LTD.  
Product Development Team 1

ISSUE MARK

NO.	PART NAME	PART NO.	MATERIAL	COLOR	QTY.
1	025060110 48F HOUSING	MG676080	PBT	NATURAL	1
2	025060110 48F SPACER	MG676081-3	PBT	YELLOW	1

MATERIAL	SEE TABLE	KOREA ELECTRIC TERMINAL CO., LTD.			
FINISH	SEE TABLE				
WIRE RANGE		CLASS HYBRID			
INSULATION		TYPE 025/060/110			
LTR	REVISION RECORD	DR. APP. DATE	TOLERANCE EXCEPT AS NOTED	SCALE 1/1	PART NO. MG655763
DR.	SON.SH 2013.11.10	CHK.	PART NAME	025060110 48F ASSY	
CHK.		APP.			