

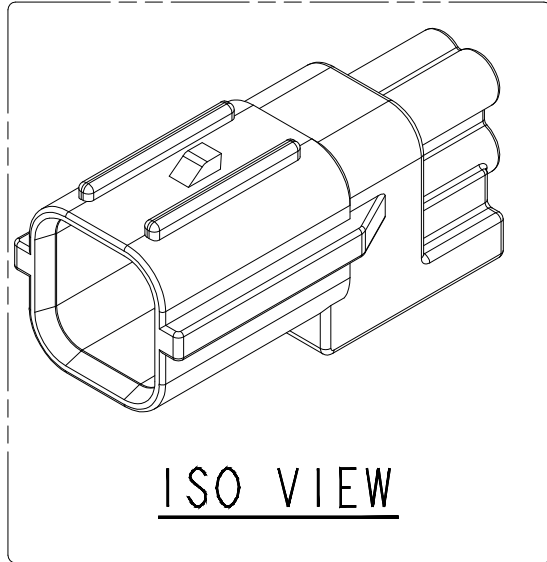
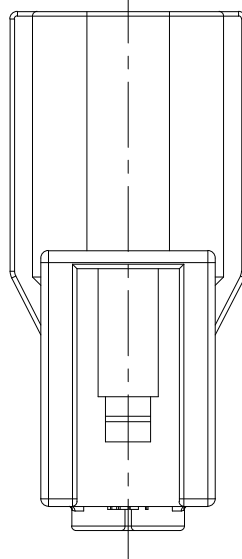


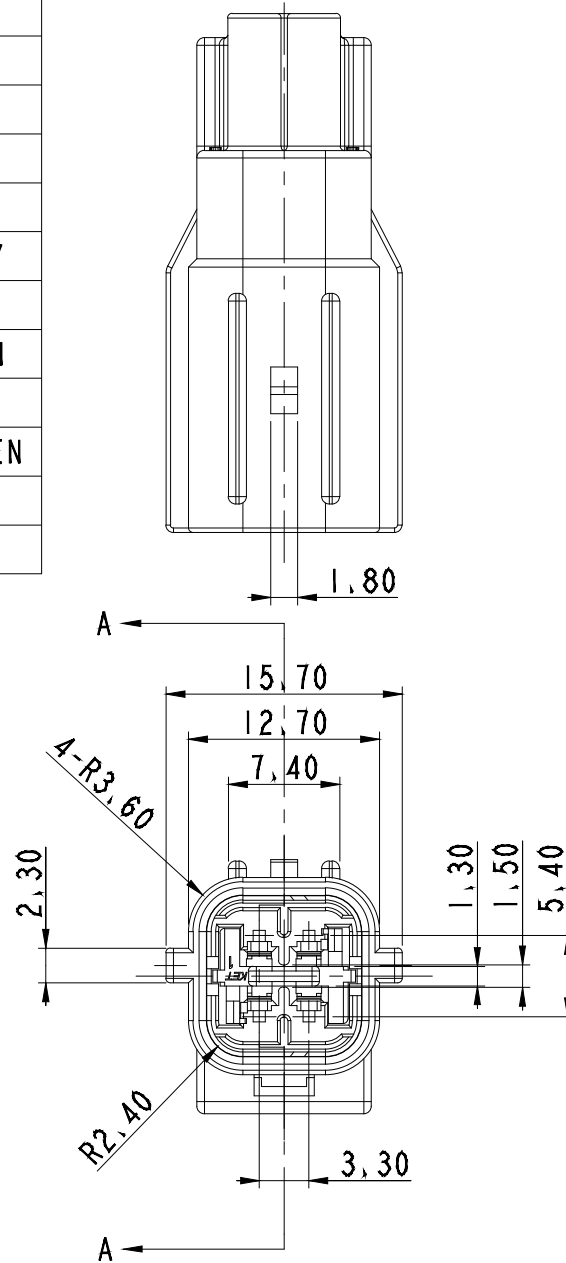

ISO VIEW

NO.	MATERIAL	COLOR
0	P B T	NATURAL
1		RED
2		BLUE
20		JADE
3		YELLOW
4		GRAY
40		DARK GRAY
41		LIGHT GRAY
5		BLACK
6		DARK GREEN
7		BROWN
8		LIGHT GREEN
9		MAGENTA
11		ORANGE

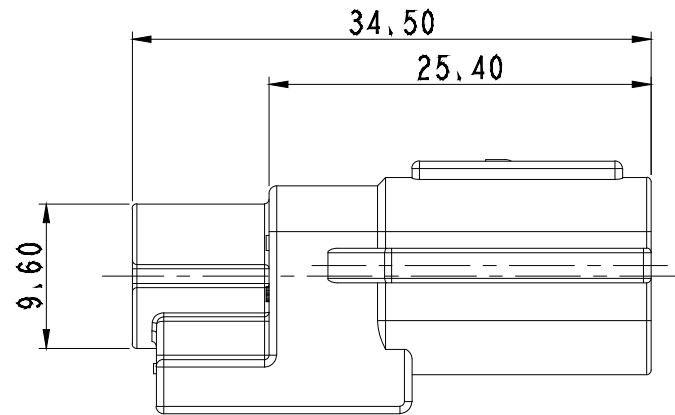


GENERAL TOLERANCE (HOUSING)										USED ON
10 MAX	30 MAX	50 MAX	70 MAX	100 MAX	120 MAX	250 MAX	250 VR	ANGLE	ECCENT	
±0.15	±0.2	±0.3	±0.4	±0.5	±0.75	±0.9	±1.4	±30'	0.1	

NO.	PART NO.	PART NAME	MATERIAL	FINISH
1	MG676268	025 WP 4M HOUSING	PBT	SEE TABLE
2	MG676269	025 WP 4M FRONT HOLDER	PBT	NATURAL

주 기

1. 지시하지 않은 반경 R은 0.3로 한다.
2. 지시하지 않은 모파기 C는 0.3으로 한다.
3. 기능상 유해한 BURR 및 WELDLINE 등이 없을 것.
4. 적용 TERMINAL : ST741337, 1338
WIRE SEAL : MG685387, 5388
CLIP : MG630418, 0559, 1467, 0922, 3061, 3713, 4647
FEMALE ASS'Y : MG645854
5. HOUSING 표면 부식 사양 : KDP-6A
6. 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

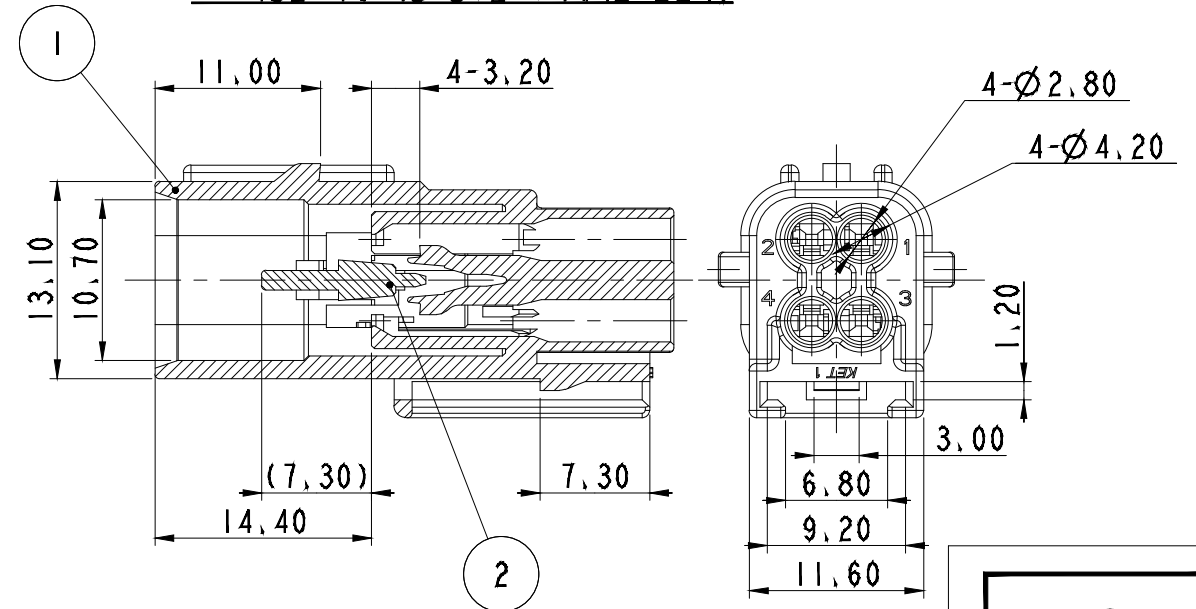

SECTION A-A

NOTE

1. UNLESS OTHERWISE SPECIFIED ALL RADIUS TO BE 0.3 RADIUS.
2. UNLESS OTHERWISE SPECIFIED ALL CHAMFERS TO BE 0.3 CHAMFER.
3. MUST BE FREE OF FLASH, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
4. APPLICABLE TERMINAL : ST741337, 1338
WIRE SEAL : MG685387, 5388
CLIP : MG630418, 0559, 1467, 0922, 3061, 3713, 4647
FEMALE ASS'Y : MG645854
5. HOUSING ETCHING SPEC : KDP-6A
6. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

APPROVED

2018-12-11

KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.

ISSUE MARK

						MATERIAL	SEE TABLE	 KOREA ELECTRIC TERMINAL CO., LTD.	
						FINISH	SEE TABLE		
						WIRE RANGE		CLASS 025 WP	
						INSULATION		TYPE	
	과사성적서 할격에 따른 도면 제작성			JCM	SSH	SUK	15.07.28		
LTR	REVISION RECORD			DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	
DR.		WDH 2014.06.18		CHK.		SCALE 2/1			PART NO. MG655806
CHK.		KMH 2014.06.18		APP.		LSY 2014.06.18			PART_NAME 025 WP 4M ASSY