

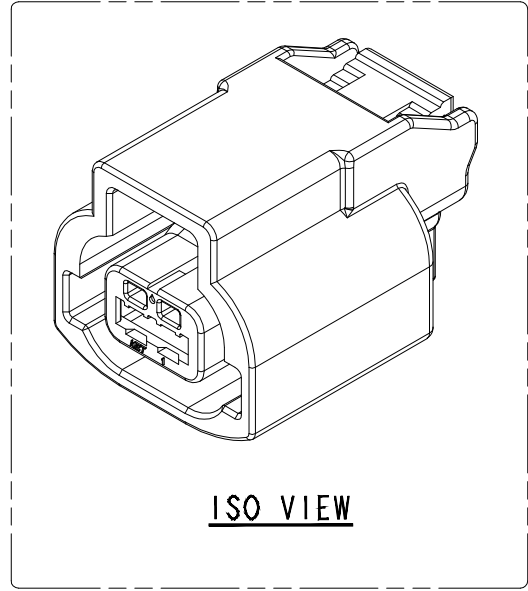
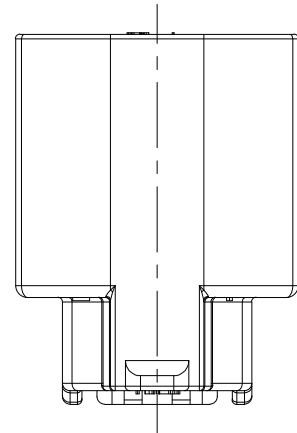
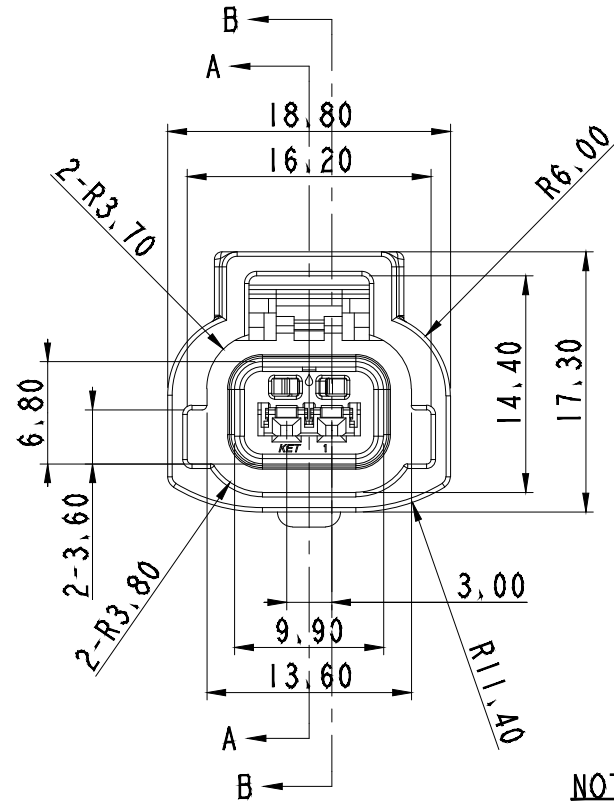


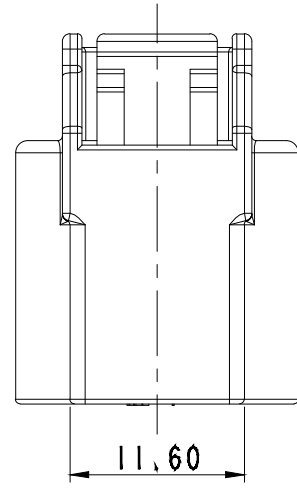


ISO VIEW

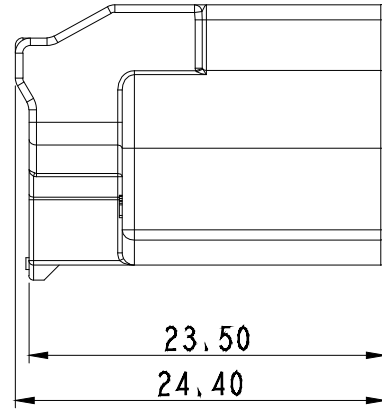


GENERAL TOLERANCE (HOUSING)

10 MAX	30 MAX	50 MAX	70 MAX	100 MAX	120 MAX	250 MAX	250 VR	ANGLE	ECCENT	USED ON
±0.15	±0.2	±0.3	±0.4	±0.5	±0.75	±0.9	±1.4	±30'	0.1	

NO	PART NO.	PART NAME	MATERIAL	FINISH
1	MG676362	025 WP 2F HOUSING	PBT	BLACK
2	MG674110	025 WP 2F FRONT HOLDER	PBT	NATURAL
3	R602157	025 WP 2F INNER SEAL	SILICONE	RED

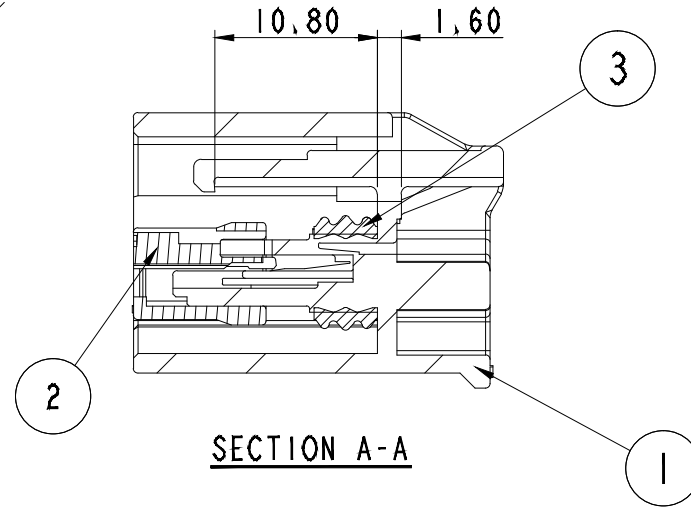

SECTION A-A

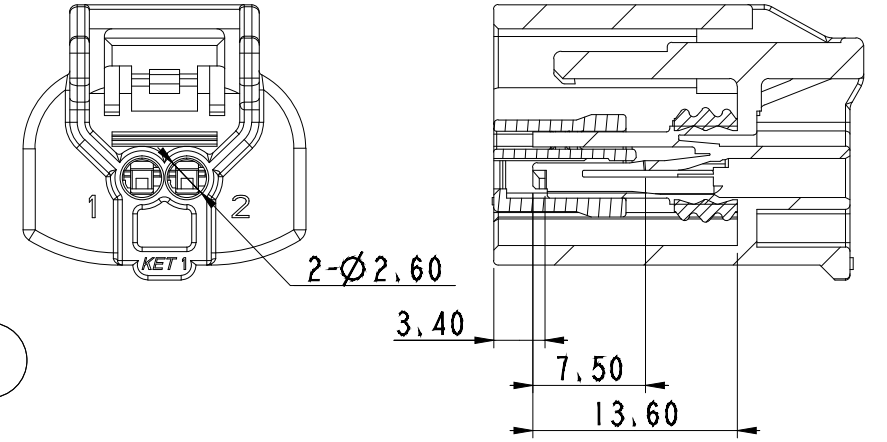

SECTION B-B

NOTE

1. MUST BE FREE OF FLASH, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
2. FRONT HOLDER IS SUPPORT WITH THE 1st LOCK CONDITION.
3. APPLICABLE TERMINAL : ST730962-3, ST730963-3
4. APPLICABLE WIRE SEAL : MG683292, MG683293
5. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

조기

1. 기능상 유해한 BURR 및 WELDLINE 등이 없을 것.
2. F/HOLDER는 1차 LOCK 상태로 유지, 공급할 것.
3. 적용 TERMINAL : ST730962-3, ST730963-3
4. 적용 WIRE SEAL : MG683292, MG683293
5. 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

(DIMENSIONS IN MM)

APPROVED

2016-03-11

KOREA ELECTRIC
TERMINAL CO., LTD.
Connector Development Team 1

ISSUE MARK

					MATERIAL	SEE TABLE		
					FINISH	SEE TABLE		
					WIRE RANGE		CLASS	025 WP(RH)
					INSULATION		TYPE	
△	검사 성적서 합격에 따른 도면 제작성	LJW	HYJ	LSY	15.05.27			
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE	PART NO.
DR.	LJW 2014.11.27	CHK.	WDH	2014.12.04		SEE TABLE	2/1	MG656776
CHK.	KMH 2014.12.04	APP.	LSY	2014.12.04		PART_NAME	025 WP(RH) 2F ASSY	

KIET KOREA ELECTRIC
ENGINEERED TERMINAL CO., LTD.