


GENERAL TOLERANCE (HOUSING)										USED ON
10 MAX	30 MAX	50 MAX	70 MAX	100 MAX	120 MAX	250 MAX	250 VR	ANGLE	ECCENT	
±0.15	±0.2	±0.3	±0.4	±0.5	±0.75	±0.9	±1.4	±30'	0.1	

주 기

- 기능상 유해한 BURR 및 WELDLINE 등이 없을 것.
- 적용 TERMINAL (02511) : ST731374, 1375-3
적용 TERMINAL (060) : ST731334, 1335, 1336-3
적용 TERMINAL (110) : ST731279, 1280, 1281-3
적용 CONNECTOR : MG645915
- 제품내 함유된 6대 유해물질(납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

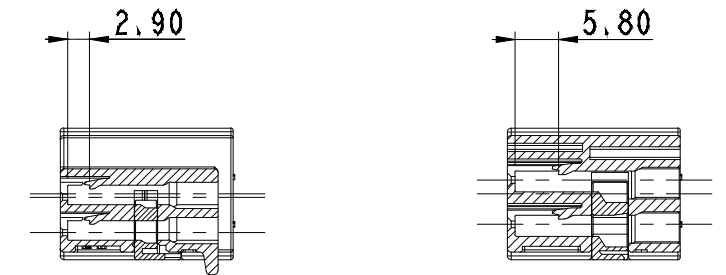

SECTION B-B(060) SECTION C-C(110)

NOTE

- MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE TERMINAL(02511) : ST731374, 1375-3
APPLICABLE TERMINAL(060) : ST731334, 1335, 1336-3
APPLICABLE TERMINAL(110) : ST731279, 1280, 1281-3
APPLICABLE CONNECTOR : MG645915
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PPDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

APPROVED

2019-11-06

KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.

ISSUE MARK

NO	PART NAME	PART NO.	MATERIAL	COLOR	QTY.
1	025060110 22F HOUSING	MG676414	PBT	NATURAL	1
2	025060110 22F SPACER	MG676399-3	PBT	YELLOW	1

ECO-1707-279 근거 도면 제작성	KJS	KMH	CJH	17/07/18	MATERIAL	SEE TABLE	KIET ENGINEERED	KOREA ELECTRIC TERMINAL CO., LTD.	
ECO-1702-339 근거 도면 제작성	LND	KMH	LSY	17/02/22	FINISH	SEE TABLE			
ECO-1610-465 근거 도면 제작성	LND	KMH	LSY	16/10/28	WIRE RANGE		CLASS	HYBRID	
ECO-1510-371 근거 도면 제작성	JJH	LJF	BIN	15/10/23	INSULATION		TYPE	025/060/110	
ECO-1505-180 근거 도면 제작성	JJH	LJE	BIN	15/05/18					
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE	PART NO.
DR.	JJH	2015.03.04	CHK.	AJH	2015.03.04		SEE TABLE	1/1	MG656784
CHK.	KMH	2015.03.04	APP.	LSY	2015.03.04		PART_NAME		025060110 22F ASSY