

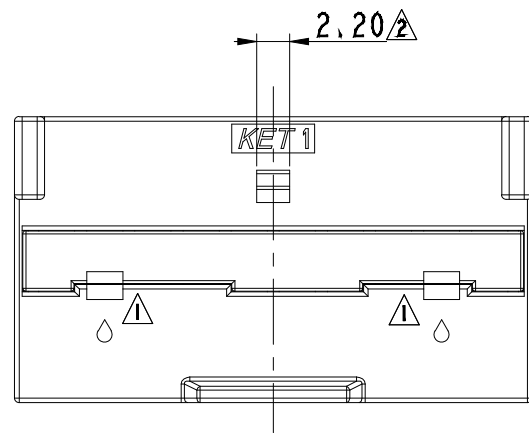
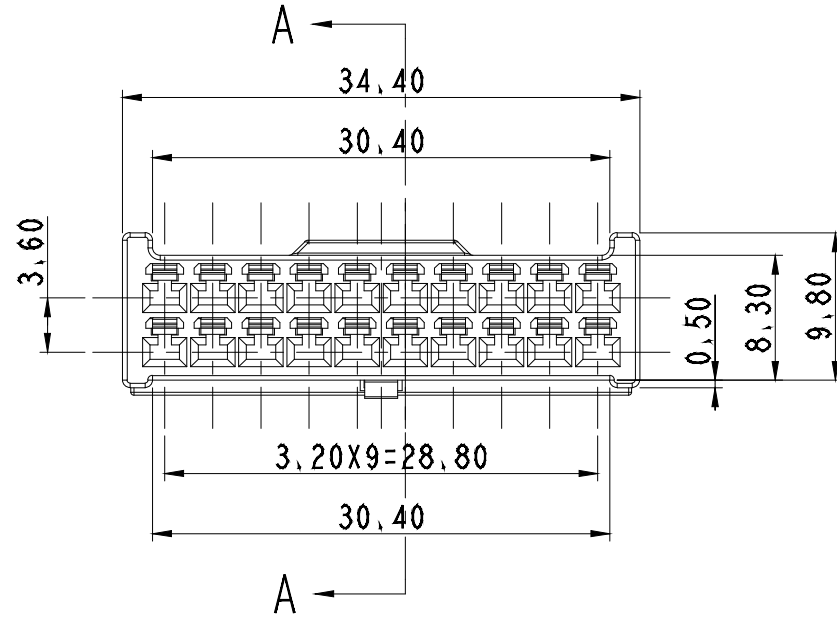




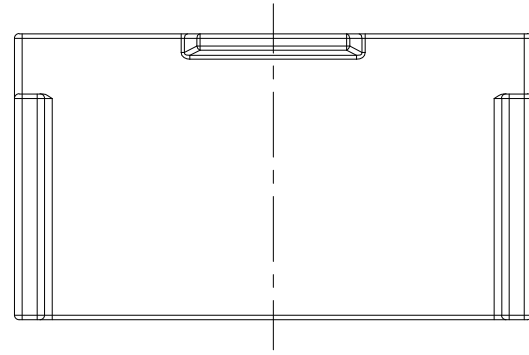


GENERAL TOLERANCE (HOUSING)

10 MAX	30MAX	50 MAX	70MAX	100 MAX	125MAX	250 MAX	250 VR	ANGLE	ECCENT	USED ON
±0.15	±0.2	±0.3	±0.4	±0.5	±0.75	±0.9	±1.4	±30°	0.1	

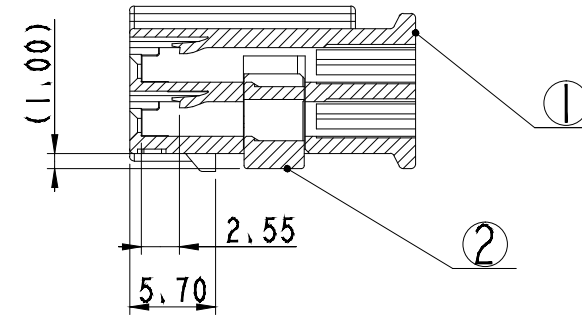

SECTION A-A

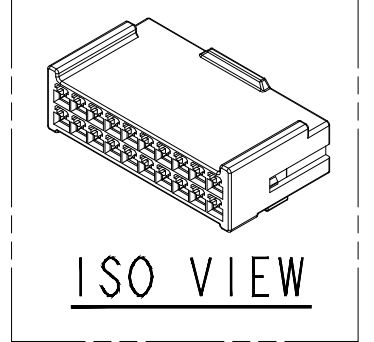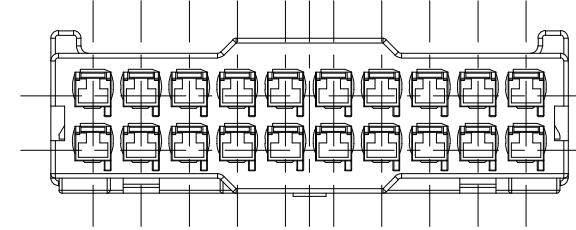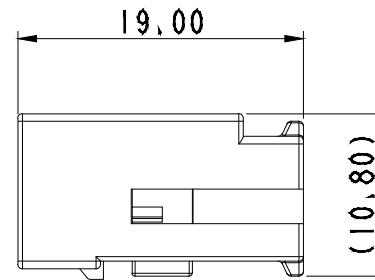

ISO VIEW

NO.	MATERIAL	COLOR
* 0	P B T	NATURAL
1		RED
2		BLUE
20		JADE
3		YELLOW
4		GRAY
40		DARK GRAY
41		LIGHT GRAY
5		BLACK
6		DARK GREEN
7		BROWN
8		LIGHT GREEN
9		MAGENTA
11		ORANGE

주 기

- 기능상 유해한 BURR 및 WELDLINE 등이 없을 것,
- 적용 TERMINAL (C060) : ST731411, 1412, 1413
- 적용 CONNECTOR : MG645948, MG645949-2, MG645945-5, MG645952-3
- 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다,

NOTE

- MUST BE FREE OF FLASH, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE TERMINAL (C060) : ST731411, 1412, 1413
- MATCHING CONNECTOR : MG645948, MG645949-2, MG645945-5, MG645952-3
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

NO.	PART NAME	PART NO.	MATERIAL	COLOR	Q'TY
1	C060 20F HOUSING	MG676507	SEE TABLE	SEE TABLE	1
2	C060 20F SPACER	MG676508	PBT	YELLOW	1

					MATERIAL	SEE TABLE	KOREA ELECTRIC TERMINAL CO., LTD.
					FINISH	SEE TABLE	
					WIRE RANGE		CLASS
					INSULATION		TYPE C060
					TOLERANCE EXCEPT AS NOTED	SEE TABLE	SCALE 2/1
					PART_NAME	C060 20F JOINT ASSY	

APPROVED

2019-11-05

KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.

ISSUE MARK