


ISO VIEW


NO.	MATERIAL	COLOR
0	P B T	NATURAL
1		RED
2		BLUE
20		JADE
3		YELLOW
4		GRAY
40		DARK GRAY
41		LIGHT GRAY
* 5		BLACK
6		DARK GREEN
7		BROWN
8		LIGHT GREEN
9		MAGENTA
11		ORANGE

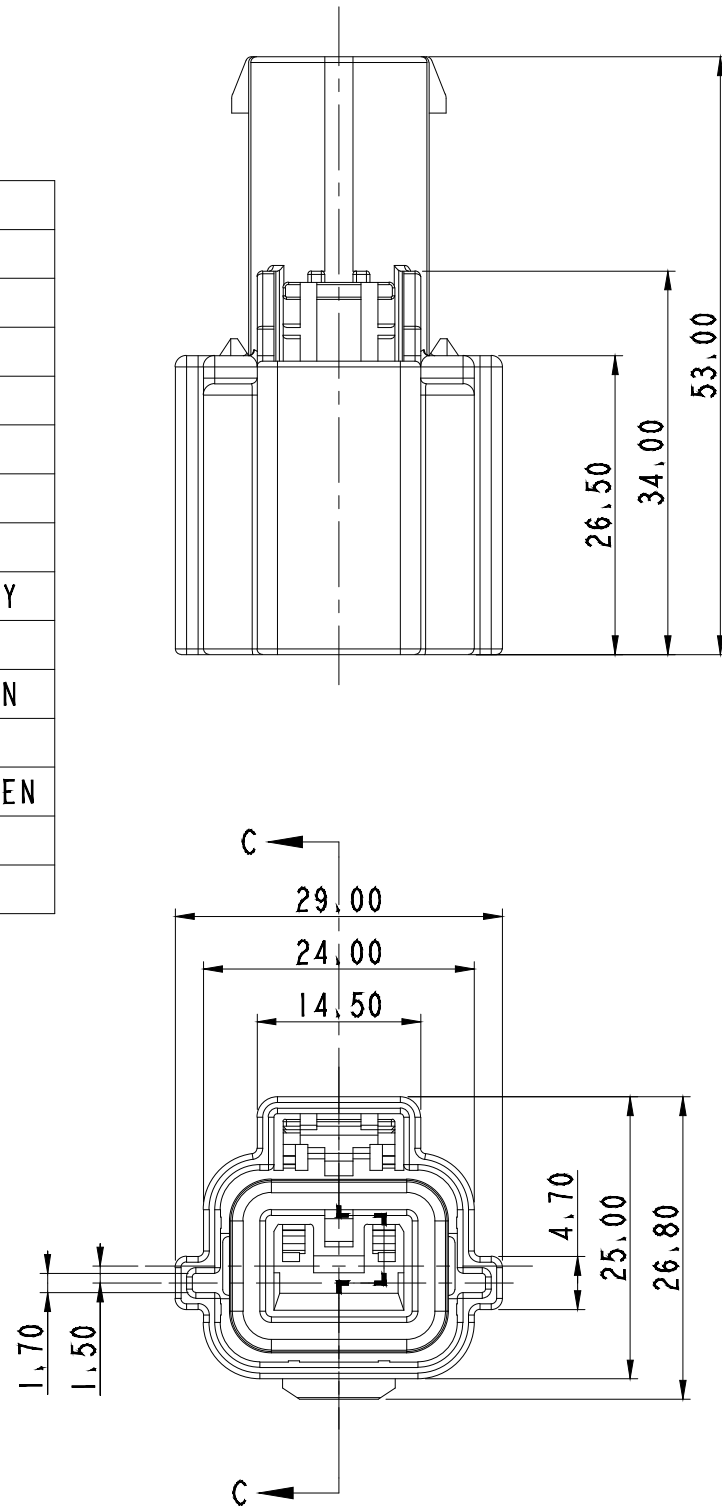

GENERAL TOLERANCE (HOUSING)										USED ON
10 MAX	30 MAX	50 MAX	70 MAX	100 MAX	120 MAX	250 MAX	250 VR	ANGLE	ECCENT	
±0.15	±0.2	±0.3	±0.4	±0.5	±0.75	±0.9	±1.4	±30'	0.1	



NOTE

1. UNLESS OTHERWISE SPECIFIED ALL RADIUS TO BE 0.3 RADIUS,
2. UNLESS OTHERWISE SPECIFIED ALL CHAMFERS TO BE 0.3 CHAMFER,
3. MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION,
4. APPLICABLE TERMINAL(375) ; ST731392-S
WIRE SEAL(375) ; MG685442(10SQ),
MG685429(15SQ)
REAR HOLDER ; MG635763
CONNECTOR ; MG625460
5. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION,

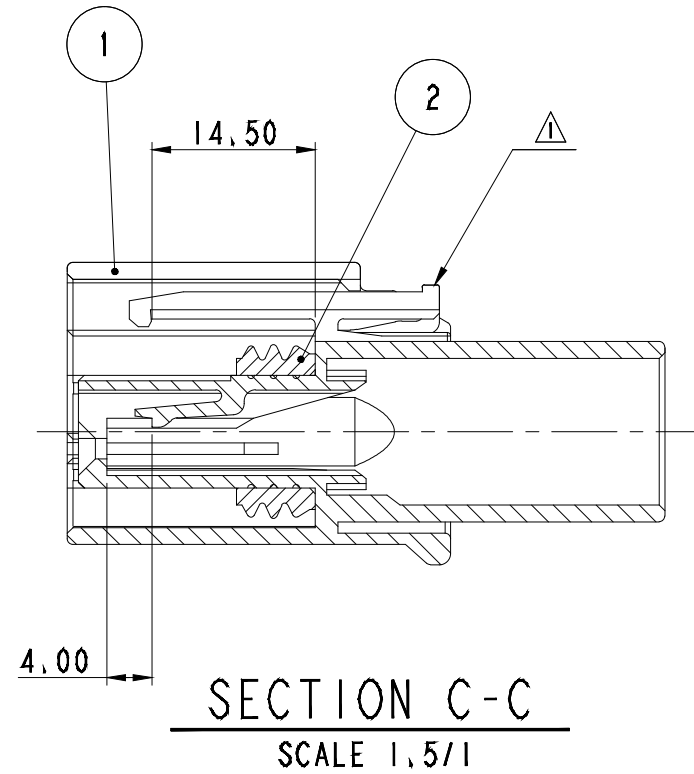

주 기

1. 지시하지 않은 반경 R은 0.3으로 한다,
2. 지시하지 않은 모따기 C는 0.3으로 한다,
3. 기능상 유해한 BURR 및 WELDLINE 등이 없을 것,
4. 적용 TERMINAL(375) ; ST731392-S
WIRE SEAL(375) ; MG685442(10SQ),
MG685429(15SQ)
REAR HOLDER ; MG635763
CONNECTOR ; MG625460
5. 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다,

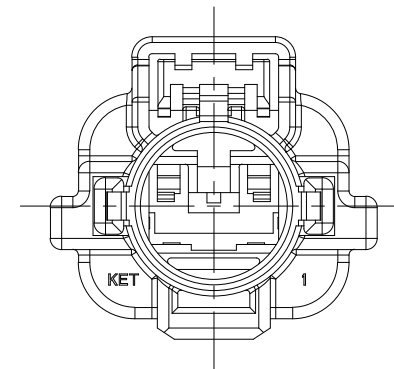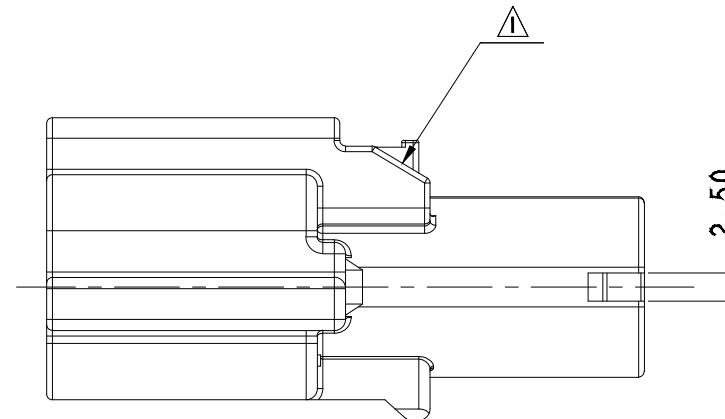

APPROVED

2019-11-06

KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.

ISSUE MARK

NO	PART NO.	PART NAME	MATERIAL	FINISH	Q'TY	REMARK
1	MG676555	375 WP IF HOUSING	PBT	BLACK	1	-
2	R603408	375 WP IF INNER SEAL	SILICONE	RED	1	-

				MATERIAL	SEE TABLE	KIET ENGINEERED	KOREA ELECTRIC TERMINAL CO., LTD.
				FINISH	SEE TABLE		
				WIRE RANGE	-	CLASS	-
				INSULATION	-	TYPE	375 WP
				TOLERANCE EXCEPT AS NOTED	SEE TABLE	SCALE	1.5/1
				PART_NAME	375 WP IF ASSY		

ECO-1907-444 근거 도면 제작성	HYJ	CJH	19.07.30
LTR	DR.	CHK.	APP.
DR.	SYLEE 2015.10.13	CHK.	KMH 2015.10.13
CHK.		APP.	BIN 2015.10.13