

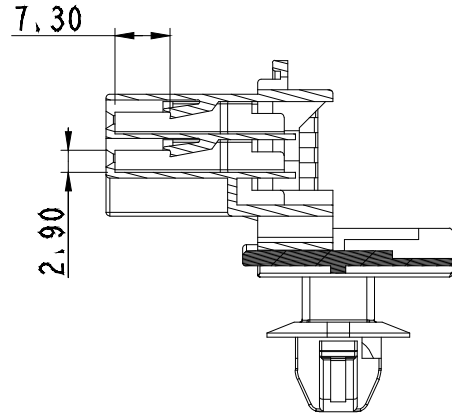
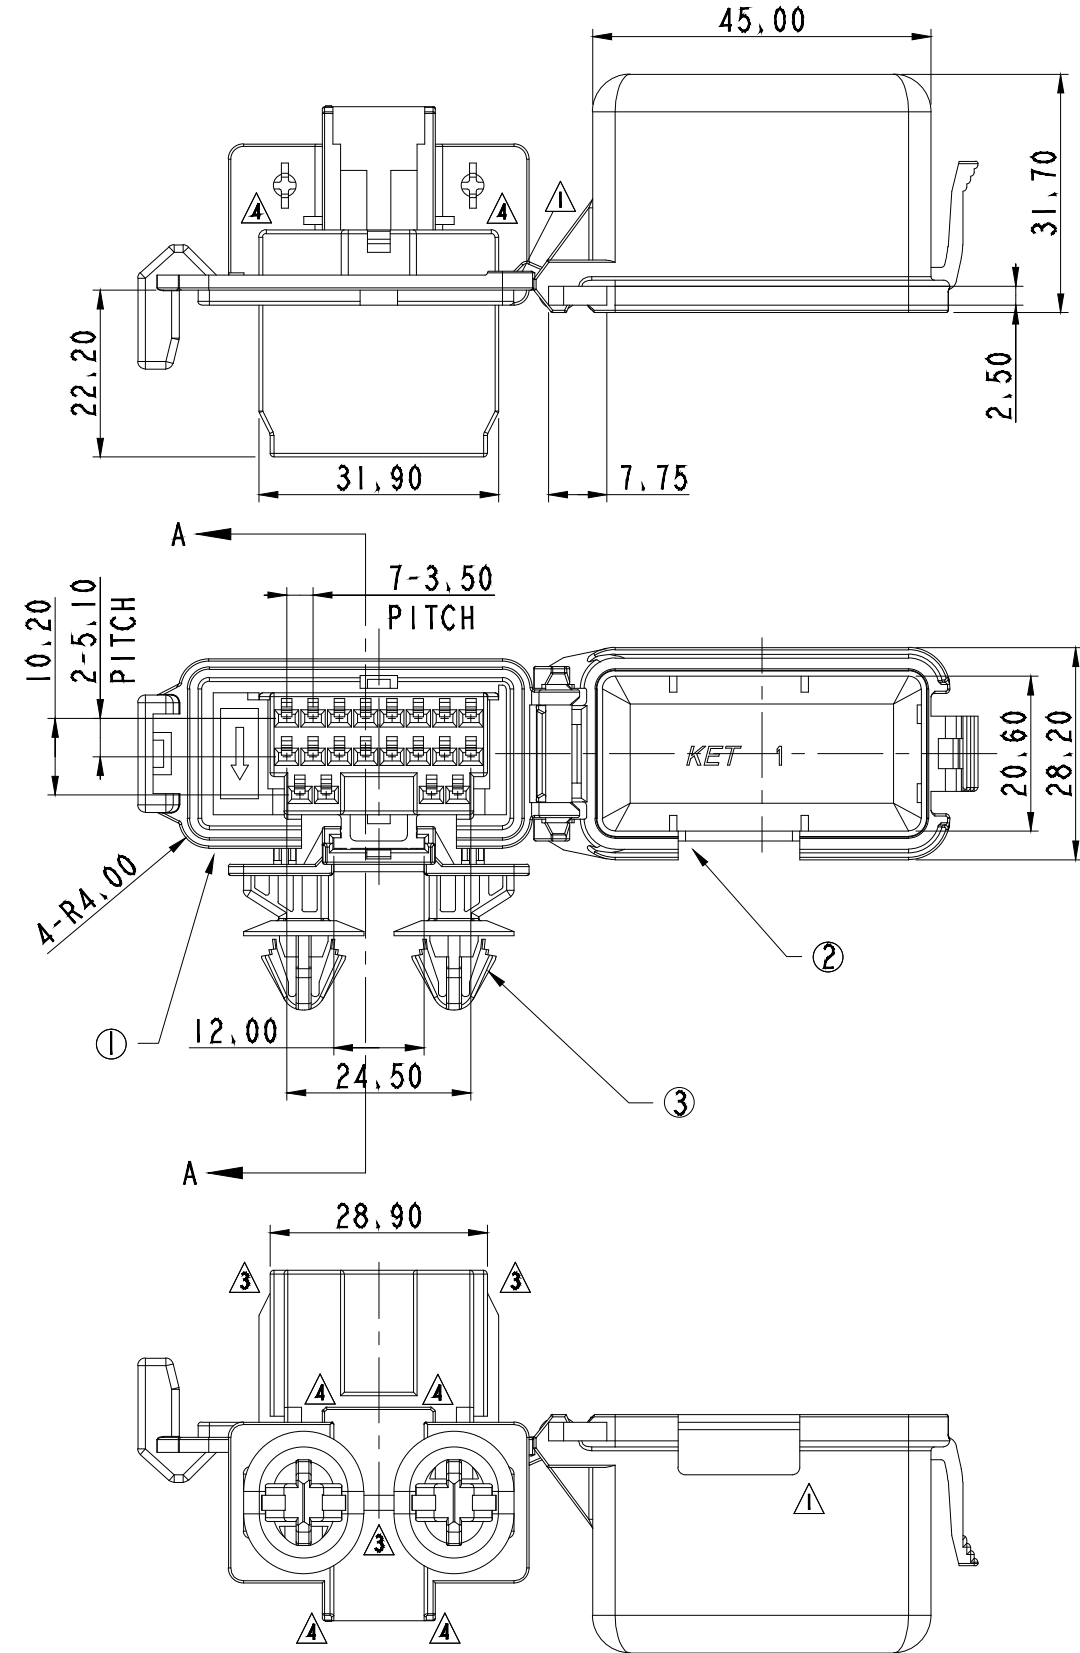

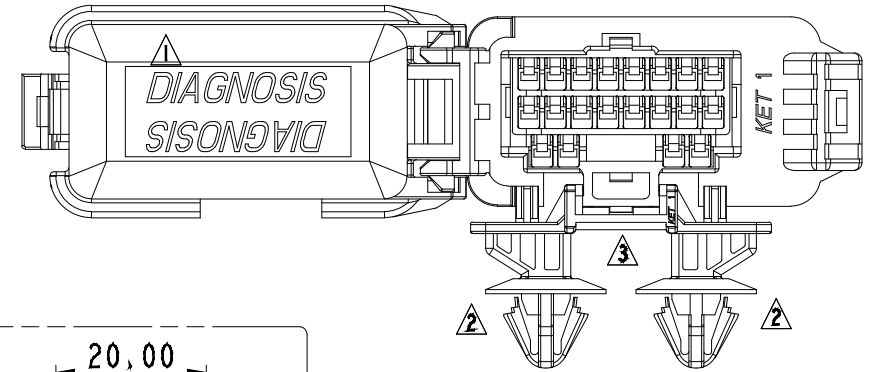


NO.	PART NO.	PART NAME	MATERIAL	COLOR
①	MG676613	DIAGNOSIS 20F HOUSING (DOUBLE CLIP_D)	PBT	BLACK
②	MG676614	DIAGNOSIS 20F COVER (DOUBLE CLIP_D)	PBT	BLACK
③	MG635872	DIAGNOSIS DOUBLE CLIP	NYLON	BLACK

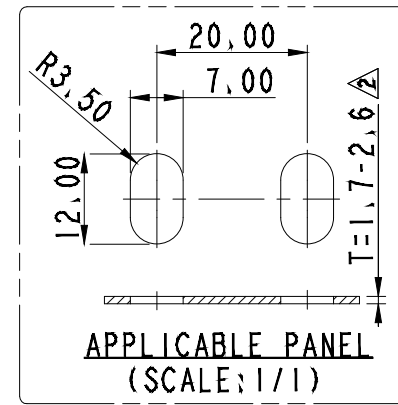

SECTION A-A

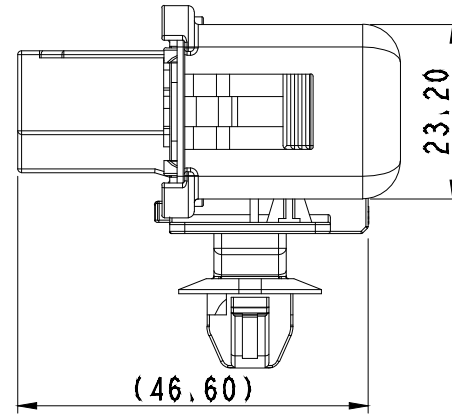

ISO VIEW
SCALE 1/2

GENERAL TOLERANCE (HOUSING)							USED ON
10 MAX	50 MAX	100 MAX	250 MAX	250 VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

주요

- 기능상 유해한 BURR 및 WELDLINE 등이 없을 것,
- 적용 WIRE COVER ; MG635658-5
적용 TERMINAL ; ST730497, 498
적용 REAR HOLDER ; MG630414-7
- 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다,

NOTE

- MUST BE FREE OF FLASH, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE WIRE COVER ; MG635658-5
APPLICABLE TERMINAL ; ST730497, 498
APPLICABLE REAR HOLDER ; MG630414-7
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

ISSUE MARK

					MATERIAL	SEE TABLE	 KOREA ELECTRIC TERMINAL CO., LTD. 2018-11-30	APPROVED CO., LTD. KOREA ELECTRIC TERMINAL CO., LTD. 2018-11-30			
4	ECO-1811-301 근거 도면 제작성	AYT	AJH	CMS	18.11.20	FINISH			SEE TABLE		
3	ECO-1807-116 근거 도면 제작성	AYT	AJH	CMS	18.07.09	WIRE RANGE			-	CLASS	SEE NOTE
2	ECO-1803-243 근거 도면 제작성	AYT	AJH	CMS	18.03.16	INSULATION			-	TYPE	SDL
1	ECO-1606-200 근거 도면 제작성	LCK	CKI	BIN	16.06.16	TOLERANCE EXCEPT AS NOTED	SEE TABLE	SCALE 1/1	PART NO.	MG656853	
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	PART_NAME				
DR.		LCK '16.01.25		CHK.		SYLEE '16.01.25		DIAGNOSIS 20F ASSY (D/CLIP_D)			
CHK.		KMH '16.01.25		APP.		BIN '16.01.25					