

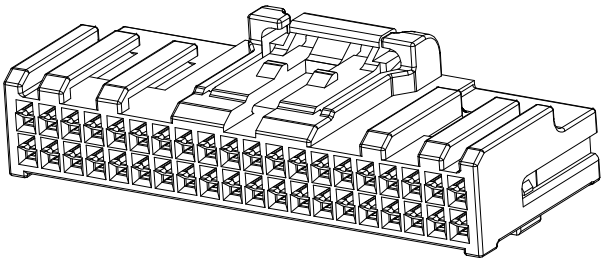
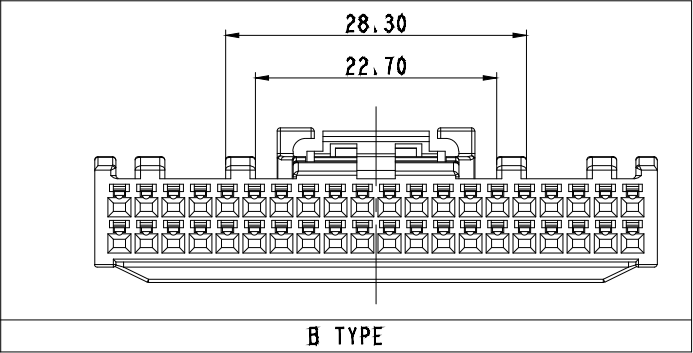
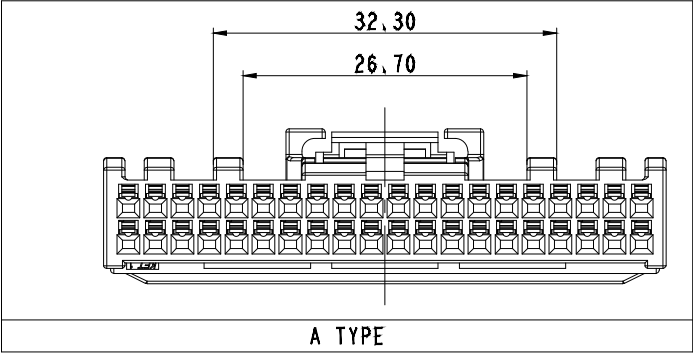
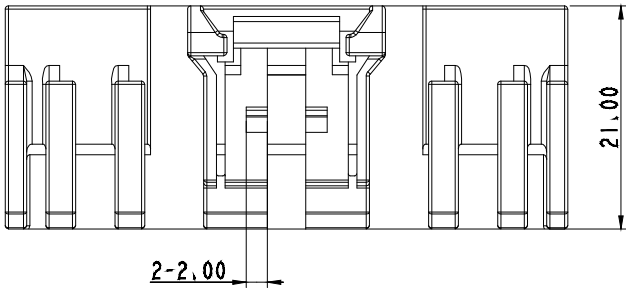




GENERAL TOLERANCE (HOUSING)										USED ON
10 MAX	30 MAX	50 MAX	70 MAX	100 MAX	120 MAX	250 MAX	250 VR	ANGLE	ECCENT	
±0.15	±0.2	±0.3	±0.4	±0.5	±0.75	±0.9	±1.4	±30'	0.1	



ISO VIEW

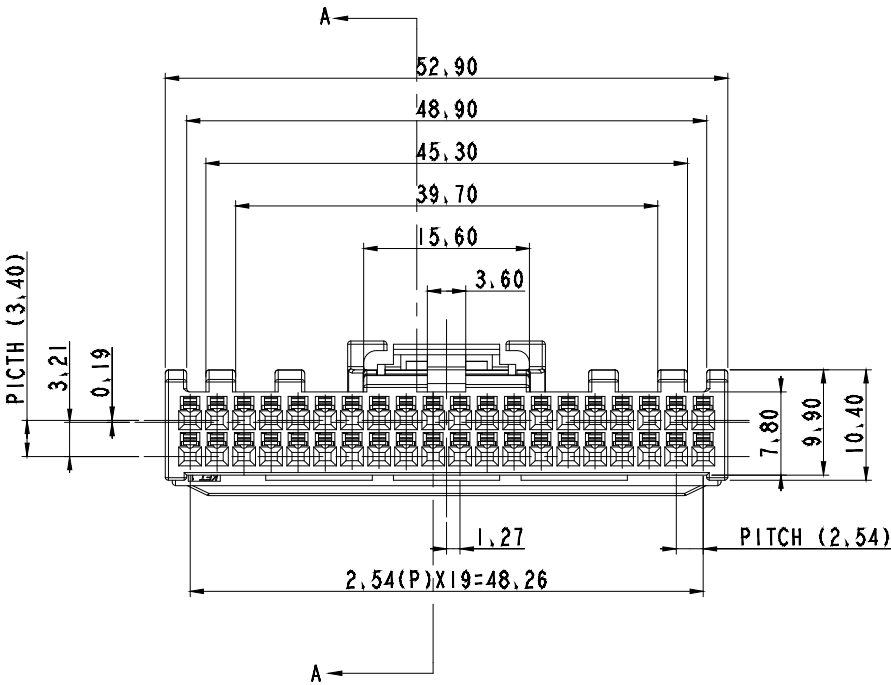

SECTION A-A

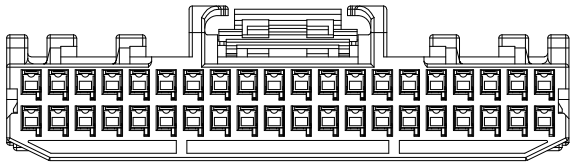

NO.	MATERIAL	COLOR
0	P B T	NATURAL
1		RED
2		BLUE
20		JADE
3		YELLOW
4		GRAY
40		DARK GRAY
41		LIGHT GRAY
5		BLACK
6		DARK GREEN
7		BROWN
8		LIGHT GREEN
9		MAGENTA
1		ORANGE


APPROVED

2019-11-06

KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
UNDAE CO., LTD.

NOTE
1. MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE TERMINAL C025 : ST731409-3/G ST731410-3/G
3. THE MOLD DRAWING IN THE SAME WAY, SPACER IS NORMAL CONDITION MAINTANANCE AND SUPPLY WITH FIRST LOCK NG.
4. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED IN ROHS REGULATION.

주 기
1. 기능상 유해한 BURR 및 WELDLINE 등이 없을 것,
2. 적용 TERMINAL C025 : ST731409-3/G ST731410-3/G
3. SPACER는 본 도면과 같이 1차 LOCK'G 상태로 유지,공급될 것
4. 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

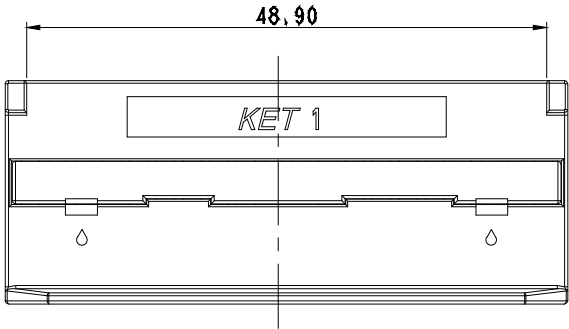

No.	ASSY NAME	ASSY No.	PART	PART NAME	PART No.	MATERIAL	COLOR
1	C025 40F ASSY_A TYPE	MG656872	①	C025 40F HSG(A TYPE)	MG676681	PBT	NATURAL
			③	C025 40F SPACER	MG676680-41	PBT	L/GRAY
2	C025 40F ASSY_B TYPE	MG656873-5	②	C025 40F HSG(B TYPE)	MG676682-5	PBT	BLACK
			③	C025 40F SPACER	MG676680-41	PBT	L/GRAY

					MATERIAL	SEE TABLE	 KOREA ELECTRIC TERMINAL CO., LTD.	
					FINISH	SEE TABLE		
					WIRE RANGE	-		
					INSULATION	-		
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	CLASS	C025
DR.	LNS 2016.05.20		CHK.	LJE 2016.05.23			TYPE	비방수
CHK.			APP.	BIN 2016.05.23			PART NO.	SEE TABLE
							PART-NAME	C025 40F ASSY (A/B-CODE)