
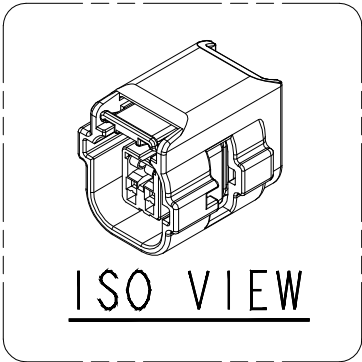
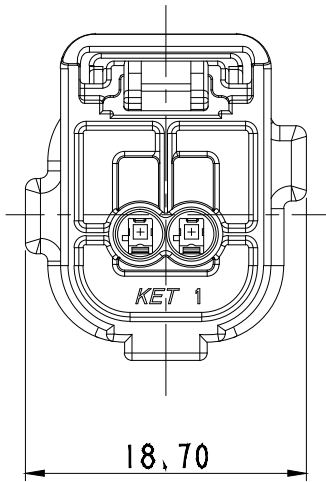
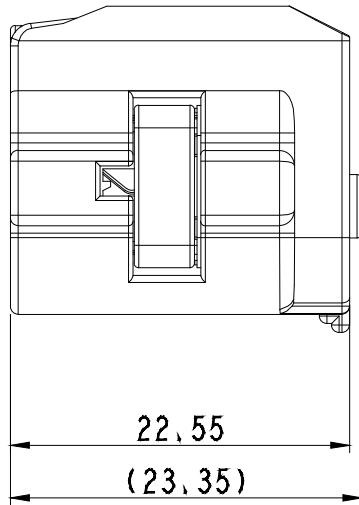
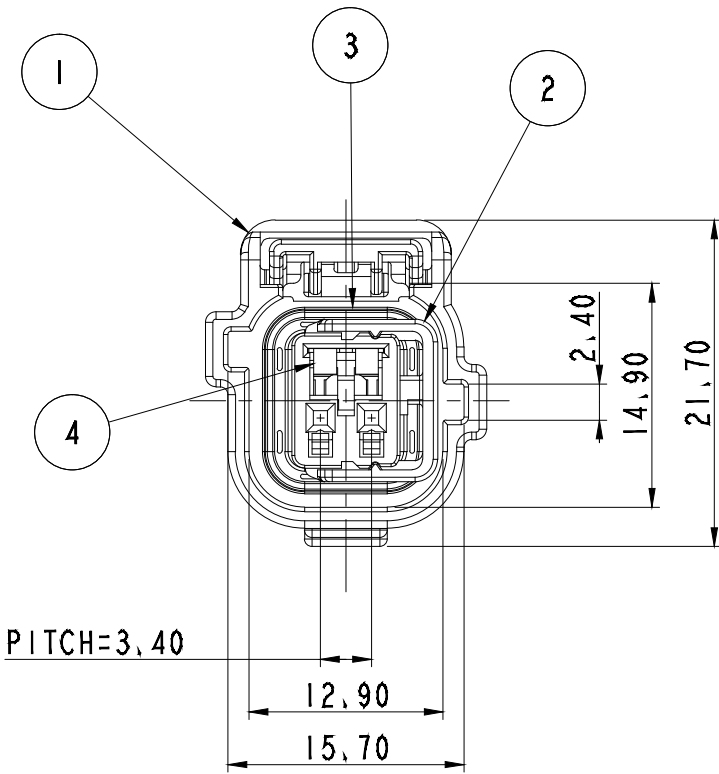


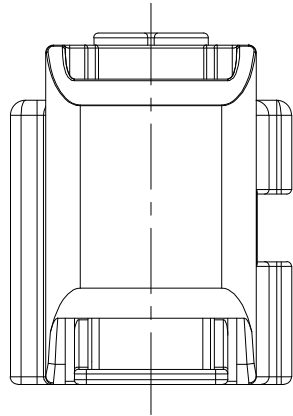

| NO. | MATERIAL | COLOR       |
|-----|----------|-------------|
| 0   | P B T    | NATURAL     |
| 1   |          | RED         |
| 2   |          | BLUE        |
| 20  |          | JADE        |
| 3   |          | YELLOW      |
| 4   |          | GRAY        |
| 40  |          | DARK GRAY   |
| 41  |          | LIGHT GRAY  |
| * 5 |          | BLACK       |
| 6   |          | DARK GREEN  |
| 7   |          | BROWN       |
| 8   |          | LIGHT GREEN |
| 9   |          | MAGENTA     |
| 11  |          | ORANGE      |

| GENERAL TOLERANCE(HOUSING) |        |        |        |         |         |         |        |       |        | USED ON |
|----------------------------|--------|--------|--------|---------|---------|---------|--------|-------|--------|---------|
| 10 MAX                     | 30 MAX | 50 MAX | 70 MAX | 100 MAX | 120 MAX | 250 MAX | 250 VR | ANGLE | ECCENT |         |
| ±0.15                      | ±0.2   | ±0.3   | ±0.4   | ±0.5    | ±0.75   | ±0.9    | ±1.4   | ±30'  | 0.1    |         |

주기  
1, 기능상 유해한 BURR 및 WELDLINE 등이 없을 것,  
2, 적용 TERMINAL : ST731441-3, 1442-3  
적용 CONNECTOR : MG646056-5  
3, 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬,  
PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서  
지정한 최대 허용 농도를 초과해서는 안된다,

NOTE  
1, MUST BE FREE OF BURR, WELDLINE  
AND IMPERFECTION THAT AFFECT FUNCTION.  
2, APPLICABLE TERMINAL : ST731441-3, 1442-3  
APPLICABLE CONNECTOR : MG646056-5  
3, 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY,  
CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL  
NOT EXCEED THE MAXIMUM PERMISSIBLE  
CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE  
& RoHS REGULATION.

| NO. | PART NAME                         | PART NO.   | MATERIAL     | COLOR   | QTY. |
|-----|-----------------------------------|------------|--------------|---------|------|
| 1   | C025 WP 2F HOUSING(SHORT BAR)     | MG676744-5 | PBT          | BLACK   | 1    |
| 2   | C025 WP 2F SIDE HOLDER(SHORT BAR) | MG676745   | PBT GF30     | NATURAL | 1    |
| 3   | C025 WP 2F INNER SEAL(SHORT BAR)  | R603481    | SILICONE     | RED     | 1    |
| 4   | C025 WP SHORT BAR                 | ST793423-3 | COPPER ALLOY | PRE-TIN | 1    |

|                                                                                       |                                    |  |                    |      |      |            |                                         |                                                                                                                            |              |                        |
|---------------------------------------------------------------------------------------|------------------------------------|--|--------------------|------|------|------------|-----------------------------------------|----------------------------------------------------------------------------------------------------------------------------|--------------|------------------------|
|                                                                                       |                                    |  |                    |      |      | MATERIAL   | SEE TABLE                               |  KOREA ELECTRIC<br>TERMINAL CO., LTD. |              |                        |
|                                                                                       |                                    |  |                    |      |      | FINISH     | SEE TABLE                               |                                                                                                                            |              |                        |
|                                                                                       |                                    |  |                    |      |      | WIRE RANGE |                                         |                                                                                                                            | CLASS WP     |                        |
|                                                                                       |                                    |  |                    |      |      | INSULATION |                                         |                                                                                                                            | TYPE C025    |                        |
|  | 검토 합격에 의한 도면 재작성<br>(ECO-1704-A22) |  | KIN                | CKY  | SUK  | 17.04.28   |                                         |                                                                                                                            |              |                        |
| LTR                                                                                   | REVISION RECORD                    |  | DR.                | CHK. | APP. | DATE       | TOLERANCE<br>EXCEPT<br>AS NOTED         | SEE TABLE                                                                                                                  | SCALE<br>2/1 | PART NO.<br>MG656894-5 |
| DR, YIK 2016.8.22                                                                     |                                    |  | CHK,               |      |      |            |                                         |                                                                                                                            |              |                        |
| CHK, LJE 2016.8.22                                                                    |                                    |  | APP, BIN 2016.8.22 |      |      |            | PART_NAME<br>C025 WP 2F ASSY(SHORT BAR) |                                                                                                                            |              |                        |

APPROVED

2019-11-06

KOREA ELECTRIC  
TERMINAL CO., LTD.  
Korea Electric Te  
rminal Co., LTD.

ISSUE MARK