

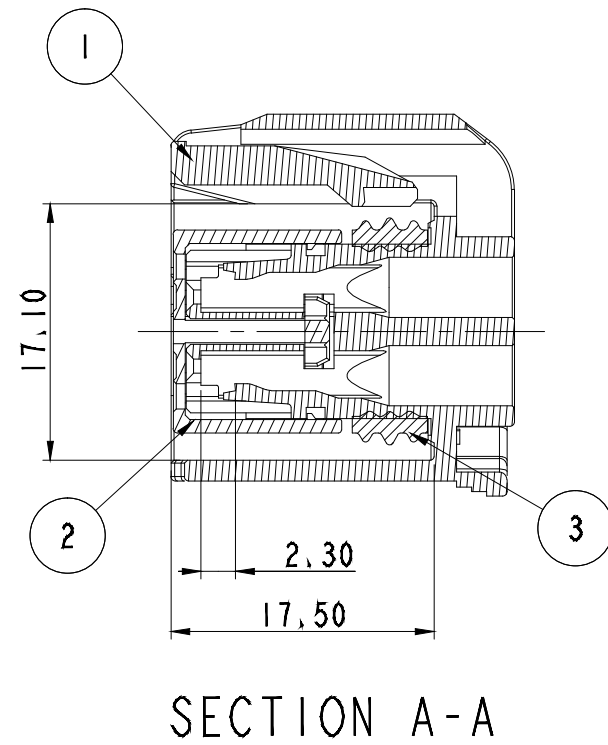
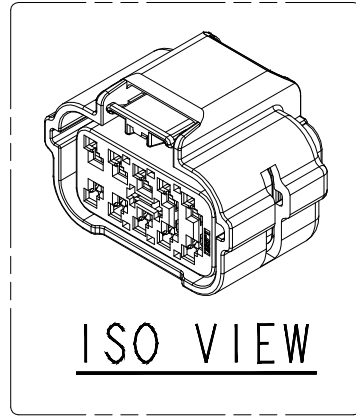
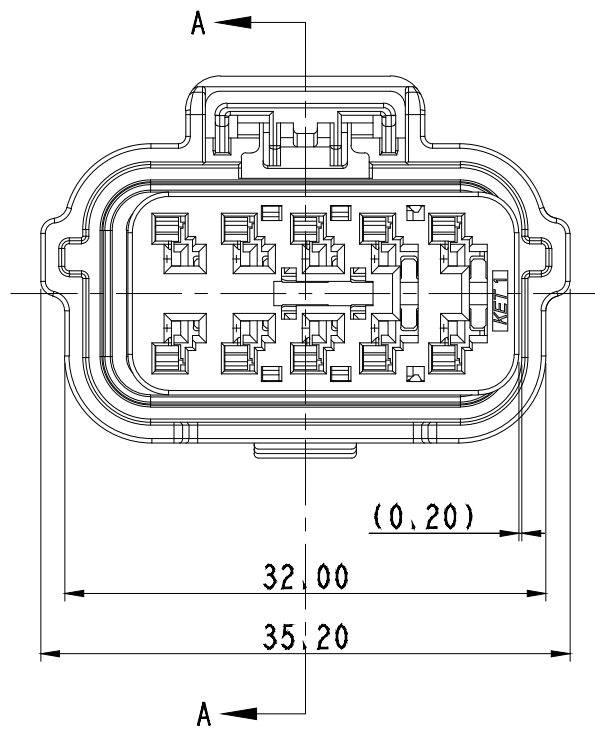


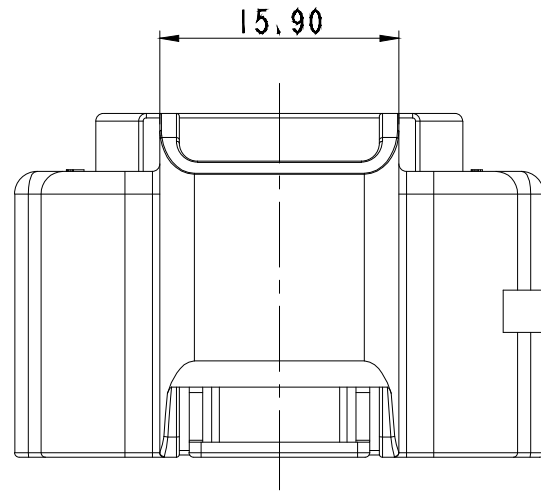

NO.	MATERIAL	COLOR
0	P B T 1503S	NATURAL
1		RED
2		BLUE
20		JADE
3		YELLOW
4		GRAY
40		DARK GRAY
41		LIGHT GRAY
* 5		BLACK
6		DARK GREEN
7		BROWN
8		LIGHT GREEN
9		MAGENTA
11		ORANGE

*

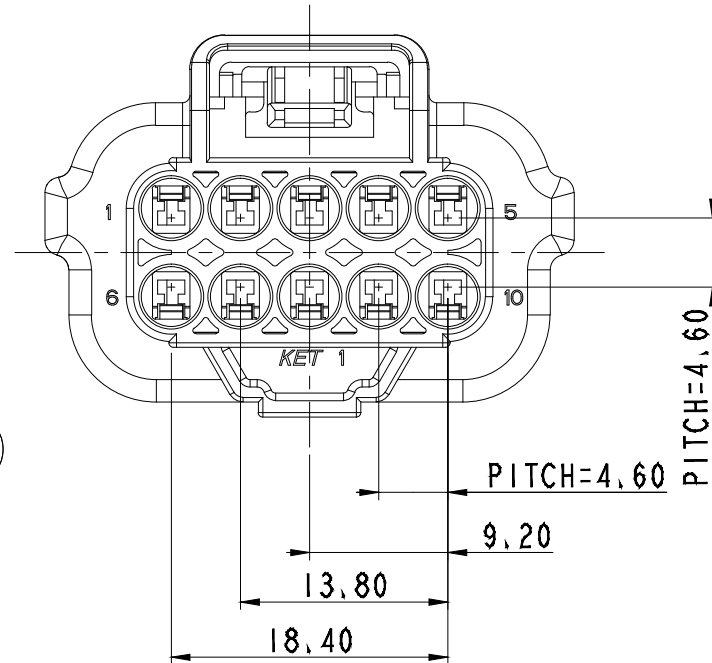

GENERAL TOLERANCE (HOUSING)


10MAX	30MAX	50MAX	70MAX	100MAX	120MAX	250MAX	250VR	ANGLE	ECCENT	USED ON
±0.15	±0.2	±0.3	±0.4	±0.50	±0.75	±0.90	±1.4	±30'	0.1	

주기

- 기능상 유해한 BURR 및 WELDLINE 등이 없을 것,
- 적용 TERMINAL ; ST731438-3, ST731439-3
적용 CONNECTOR ; MG646063-5
- 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다,

NOTE

- MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE TERMINAL ; ST731438-3, ST731439-3
APPLICABLE CONNECTOR ; MG646063-5
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

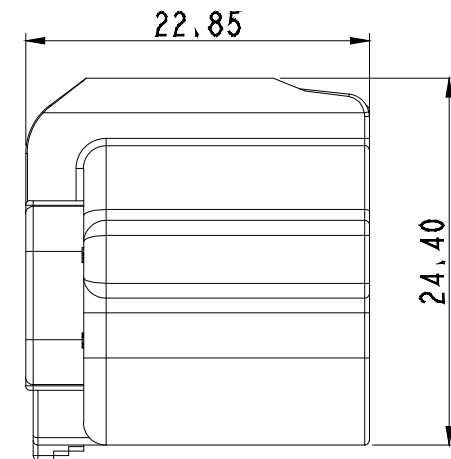


APPROVED

2019-11-05

KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.

ISSUE MARK

NO.	PART NAME	PART NO.	MATERIAL	COLOR	QTY.
1	C060 WP 10F HOUSING	MG676766-5	PBT	BLACK	1
2	C060 WP 10F SIDE HOLDER	MG676767	PBT-GF30	NATURAL	1
3	C060 WP 10F INNER SEAL	R603486	SILICONE	RED	1

						MATERIAL	SEE TABLE	 KOREA ELECTRIC TERMINAL CO., LTD.			
						FINISH	SEE TABLE				
						WIRE RANGE	-		CLASS WP		
						INSULATION	-		TYPE C060		
	점보 일차에 의한 형상도전충도 (ECO-1812-052)			AYT	AJH	CMS	18, 12, 04				
LTR	REVISION RECORD			DR,	CHK,	APP,	DATE	TOLERANCE EXCEPT AS NOTED	SEE TABLE	SCALE 2/1	PART NO, MG656902-5
DR,		KMY 2016.8.31		CHK,		CKI 2016.8.31					
CHK,		LJE 2016.8.31		APP,		BIN 2016.8.31		PART_NAME C060 WP 10F ASSY			