

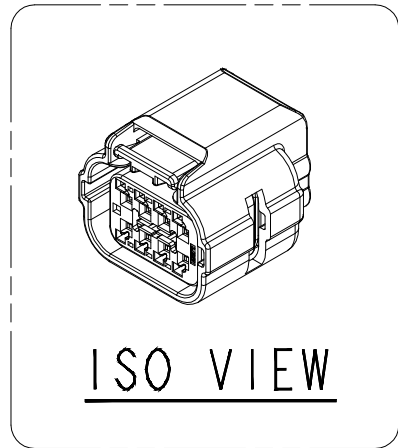
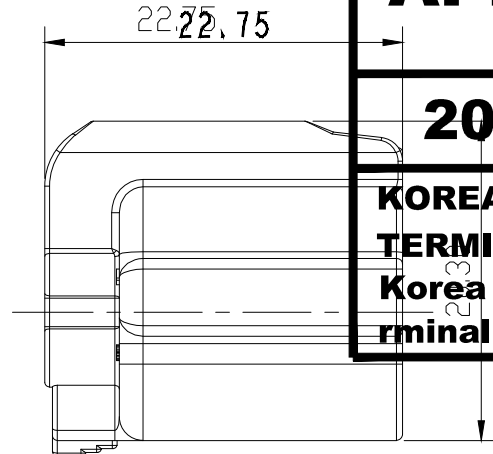


GENERAL TOLERANCE (HOUSING)										USED ON
10 MAX	30 MAX	50 MAX	70 MAX	100 MAX	120 MAX	250 MAX	250 VR	ANGLE	ECCENT	
±0.15	±0.2	±0.3	±0.4	±0.5	±0.75	±0.9	±1.4	±30'	0.1	

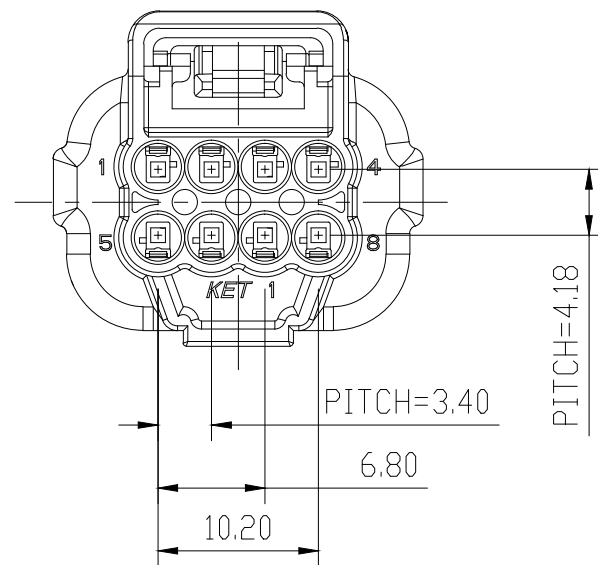

1. 기능상 유해한 BURR 및 WELDLINE 등이 없을 것,
2. 적용 TERMINAL : ST731441-3, ST731442-3
적용 DUMMY SEAL : MG685518
적용 CONNECTOR : MG646043-5
3. 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다,

1. MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE TERMINAL : ST731441-3, ST731442-3
APPLICABLE DUMMY SEAL : MG685518
APPLICABLE CONNECTOR : MG646043-5
3. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

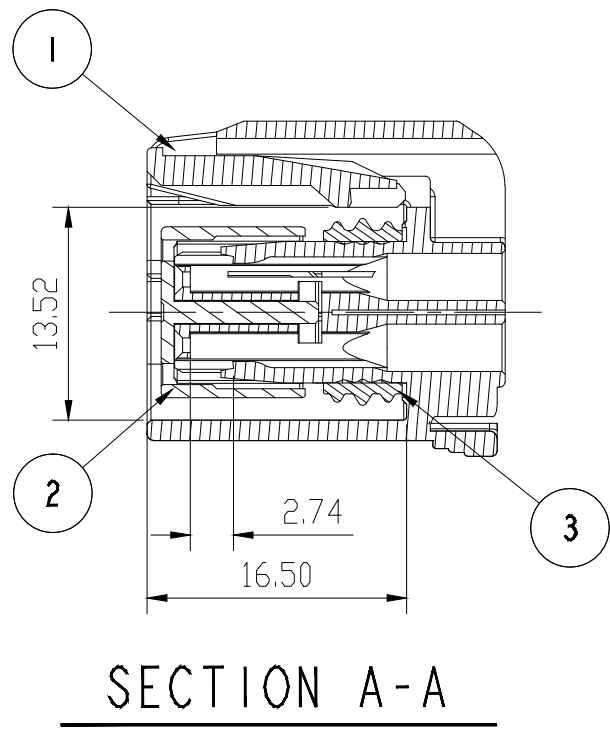

APPROVED

2019-11-06

**KOREA ELECTRIC
TERMINAL CO., LTD.**
Korea Electric Te
rminal Co., LTD.

ISSUE MARK

						MATERIAL	SEE TABLE	 KIET KOREA ELECTRIC  ENGINEERED TERMINAL CO., LTD.
						FINISH	SEE TABLE	
						WIRE RANGE	-	
						INSULATION	-	
 주의 알곡에 따른 항전도율 변동 (ECO-1802-179 근거 또한 제작성)		CHW	AJH	CWS	18, 03, 08			CLASS WP
								TYPE C025
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED SEE TABLE	SCALE 2/1	PART NO. MG656940-5
DR, KMY 2017, 4, 31		CHK, CKI 2017, 4, 31				PART-NAME C025 WP 8F ASSY		
CHK,		APP, LJE 2017, 4, 31						