
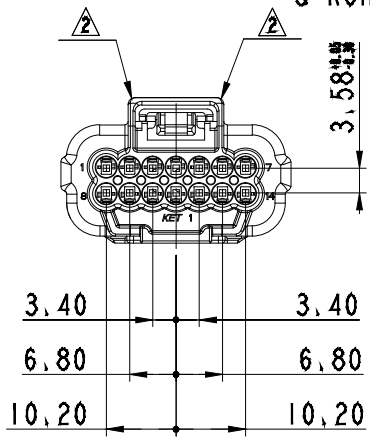
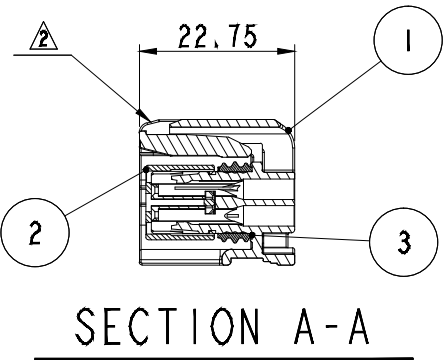
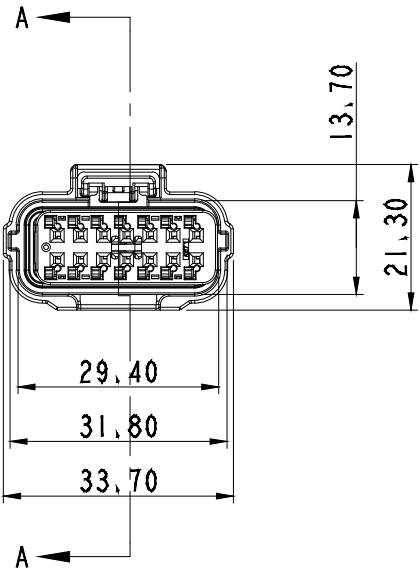



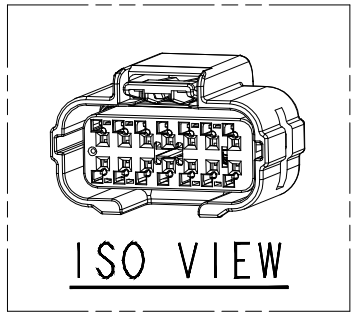

NO.	MATERIAL	COLOR
0	P B T	NATURAL
1		RED
2		BLUE
20		JADE
3		YELLOW
4		GRAY
40		DARK GRAY
41		LIGHT GRAY
* 5		BLACK
6		DARK GREEN
7		BROWN
8		LIGHT GREEN
9		MAGENTA
11		ORANGE

GENERAL TOLERANCE (HOUSING)											USED ON
10 MAX	30 MAX	50 MAX	70 MAX	100 MAX	120 MAX	250 MAX	250 VR	ANGLE	ECCENT		
±0.15	±0.2	±0.3	±0.4	±0.5	±0.75	±0.9	±1.4	±30'	0.1		

주 기
1, 기능상 유해한 BURR 및 WELDLINE 등이 없을 것,
2, 적용 TERMINAL : ST731441-3, ST731442-3
적용 DUMMY SEAL : MG685518
△적용 CONNECTOR : MG646117-5, MG646118-2,
MG646119-3, MG646146-41, MG646234-6
3, 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬,
PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서
지정된 최대 허용 농도를 초과해서는 안된다.

NOTE
1, MUST BE FREE OF BURR, WELDLINE
AND IMPERFECTION THAT AFFECT FUNCTION.
2, APPLICABLE TERMINAL : ST731441-3, ST731442-3
APPLICABLE DUMMY SEAL : MG685518
△APPLICABLE CONNECTOR : MG646117-5, MG646118-2,
MG646119-3, MG646146-41, MG646234-6
3, 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY,
CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL
NOT EXCEED THE MAXIMUM PERMISSIBLE
CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE
& RoHS REGULATION.

NO.	PART NAME	PART NO.	MATERIAL	COLOR	QTY.
1	C025 WP 14F HOUSING	MG676961-5	SEE TABLE	SEE TABLE	1
2	C025 WP 14F FRONT HOLDER	MG676962	PBT-GF30	NATURAL	1
3	C025 WP 14F INNER SEAL	R603570	SILICONE	RED	1

						MATERIAL	SEE TABLE	 KOREA ELECTRIC TERMINAL CO., LTD.	
						FINISH	SEE TABLE		
2	ECO-1906-230 근거 도면 제작상	LND	KSC	CJH	19.06.19	WIRE RANGE		CLASS	C025
1	ECO-1809-152 근거 도면 제작상	CYK	AJH	CMS	18.09.13	INSULATION		TYPE	WP
0	제품원격에 따른 형상도면 출도	CYK	AJH	CMS	18.01.30	TOLERANCE EXCEPT AS NOTED		SCALE	PART NO.
LTR		REVISION RECORD			DR.	CHK.	APP.	DATE	MG656950-5
DR.		LKS 17.05.23			CHK.		SSH 17.05.31		
CHK.					APP.		LJE 17.05.31		
									PART_NAME
									C025 WP 14F ASSY

APPROVED

2019-11-06

KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.

ISSUE MARK