





PART NO. MG656986

CUSTOMER DRAWING


*

NO.	MATERIAL	COLOR
0	P B T	NATURAL
1		RED
2		BLUE
20		JADE
3		YELLOW
4		GRAY
40		DARK GRAY
41		LIGHT GRAY
5		BLACK
6		DARK GREEN
7		BROWN
8		LIGHT GREEN
9		MAGENTA
11		ORANGE

			GENERAL TOLERANCE (HOUSING)									
			10 MAX	30 MAX	50 MAX	70 MAX	100 MAX	120 MAX	250 MAX	250 VR	ANGLE	ECCENT
			±0.15	±0.2	±0.3	±0.4	±0.5	±0.75	±0.9	±1.4	±30′	0.1
NO.	ASSY NAME	ASSY No.	PART	PART NAME		PART NO.	MATERIAL		COLOR			
1	090II DIAGNOSIS 6F ASSY	MG656986	1	090II DIAGNOSIS 6F HOUSING		MG677062	SEE TABLE		SEE TABLE			
			2	090II DIAGNOSIS 6F SPACER		MG671043	PBT		NATURAL			

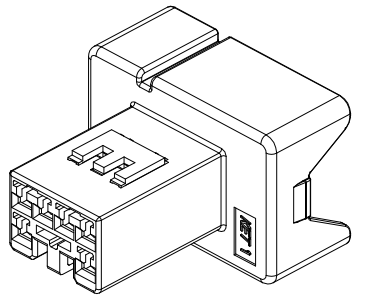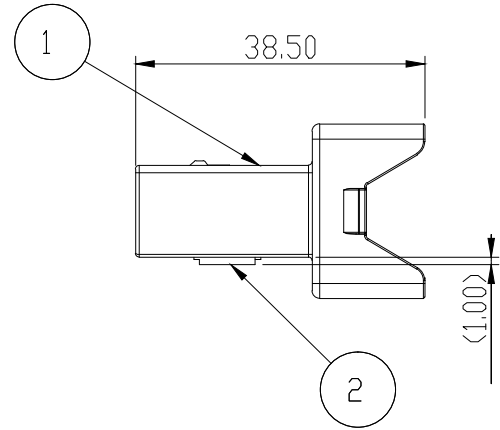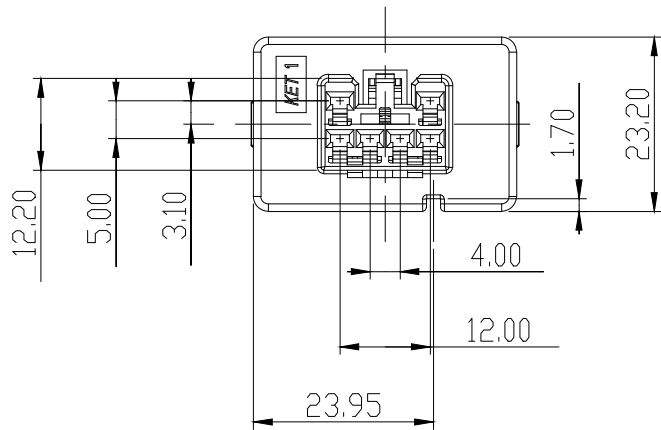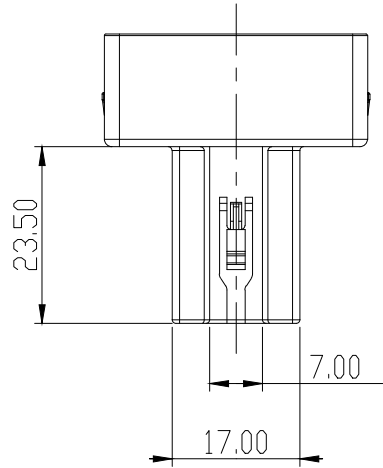

ISO VIEW

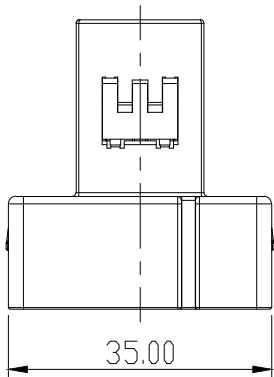

주기

1. 기능상 유해한 BURR 및 WELDLINE 등이 없을 것
2. 적용 TERMINAL : ST730675-3, 676-3, 677-3
3. 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NOTE

1. MUST BE FREE OF FLASH, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE TERMINAL : ST730675-3, 676-3, 677-3
3. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

APPROVED

2019-11-06

KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.

ISSUE MARK

					MATERIAL	SEE TABLE	KIET ENGINEERED KOREA ELECTRIC TERMINAL CO., LTD.	
					FINISH	SEE TABLE		
					WIRE RANGE	-	CLASS	090II
					INSULATION	-	TYPE	비방수
					TOLERANCE EXCEPT AS NOTED	SEE TABLE	SCALE 1/1	PART NO. MG656986
					PART_NAME	090II DIAGNOSIS 6F ASSY		