

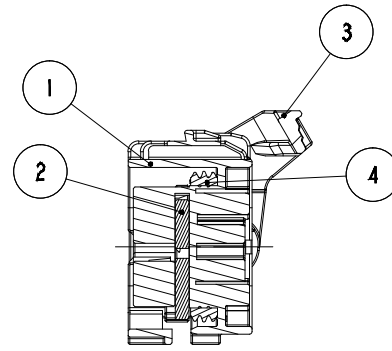

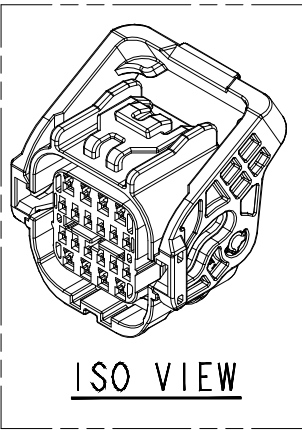

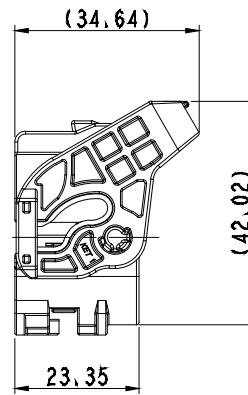


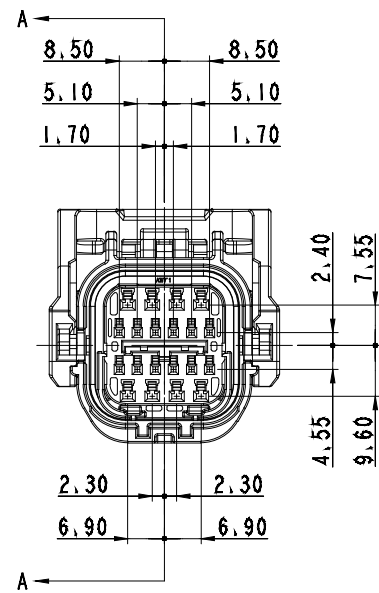

SECTION A-A



GENERAL TOLERANCE (HOUSING)										USED ON
10 MAX	30 MAX	50 MAX	70 MAX	100 MAX	120 MAX	250 MAX	250 VR	ANGLE	ECCENT	
±0.15	±0.2	±0.3	±0.4	±0.5	±0.75	±0.9	±1.4	±30'	0.1	

주기

2. 적용 TERMINAL : (C025) ST731441-3
(C060) ST731438-3, ST731439-3
적용 CONNECTOR : MG646445
적용 DUMMY SEAL : (C025) MG685518
(C060) MG685519

3. 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NOTE

1. MUST BE FREE OF BURR, WELDLINE
AND IMPERFECTION THAT AFFECT FUNCTION,
2. APPLICABLE TERMINAL : (C025) ST731441-3
: (C060) ST731438-3, ST731439-3

APPLICABLE CONNECTOR : MG646445

APPLICABLE DUMMY SEAL : (C025) MG685518
(C060) MG685519

3. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

NO.	MATERIAL	COLOR
0	PBT	NATURAL
1		RED
2		BLUE
20		JADE
3		YELLOW
* 4	GRAY	
40	DARK GRAY	
41	LIGHT GRAY	
* 5	BLACK	
6	DARK GREEN	
7	BROWN	
8	LIGHT GREEN	
9	MAGENTA	
11	ORANGE	

PART LIST

NO,	PART NAME	PART NO,	MATERIAL	COLOR	QTY,
1	HEAD LAMP C025060 WP 20F HOUSING	MG677768	SEE TABLE	SEE TABLE	1
2	HEAD LAMP C025060 WP 20F SPACER	MG677769	PBT-GF30	NATURAL	1
3	HEAD LAMP C025060 WP 20F LEVER	MG677770-5	POM	BLACK	1
4	HEAD LAMP C025060 WP 20F INNER SEAL	R604043	SILICONE	RED	1

						MATERIAL		SEE TABLE	 KOREA ELECTRIC TERMINAL CO., LTD.	
						FINISH		SEE TABLE		
						WIRE RANGE		-	CLASS	025/060
						INSULATION		-	TYPE	방수
	조립 및작업 시 안전 재작성	CTK	WDH	CMS	21.05.27					
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	THE RANGE OF NOTES	SEE TABLE	SCALE 1/1	PART NO.	MG657201
DR, CYK		2020.06.26		CHK,						
CHK, WDH		2020.06.26		APP, CMS		2020.06.26		PART. NAME		HEAD LAMP C025060 WP 20F ASSY

APPROVED

2021-11-01

**OREA ELECTRIC
TERMINAL CO., LTD.**
orea Electric Te
ninal Co., LTD.

ISSUE	MARK
-------	------

(DIMENSIONS IN MM)