



NO.	PART NAME	PART NO.	METERIAL	QT'Y	FINISH
1	LICENCE PLATE LAMP HOLDER	MG 672623	PBT	1	BROWN
2	LICENCE PLATE LAMP TERMINAL	P 900501	COPPER ALLOY	2	UNPLATE
3	INNER SEAL	P 900479	SILICONE	1	RED
4	SEAL GASCKET	P 901455	SILICONE	1	D/GREEN

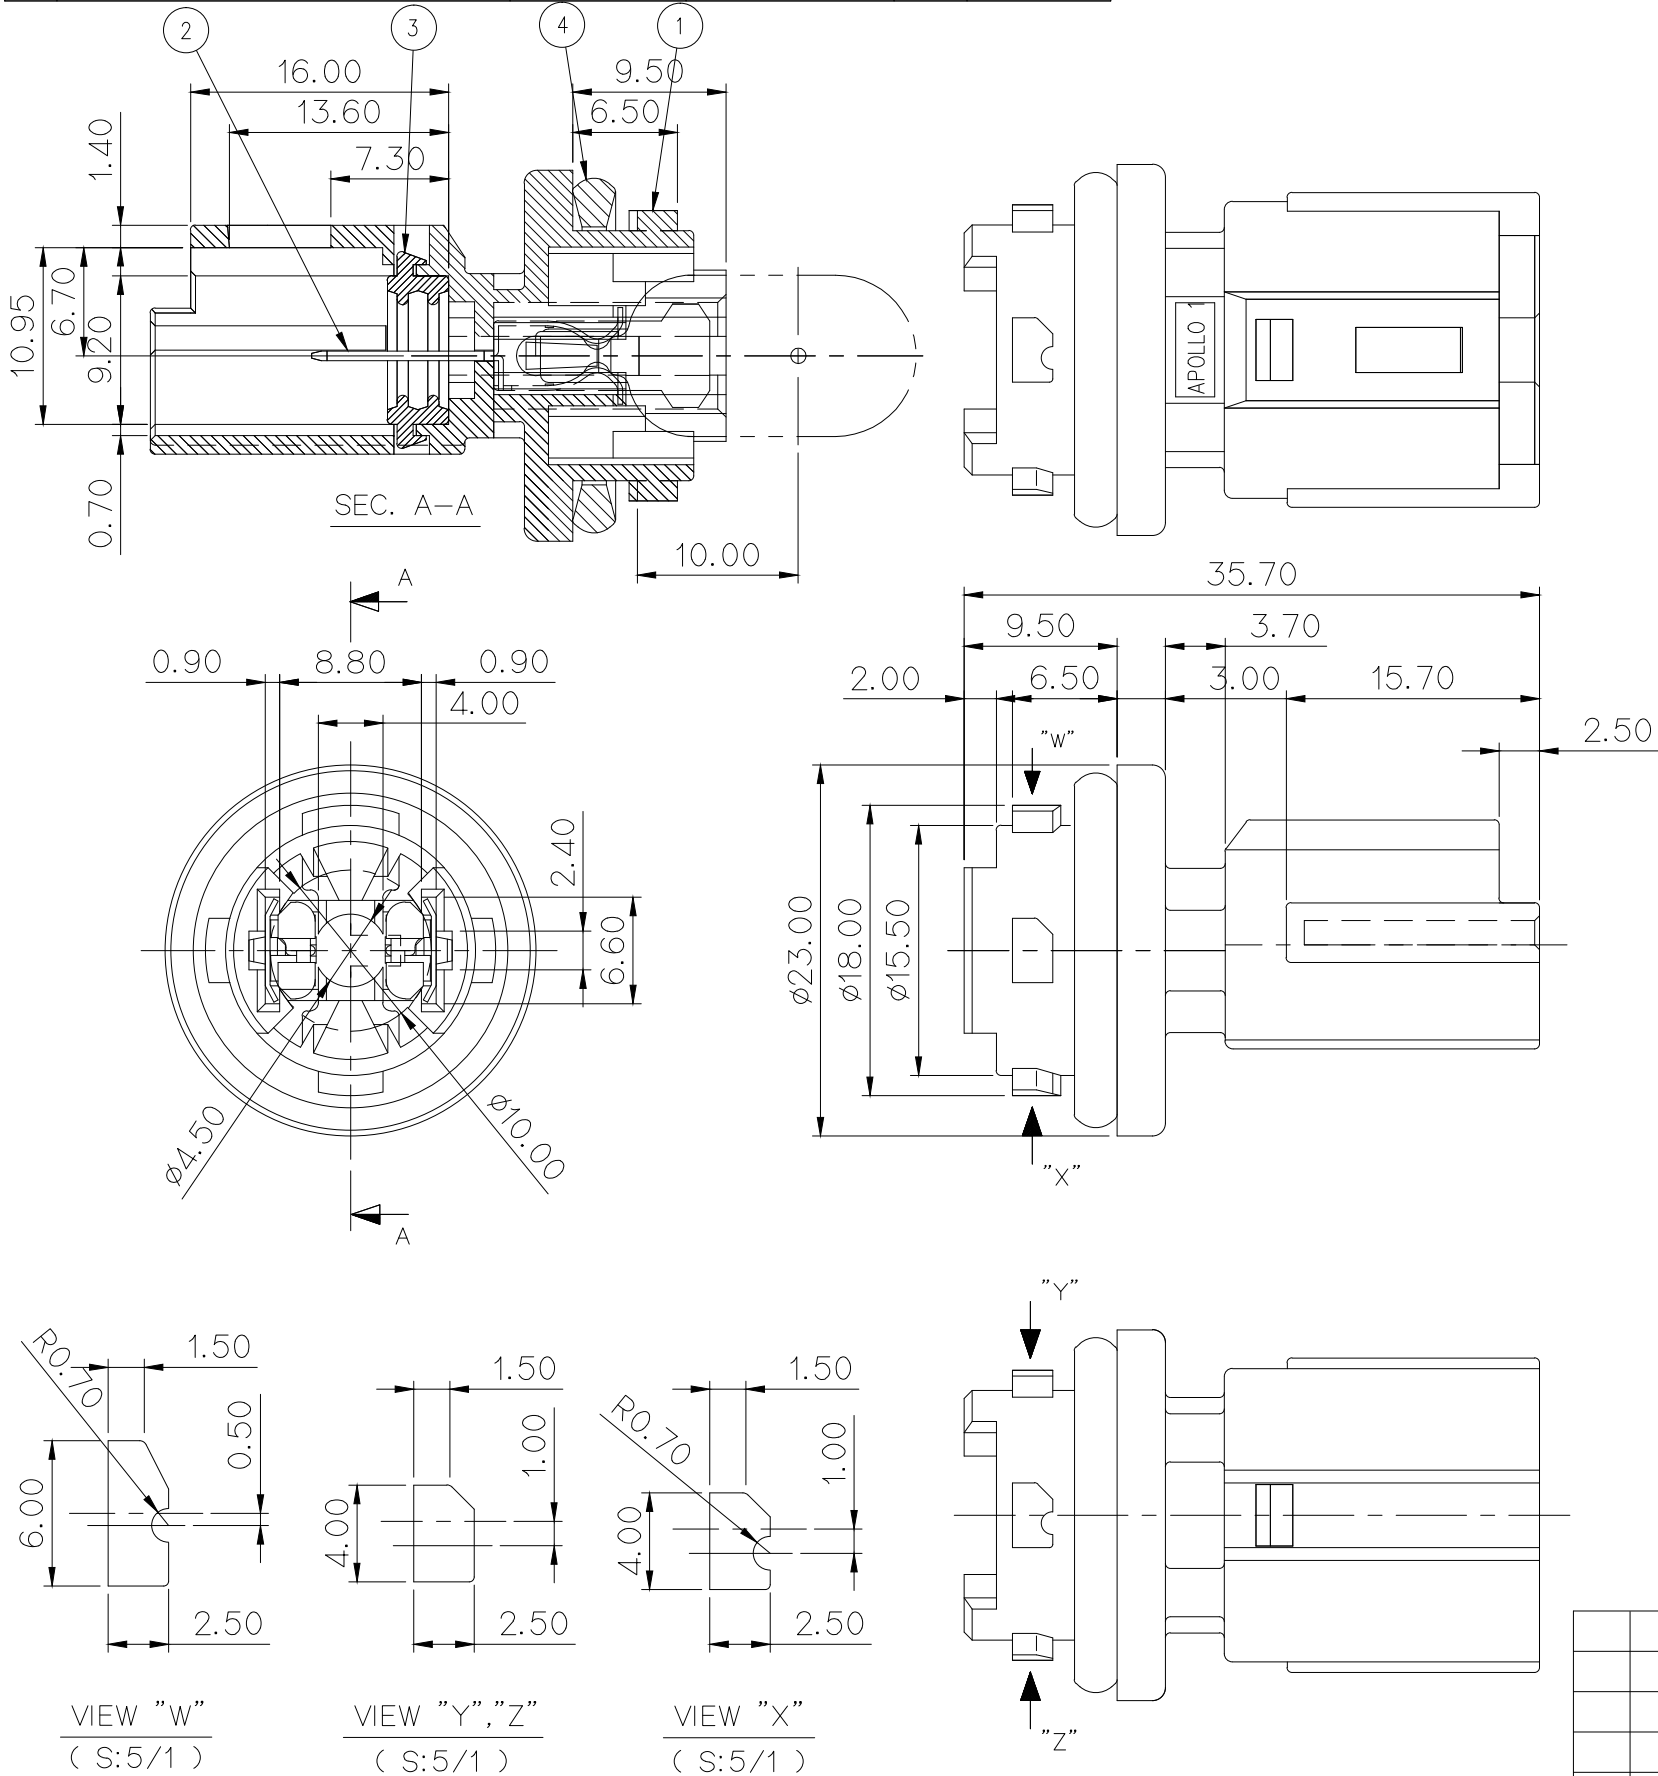

GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30′	0.1	
		GENERAL TOLERANCE (TERMINAL)					
		10MAX	20MAX	45MAX	ANGLE	ECCENT	
		±0.2	±0.25	±0.3	±30′	0.1	
GENERAL TOLERANCE (SILICONE RUBBER)							
0 TO 6	6 TO 10	10 TO 18	18 TO 30	30 TO 50	50 TO 80		
	±0.3	±0.5	±0.75	±30′	0.1		

NOTE

- UNLESS OTHERWISE SPECIFIED ALL RADII TO BE 0.3 RADIUS.
- MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE OF CONN'T : MG610320
- WATERPOOF FUNCTION MUST BE SATISFIED WITH 0.5kgf/cm² – 30sec. ON ES–91500

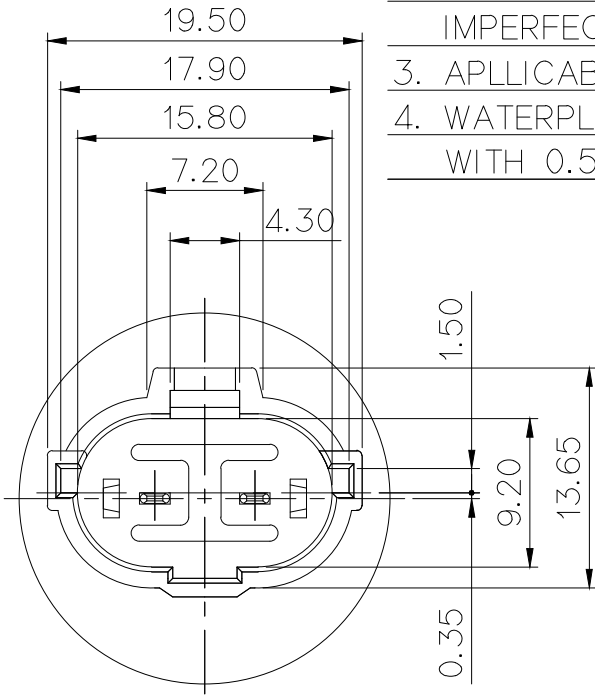

주 기

- 지시하지 않은 반경 R은 0.3으로 한다.
- 기능상 유해한 BURR 및 WELDLINE등이 없을 것.
- 적용 CONNECTOR : MG610320
- 방수 기능은 ES–91500에 준하여 0.5kgf/cm² –30sec 에 만족 할 것.

APPROVED

2016-03-07

KOREA ELECTRIC
TERMINAL CO., LTD.
Connector Develop
ment Team 1

ISSUE MARK

					MATERIAL		SEE TABLE	 KOREA ELECTRIC TERMINAL CO., LTD.	
					FINISH		SEE TABLE		
					WIRE RANGE		CLASS .070		
					INSULATION		TYPE 480-07-700		
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE 2/1	PART NO. MG662675
DR.		BIN. ,02.03.27		CHK.			PART NAME		
CHK.				APP.			LICENCE PLATE LAMP HOLDER ASS'Y – "B"		