

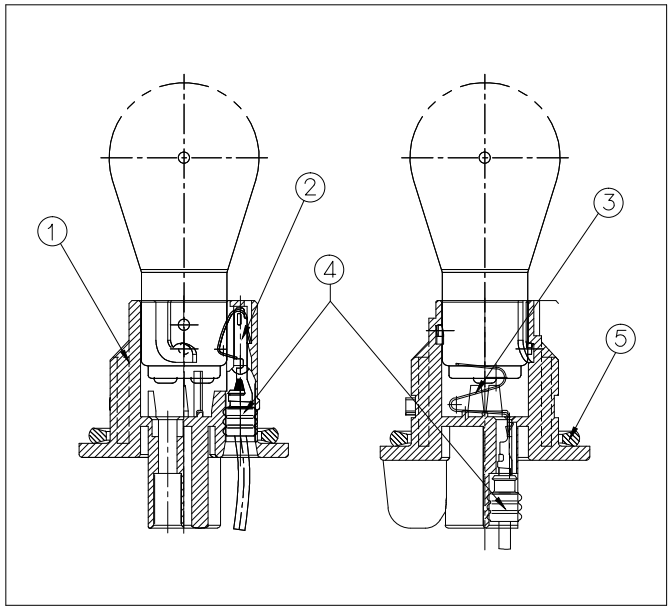
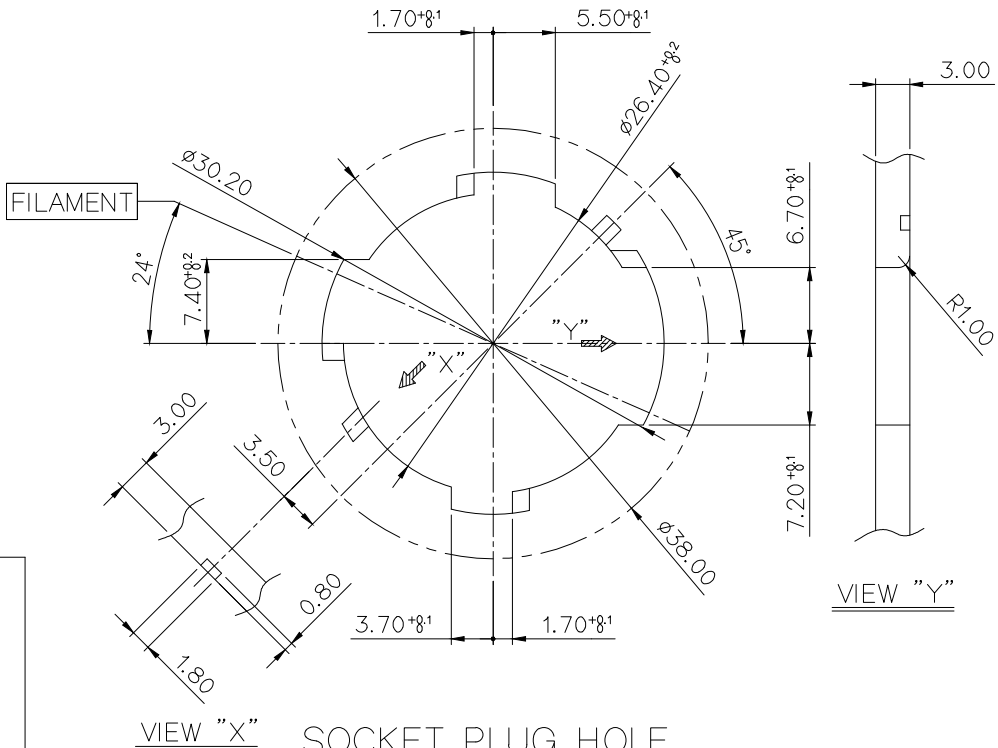


NO.	PART NO.	PART NAME	MATERIAL	FINISH
1	MG672560	RCL B/H WP DOUBLE HS'G	PA66+MR	GRAY
2	ST760521-1	POSITIVE TERMINAL	PBP	UNPLATE
3	ST760795-1	EARTH TERMINAL	COPPER ALLOY	UNPLATE
4	MG682028	WIER SEAL	SILICONE	BLACK
5	P901400	SEAL GASKET	SILICONE	BLACK

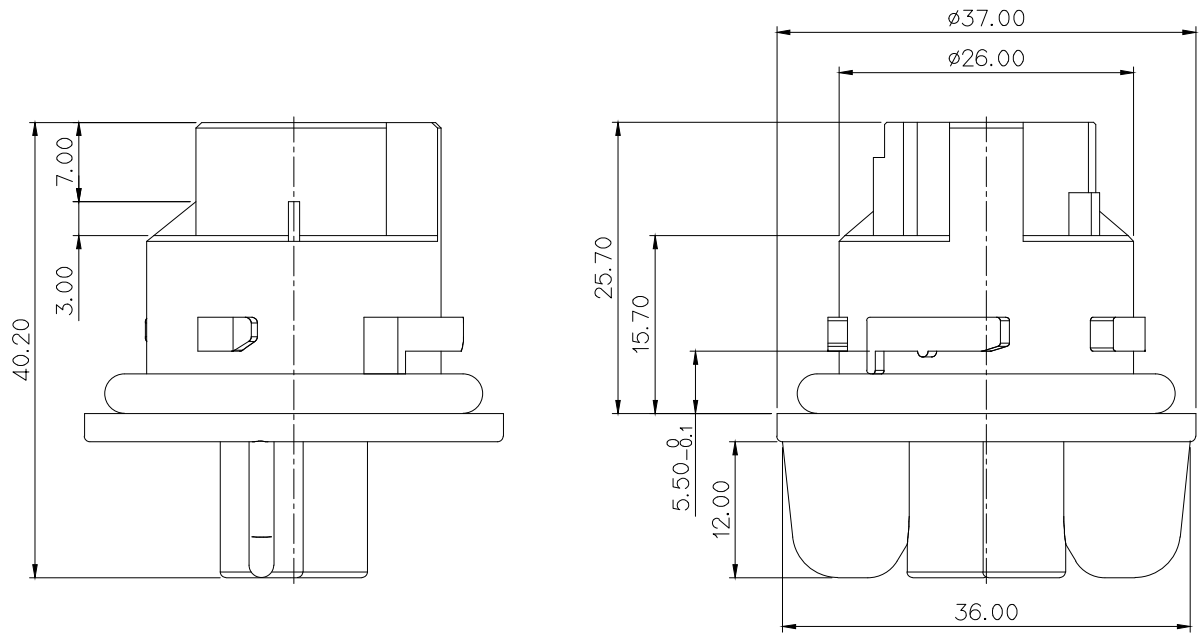

ASSEMBLY



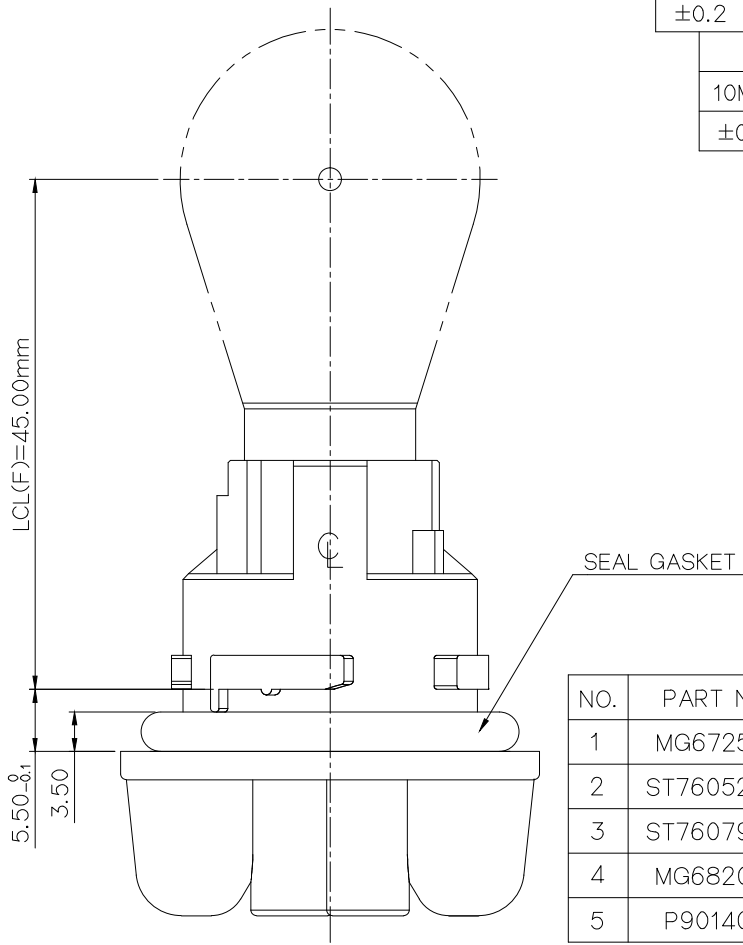


주 기

2. 방수 기능은 ES 91500에 준하여 0.5Kgf/cm-30sec
에 만족 할 것.

NOTE

- | |
|--|
| 1. THIS DRAWING IS BULB HOLDER ASS'Y REQUEST SPECIFICATION DRAWING |
| 2. WATERPROOF FUNCTION MUST BE SATISFIED WITH 0.5Kg _f /cm ² – 30sec. ON ES-91500 |

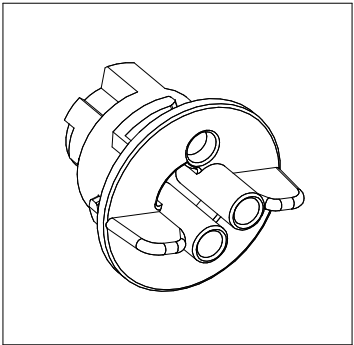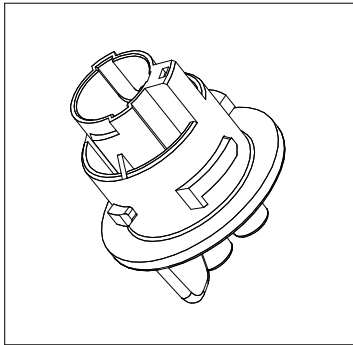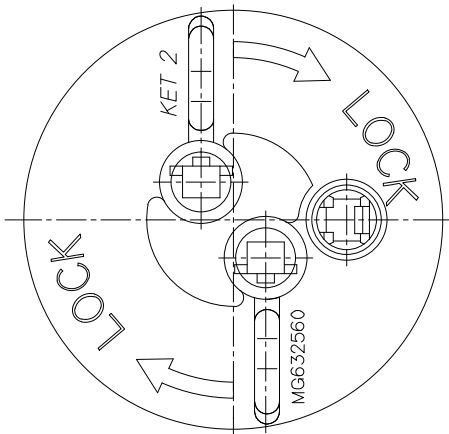

3D VIEW(참고용)

						MATERIAL	SEE TABLE	 KOREA ELECTRIC TERMINAL CO., LTD.
						PINISH	SEE TABLE	
						WIRE RANGE	CLASS	
						INSULATION	TYPE	
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE	
DR.	'BIN, '02.05.20	CHK.	KO,	'02.05.20		SEE TABLE	2/1	MG662850
CHK.		APP.		5/22	PART NAME			
					RCL B/H WP DOUBLE ASS'Y (F:45)			