



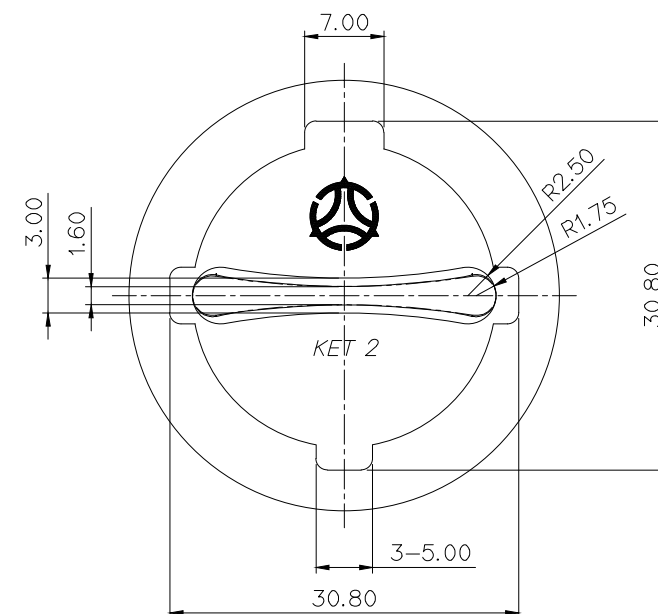

Technical drawing of a mechanical part. The part has a total width of 7.00 and a total height of 3.00. The top surface is a horizontal line. The bottom surface is a horizontal line. The left side is a vertical line. The right side is a vertical line. The top-left corner is rounded with a radius of R0.30. The bottom-left corner is rounded with a radius of R0.50. The distance from the left edge to the start of the bottom-left radius is 5.50. The distance from the left edge to the start of the top-left radius is 5.50. The distance from the left edge to the start of the bottom-right radius is 5.50. The distance from the left edge to the start of the top-right radius is 5.50. The distance from the left edge to the start of the bottom-right radius is 5.50. The distance from the left edge to the start of the top-right radius is 5.50. The distance from the left edge to the start of the bottom-right radius is 5.50. The distance from the left edge to the start of the top-right radius is 5.50.

VIEW "D"(5/1)

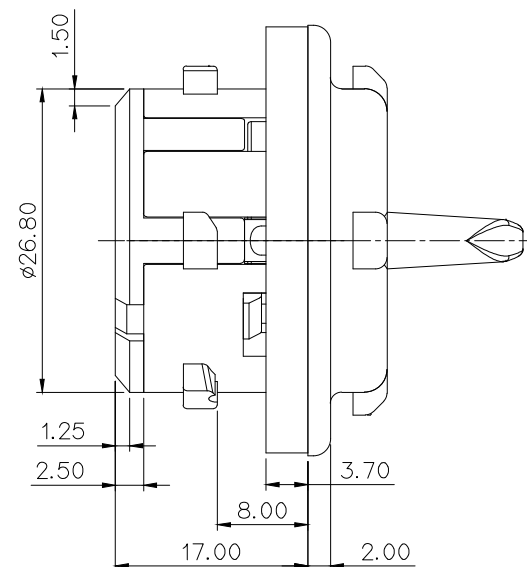

ASSY PART NO


MG663046-41MG663046-41BMG664481-41

**KOREA ELECTRIC
TERMINAL CO., LTD.**
Connector Develop
ment Team 3

ISSUE MARK

1. UNLESS OTHERWISE SPECIFIED ALL RADII
TO BE 0.3 RADIUS.
2. UNLESS OTHERWISE SPECIFIED ALL CHAMFERS
TO BE 0.3 CHAMFER.
3. MUST BE FREE OF FLASH, SINK
AND IMPERFECTION THAT AFFECT FUNCTION.
4. FLASH ARE NOT ALLOWED ON CONTACT MOLDED
PART OF SEAL GASKET.
5. APPLICABLE OF BRACKET: MG663059

6. HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

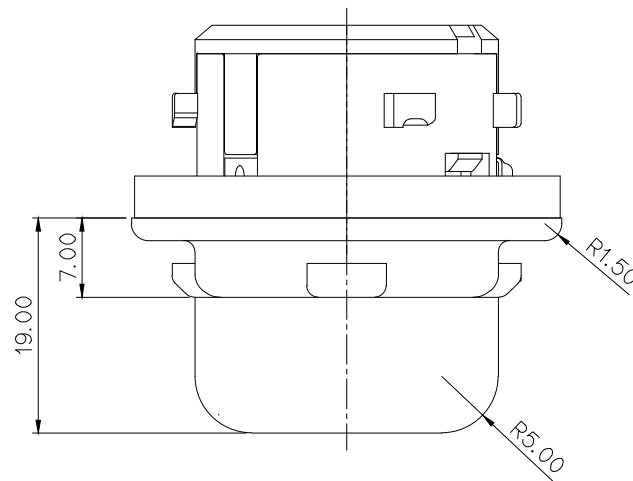

1. 지시하지 않은 반경 R은 0.3으로 한다.
2. 지시하지 않은 모따기 C는 0.3으로 한다.
3. 기능상 유해한 BURR 및 WELDLINE 등이 없을 것.
4. SEAL GASKET 접촉 및 RIB PARTING면에 BURR 등이 없을 것.
5. 적용 BRACKET : MG663059
6. 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

ECO-1504-446 근거 도면 변경		NKT	SSH	BIN	'15.01.29	MATERIAL SEE TABLE		 KOREA ELECTRIC TERMINAL CO., LTD.	
ECO-1502-052 근거 도면 변경		CJH			'15.01.29	FINISH SEE TABLE			
GASKET SEAL(GREEN) 사항추가		HKS			'08.06.04	WIRE RANGE		CLASS	
TM'L 오조립 방지위한 형상변경		BIN			04.11.29	INSULATION		TYPE	
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE ACCURACY AS NOTED	SCALE 2/1	PART NO. <u>A/A</u> MG663046-41 MG664481-41, MG663046-41B
DR.	BIN, '04.01.28		CHK.						
CHK.	<u>—</u> 1/31		APP. <u>HB</u> 1/31			PART NAME TURN SIGNAL B/H WP ASS'Y (SINGLE)			