

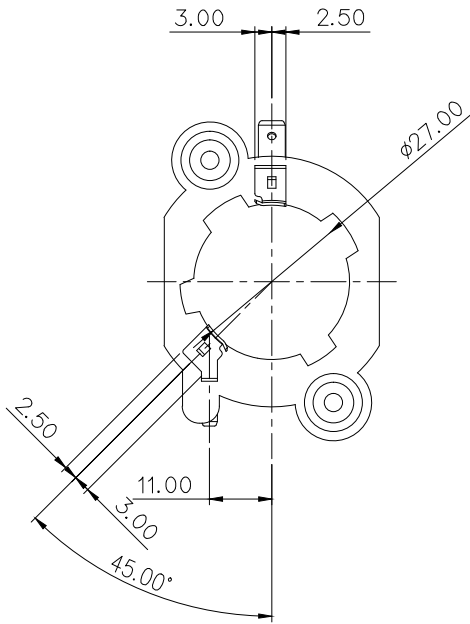
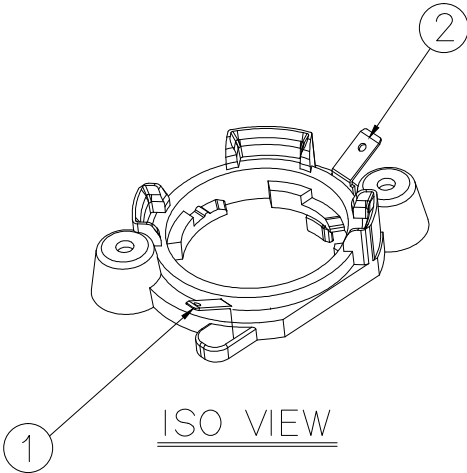







TERMINAL POSITION

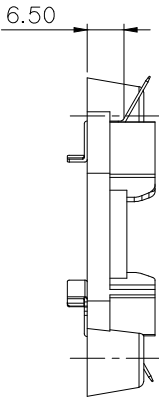

ISO VIEW

NO.	PART NAME	PART NO.	MATERIAL	U/S	FINSH
1	T/S B/H 110 WIRE EARTH TM'L	P901775	BRASS	1	PRE-TIN
2	T/S B/H 187 WIRE EARTH TM'L	P901776	BRASS	1	PRE-TIN

GENERAL TOLERANCE (TERMINAL)					GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	20MAX	45MAX	ANGLE	ECCENT	10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.25	±0.3	±30'	0.1	±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

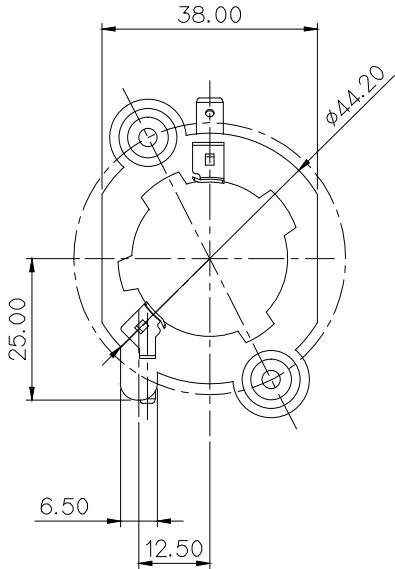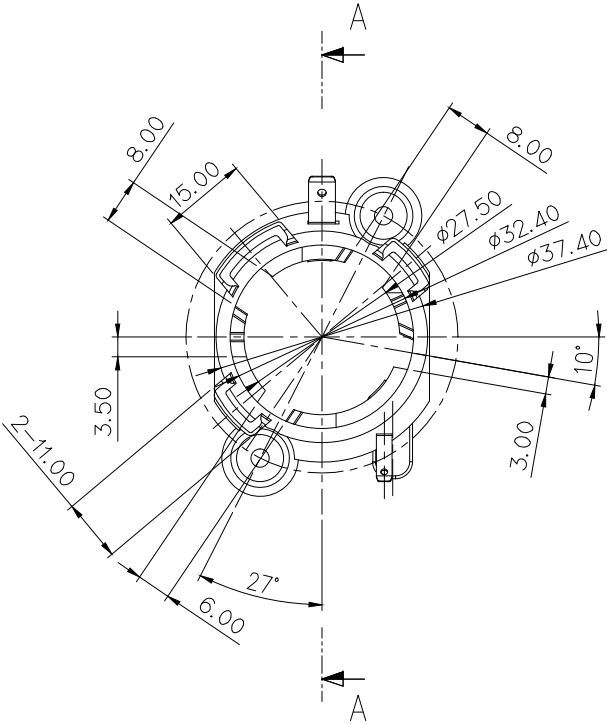


주 기


- 지시하지 않은 반경 R은 0.3으로 한다.
- 지시하지 않은 모따기 C는 0.3으로 한다.
- 기능상 유해한 BURR 및 WELDLINE등이 없을것.
- 적용 BULB HOLDER : MG663046, MG663070
- 적용 TERMINAL : ST730052, ST730245

NOTE

- UNLESS OTHERWISE SPECIFIED ALL RADII TO BE 0.3 RADIUS.
- UNLESS OTHERWISE SPECIFIED ALL CHAMFERS TO BE 0.3 CHAMFER.
- MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE OF BULB HOLDER : MG663046, 70
- APPLICABLE OF TERMINAL : ST730052, ST730245

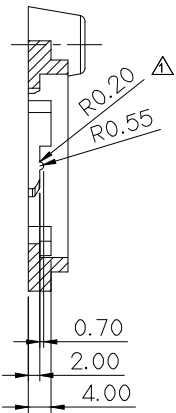

SECTION A-A

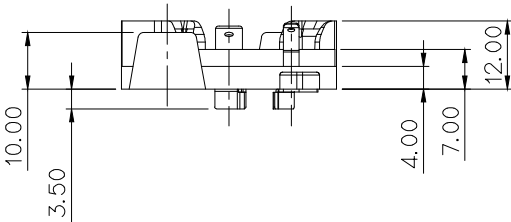

APPROVED

2016-03-11

KOREA ELECTRIC
TERMINAL CO., LTD.
Product Development Team 1

ISSUE MARK

						MATERIAL △PA66+GF13%		KIET KOREA ELECTRIC ENGINEERED TERMINAL CO., LTD.		
						FINISH D/GRAY				
△	설계사양변경(S070132)근거	HEM		07.06.04	WIRE RANGE		CLASS			
△	DIM'S 변경	BIN	—	04.10.09	INSULATION		TYPE			
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SEE TABLE	SCALE 1/1	PART NO. MG663059
DR.	BIN, '04.01.28		CHK.			PART NAME				
CHK.	— '04.01.31		APP. — '04.01.31			T/SIGNAL B/H BRACKET ASS'Y(SINGLE)				