


GENERAL TOLERANCE (HOUSING)							USED ON
10 MAX	50 MAX	100 MAX	250 MAX	250 VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

주기

1. 지시하지 않은 R은 전부 0.5로 할 것.
2. 지시하지 않은 모따기 C는 0.5으로 한다.
3. 제품 기능상 유해한 BURR, 변형 및 WELDLINE 등이 없을 것.
4. 적용 HOUSING: MG653602-41 , MG653601-5
5. KET문자 : 기울기 15° (문자 H : 0.1~0.2, SIZE : 1.0)
CAVITY NO. : 기울기 0° (문자 H : 0.1~0.2, SIZE : 1.0)
6. 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬,PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

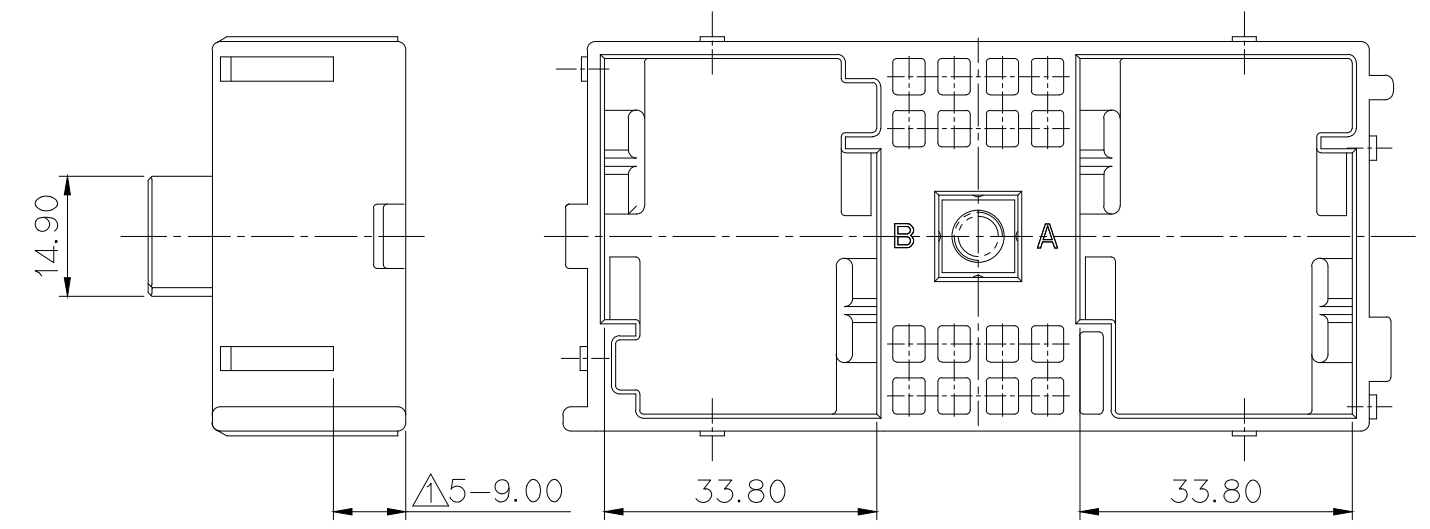

NOTE

1. UNLESS OTHERWISE SPECIFIED ALL RADIUS TO BE 0.5 RADIUS
2. UNLESS OTHERWISE SPECIFIED ALL CHAMFERS TO BE 0.5 CHAMFER
3. MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
4. APPLICABLE HOUSING: MG653602-41 , MG653601-5
5. KET MARK : TAPER 15° (H : 0.1~0.2, SIZE : 1.0)
CAVITY NO. : TAPER 0° (H : 0.1~0.2, SIZE : 1.0)
6. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.



ISSUE MARK

		MATERIAL		PBT		KOREA ELECTRIC TERMINAL CO., LTD.	
		FINISH		BLACK			
		WIRE RANGE				CLASS	
		INSULATION				TYPE	
△ 설계사양변경(R0-S7065)큰거 도면재작성 (유리개선GUIDE추가,적용NUT및 NUT GUIDE부 형상변경)		KDJ		---		'07.08.20	
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE
DR.	D.J.KIM 07.03.22	CHK.	---	---	3/28	SEE TABLE	1/1
CHK.		APP.	---	---	3/28	PART NAME	PART NO.
						BH FRT2 CASSETTE BLOCK ASSY	
						MG663594	