

GENERAL TOLERANCE (SILICONE RUBBER)						GENERAL TOLERANCE (HOUSING)							USED ON
0 TO 6	6 TO 10	10 TO 18	18 TO 30	30 TO 50	50 TO 80	10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.4	±0.5	±0.6	±0.8	±1.0	±1.2	±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

주 기

1. 지시하지 않은 반경 R은 0.3으로 한다.
2. 지시하지 않은 모따기 C는 0.3으로 한다.
3. 기능상 유해한 BURR 및 WELDLINE 등이 없을 것.
4. SEAL GASKET 접촉 및 RIB PARTING면에 BURR등이 없을 것.
5. 적용 TERMINAL : ST760521-1(P), ST760795-1(E)
6. 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NOTE

1. UNLESS OTHERWISE SPECIFIED ALL RADII TO BE 0.3 RADIUS.
2. UNLESS OTHERWISE SPECIFIED ALL CHAMFERS TO BE 0.3 CHAMFER.
3. MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
4. FLASH ARE NOT ALLOWED ON CONTACT MOLDED PART OF SEAL GASKET.
5. APPLICABLE TERMINAL : ST760521-1(P), ST760795-1(E)
6. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

NO.	PART NO.	PART NAME	MATERIAL	FINISH	U/S	
①	MG673674-41	RCL B/H WP SINGLE (F:45)	SEE TABLE	SEE TABLE	1	—
②	MG673674-7	RCL B/H WP SINGLE (F:45)	SEE TABLE	SEE TABLE	—	1
③	R600104	RCL B/H WP(F:45)용 SEAL GASKET	SILICONE	BLACK	1	1

ASS'Y PART NO.
MG663672-41
MG663672-7





APPROVED

2021-11-03

**KOREA ELECTRIC
TERMINAL CO., LTD.**
Korea Electric Te
rminal Co., LTD.

ISSUE MARK

						MATERIAL SEE TABLE		 KOREA ELECTRIC TERMINAL CO., LTD.
						FINISH SEE TABLE		
	ECO-2106-018 근거 도면 재작성	SDI	KSC	HYJ	'21.06.02	WIRE RANGE		CLASS
	ECO-1912-170 근거 도면 재작성	KJH	HYJ	CJH	'19.12.12	INSULATION		TYPE
	ECO-1506-266 근거 도면 재작성	SSY	CSH	LSY	'15.06.15	TOLERANCE EXCEPT AS NOTED SEE TABLE		SCALE 1/1
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	PART NO.		MG663672
DR.	HKS, '05.07.04	CHK. 				PART NAME		
CHK.	HSW, 07/05	APP. KKJ, 07/05				RCL B/H WP SINGLE (F:45) ASSY		

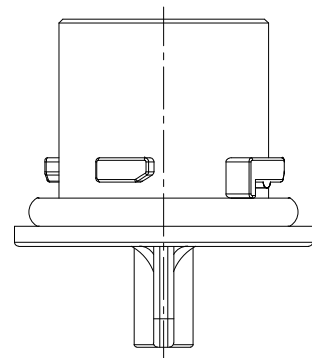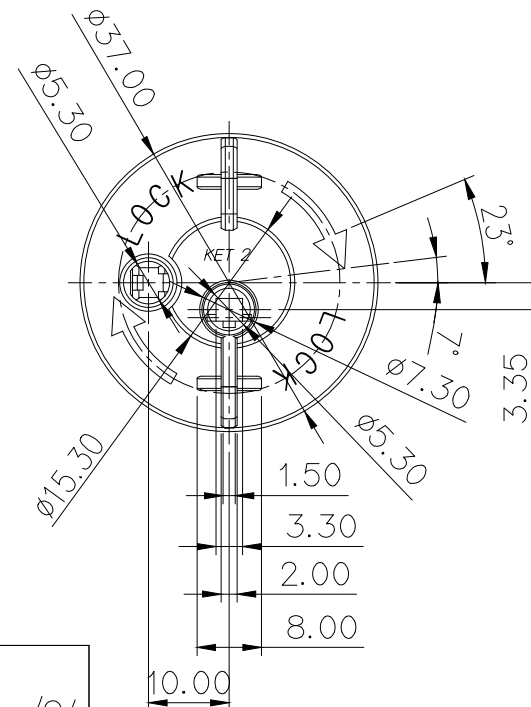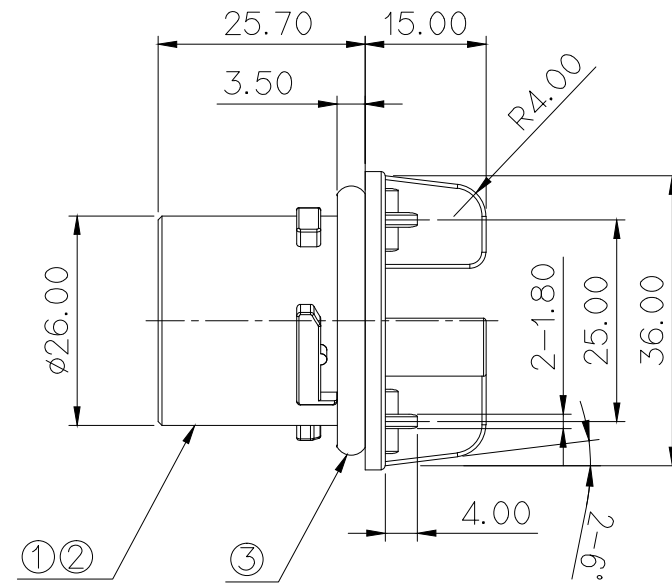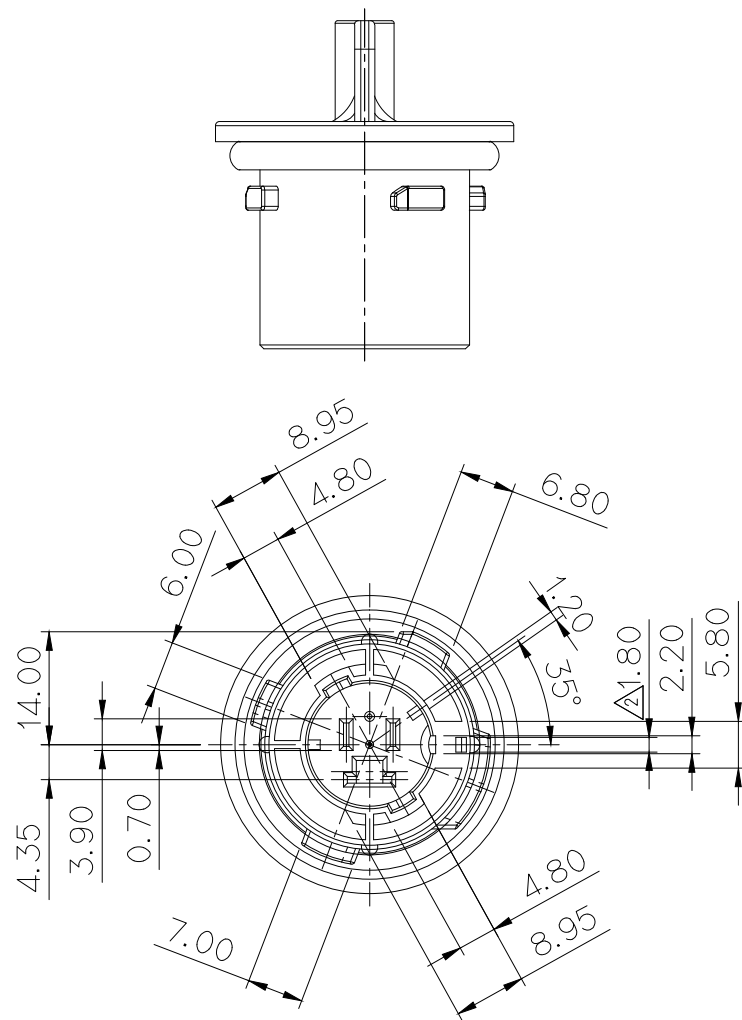

2		
NO.	MATERIAL	COLOR
0	PA6 + MR30%	NATURAL
1		RED
2		BLUE
20		JADE
3		YELLOW
4		GRAY
40		DARK GRAY
41		LIGHT GRAY
5		BLACK
6		DARK GREEN
7		BROWN
8		LIGHT GREEN
9	MAGENTA	
11	ORANGE	

