

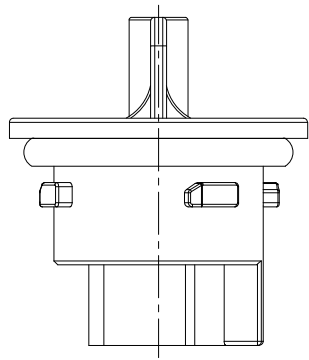
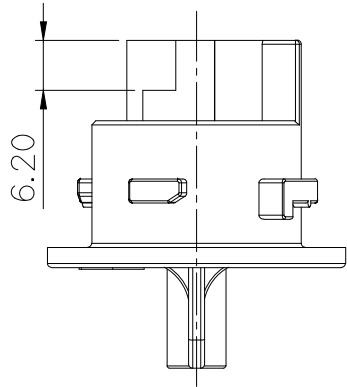
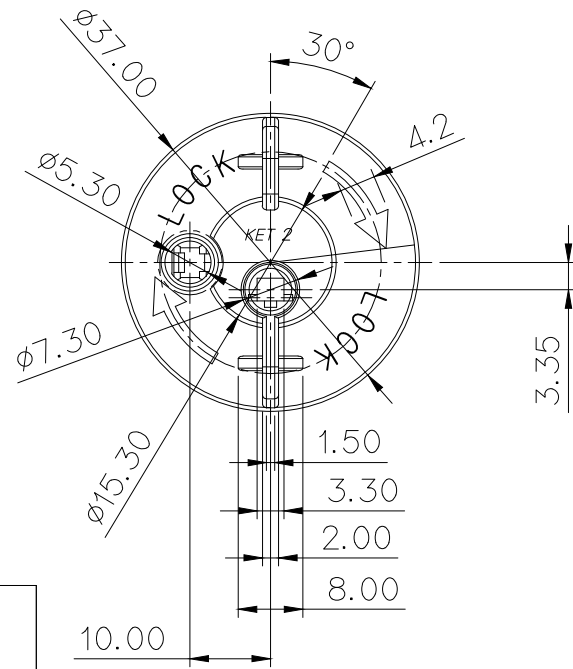




GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

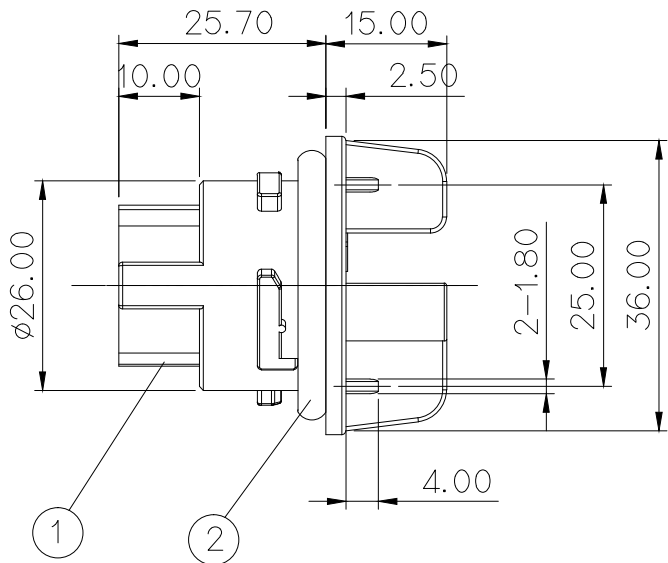

NO.	PART NO.	PART NAME	MATERIAL	FINISH	U/S
1	MG673670	RCL B/H WP SINGLE (F:45-150)	△SEE TABLE	△SEE TABLE	1
2	R60010	RCL B/H WP(F:45)용 SEAL GASKET	SILICONE	BLACK	1

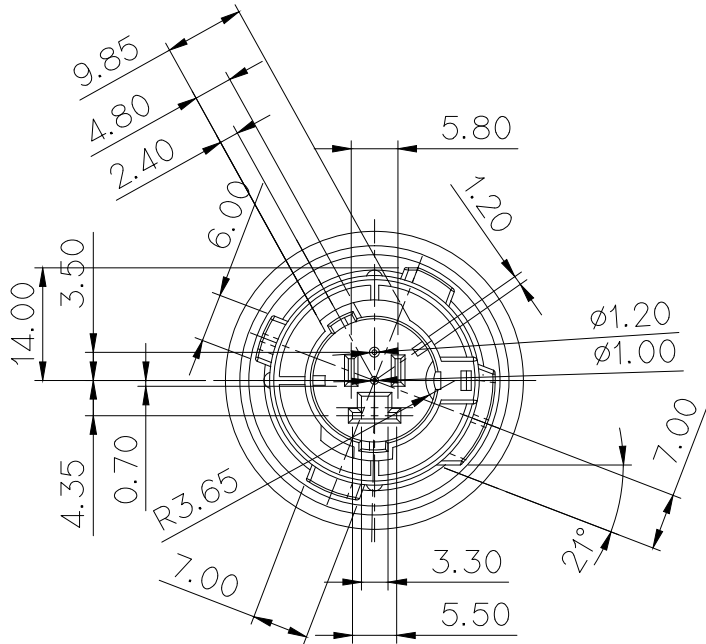

△	NO.	MATERIAL	COLOR
	0	PA66+MR30%	NATURAL
	1		RED
	2		BLUE
	20		JADE
	3		YELLOW
	4		GRAY
	40		DARK GRAY
*	41		LIGHT GRAY
	5		BLACK
	6		DARK GREEN
△ *	7		BROWN
	8		LIGHT GREEN
	9		MAGENTA
	11		ORANGE

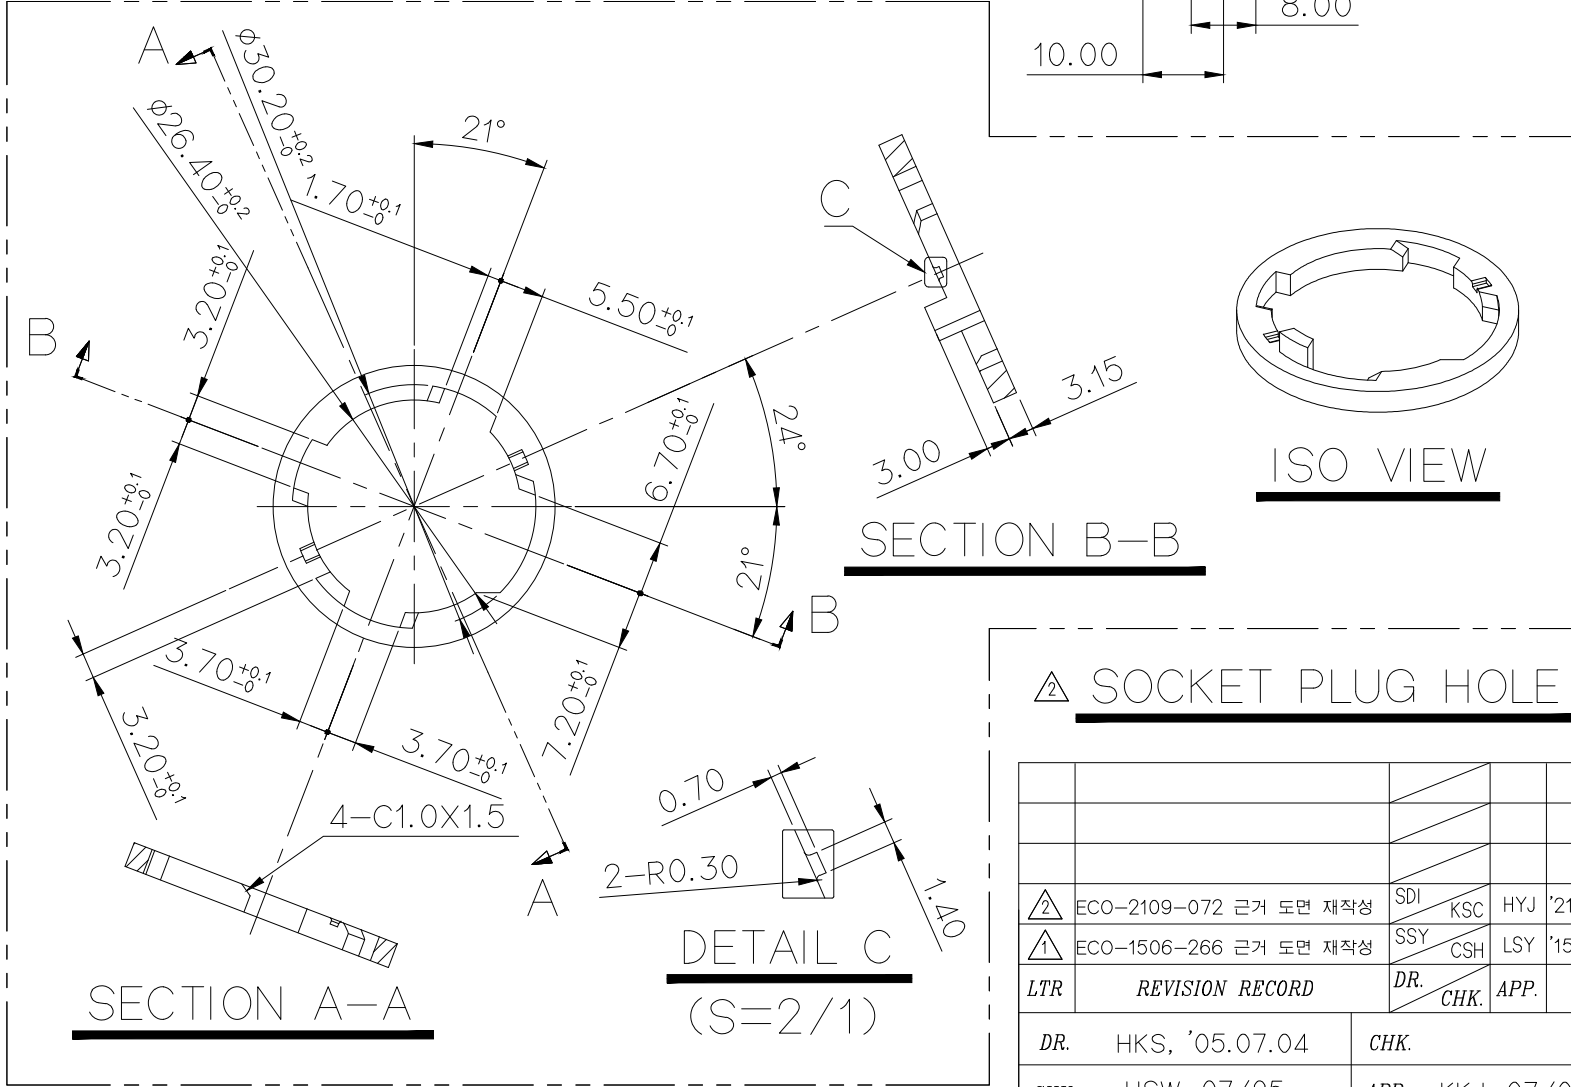

주 기

- 1.지시하지 않은 반경 R은 0.3 로 한다
- 2.지시하지 않은 모따기 C는 0.3으로 한다.
- 3.기능상 유해한 BURR 및 WELDLINE등이 없을것.
- 4.SEAL GASKET 접촉 및 RIB PARTING면에 BURR 등이 없을 것.
- 5.적용 TERMINAL : ST760521-1(P), ST760795-1(E)

△ 6.제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NOTE

1. UNLESS OTHERWISE SPECIFIED ALL RADII TO BE 0.3 RADIUS.
2. UNLESS OTHERWISE SPECIFIED ALL CHAMFERS TO BE 0.3 CHAMFER.
3. MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
4. FLASH ARE NOT ALLOWED ON CONTACT MOLDED PART OF SEAL GASKET.
- 5.APPLICABLE OF TERMINAL ST760521-1(P), ST760795-1(E)

△ 6.6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.



ISSUE MARK

△ SOCKET PLUG HOLE

						MATERIAL		SEE TABLE	 KOREA ELECTRIC TERMINAL CO., LTD.	
						FINISH		SEE TABLE		
						WIRE RANGE		CLASS		
						INSULATION		TYPE		
	ECO-2109-072	근거 도면 재작성	SDI	KSC	HYJ	'21.09.08	TOLERANCE EXCEPT AS NOTED		SCALE 1/1	PART NO. MG663673
	ECO-1506-266	근거 도면 재작성	SSY	CSH	LSY	'15.06.15				
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	SEE TABLE			
DR.	HKS, '05.07.04		CHK.							
CHK.	HSW, 07/05		APP.			RCL B/H WP SINGLE (F:45-150°) ASSY				