
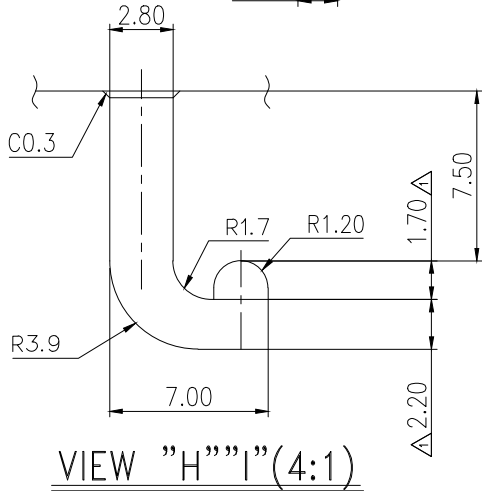
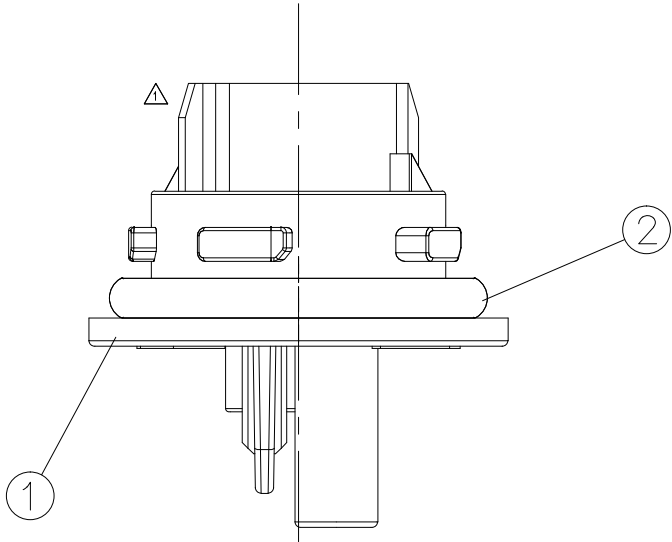
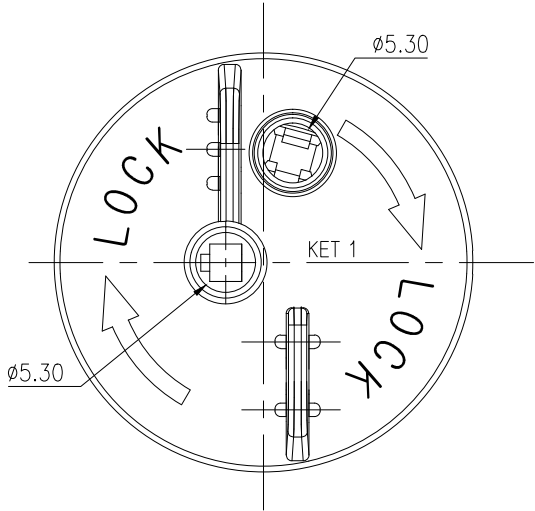
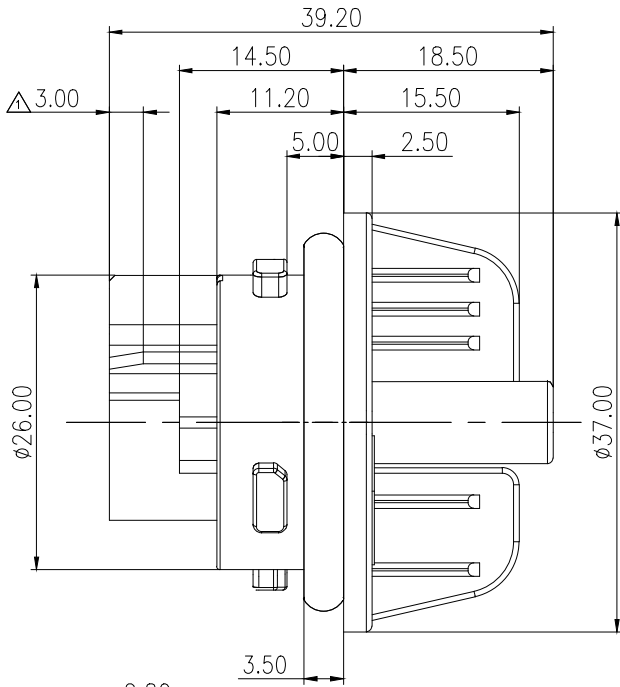
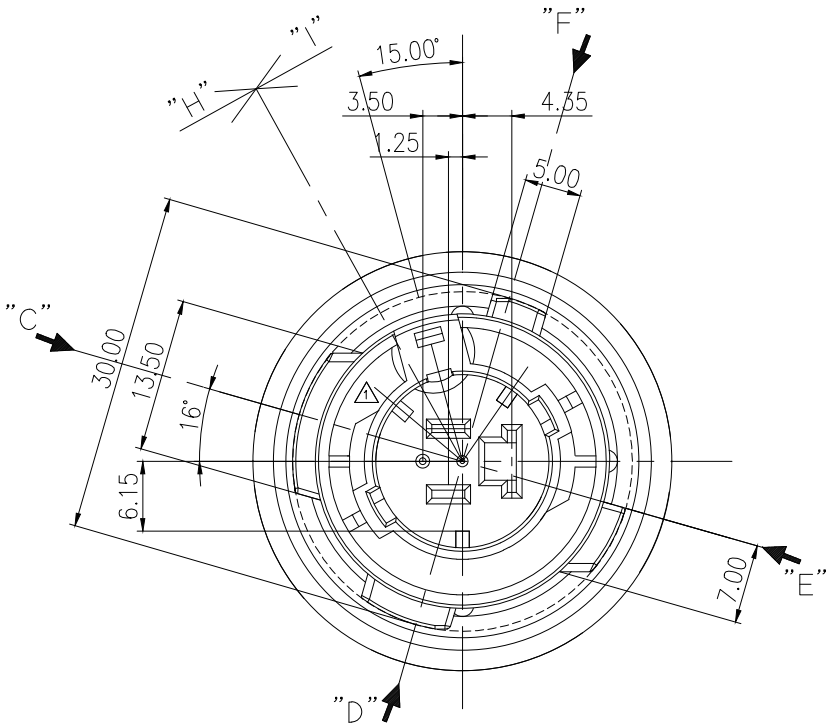
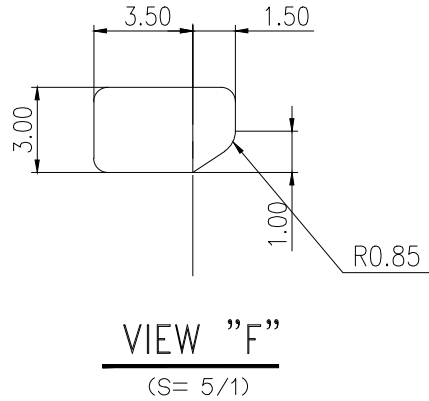
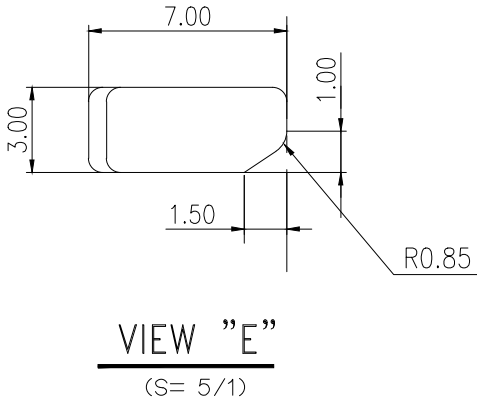
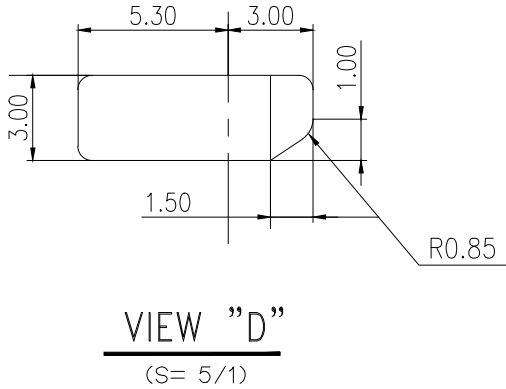
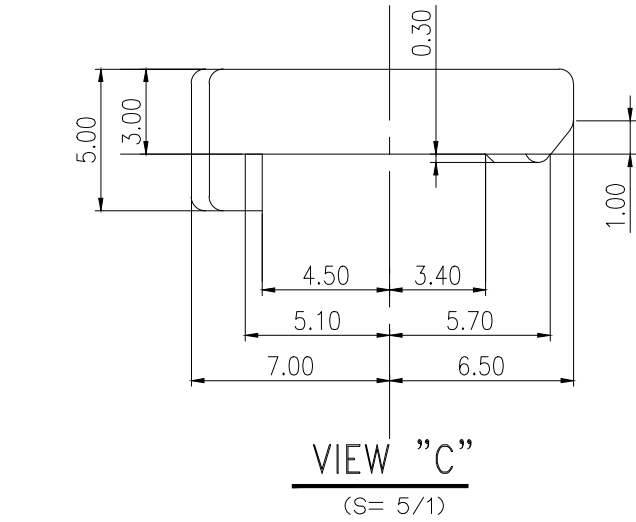


GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

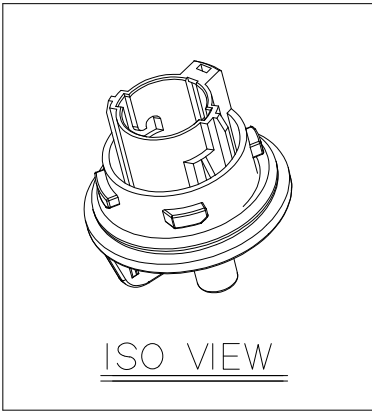

ASSY PART NO
MG664098-7
MG664098-41

NO.	PART NO.	PART NAME	MATERIAL	FINISH	U/S	U/S
1	MG674096-41	RCL B/H WP SINGLE (F:40-180°)	NYLON66 + MR30%	L/GRAY	1	-
2	MG674096-7			BROWN	-	1
3	R600104	RCL B/H WP(F:45) 8 SEAL GASKET	SILICONE	BLACK	1	1

						MATERIAL	SEE TABLE	KIET KOREA ELECTRIC ENGINEERED TERMINAL CO., LTD.
						FINISH	SEE TABLE	
						WIRE RANGE	CLASS	
						INSULATION	TYPE	
	ECO-1504-106 근거 도면 제작성	CJH	SSH	BIN	'15.04.08			
	ECO-1406-129 근거 도면 제작성	NKT	SSH	BIN	'14.06.18			
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE 2/1	PART NO. MG664098-41, MG664098-7
DR.	CYJ, '07.12.21	CHK.				PART NAME RCL B/H WP ASS'Y (SINGLE-F:40-180°)		
CHK.		APP.						

주 기

- 적용 TERMINAL : ST760521-1(P), ST760795-1(E)
- 적용 WIRE SEAL : MG682028
- 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NOTE

- APPLICABLE OF TERMINAL
ST760521-1(P), ST760795-1(E)
- APPLICABLE OF WIRE SEAL : MG682028
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

APPROVED

2016-02-25

KOREA ELECTRIC
TERMINAL CO., LTD.
Connector Develop
ment Team 3

ISSUE MARK