

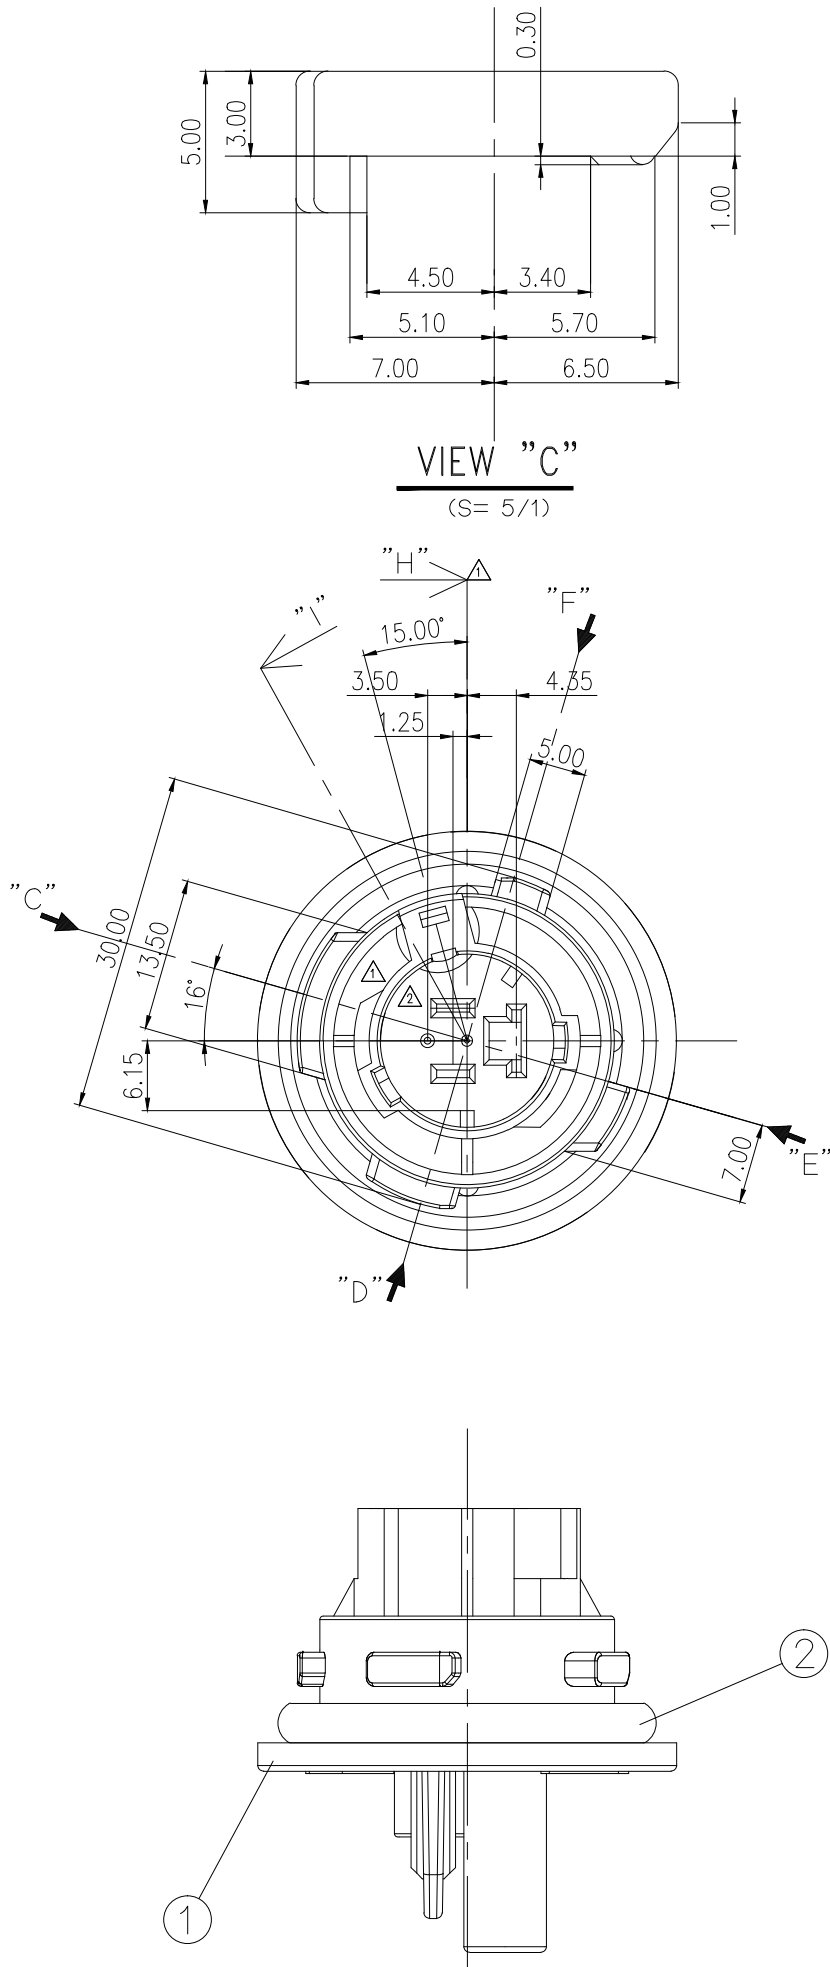


VIEW "D"
(S= 5/1)

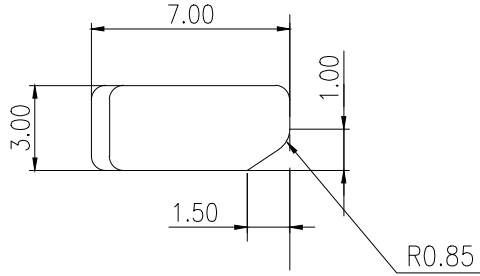

VIEW "E"
(S= 5/1)

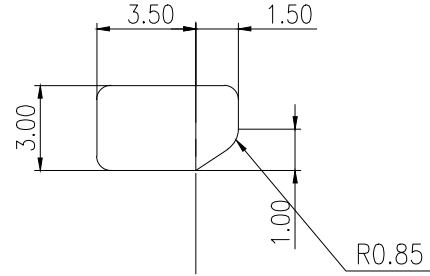

VIEW "F"
(S= 5/1)

GENERAL TOLERANCE (HOUSING)										USED ON
10MAX	30MAX	50MAX	70MAX	100MAX	120MAX	250MAX	250VR	ANGLE	ECCENT	
±0.15	±0.20	±0.30	±0.40	±0.50	±0.75	±0.90	±1.4	±30'	0.1	






주 기

- 적용 TERMINAL : ST760521-1(P), ST760795-1(E)
- 적용 WIRE SEAL : MG682028
- 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NOTE

- APPLICABLE OF TERMINAL
ST760521-1(P), ST760795-1(E)
- APPLICABLE OF WIRE SEAL : MG682028
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

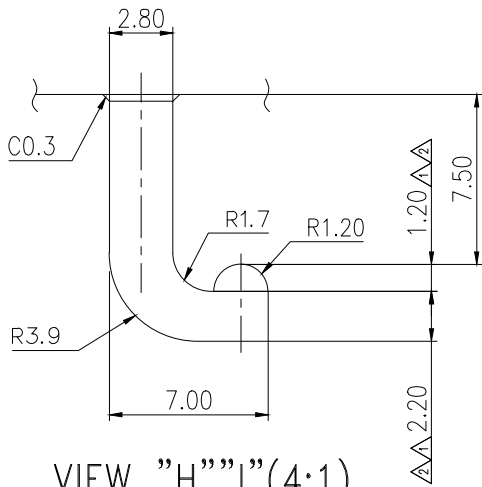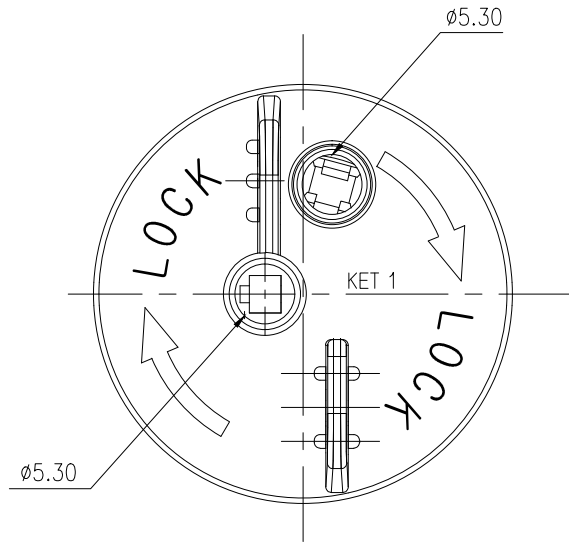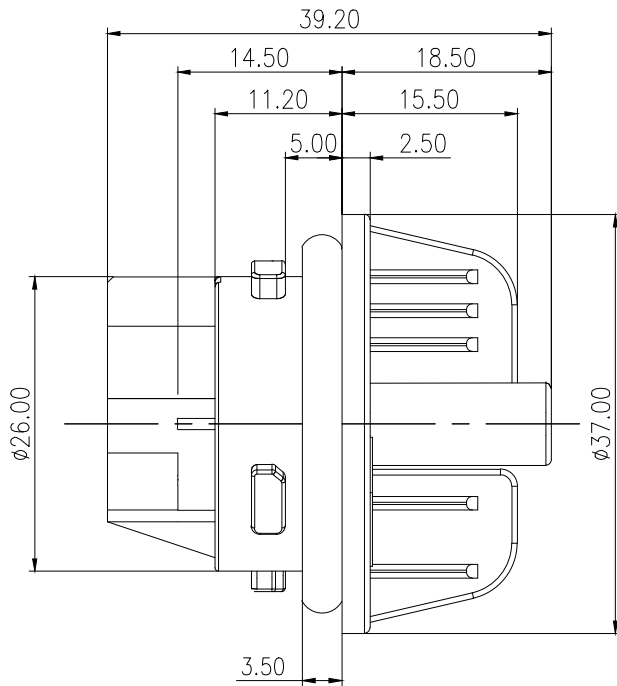

VIEW "H" "I" (4:1)

NO.	PART NO.	PART NAME	MATERIAL	FINISH
1	MG674097-7	RCL B/H WP SINGLE (F:40-150°)	NYLON66 + MR30%	BROWN
2	R600104	RCL B/H WP(F:45) & SEAL GASKET	SILICONE	BLACK

						MATERIAL		SEE TABLE	 KOREA ELECTRIC  TERMINAL CO., LTD.
						FINISH		SEE TABLE	
						WIRE RANGE			CLASS
						INSULATION			TYPE
	ECO-1408-017	근거 도면 재작성	NKT	SSH	BIN	'14.08.18			
	ECO-1406-129	근거 도면 재작성	NKT	SSH	BIN	'14.06.18			
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE 2/1	PART NO. MG664099-7
DR.	CYJ, '07.12.21		CHK.		PART NAME				
CHK.			APP.		RCL B/H WP ASS'Y (SINGLE-F:40-150°)				

APPROVED
2016-03-11
KOREA ELECTRIC
TERMINAL CO., LTD.
Connector Develop
ment Team 3

ISSUE MARK