
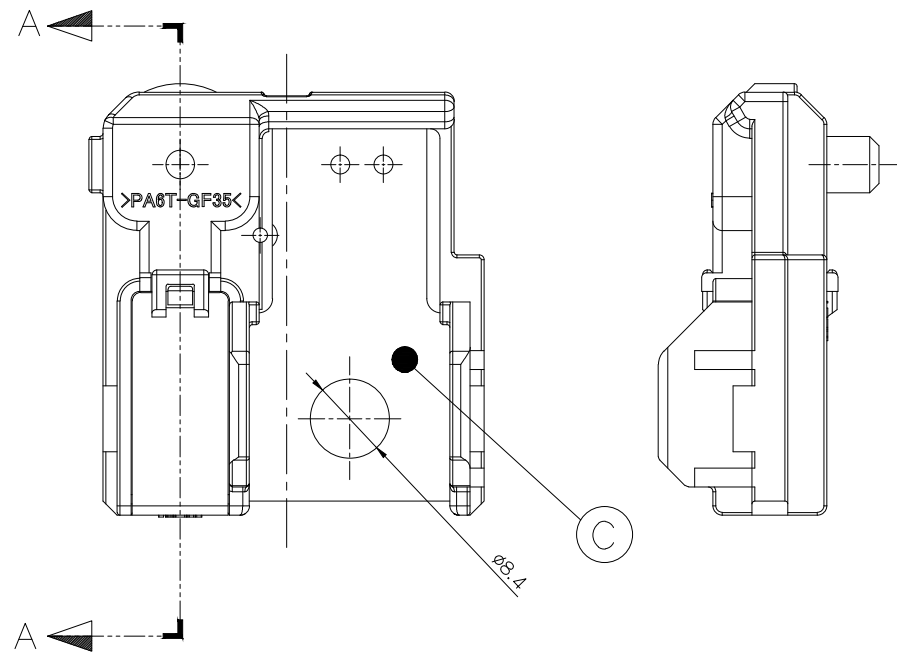


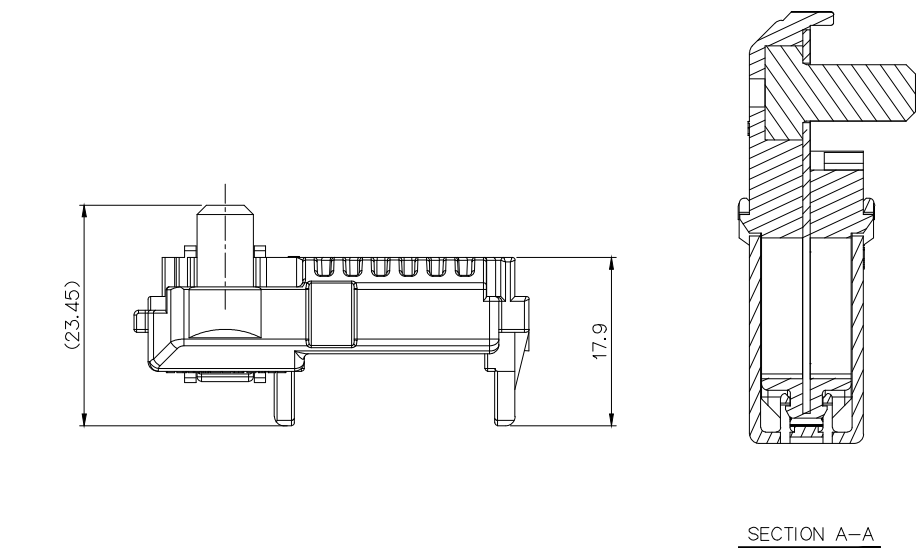


NO.	PART NAME	MATERIAL	FINISH
△ (A)	BFT 1P MAIN BODY	PA6T	BLACK
(B)	BFT 1P ELEMENT COVER	PES	투명 BROWN
△ (C)	BFT 1P BUS-BAR	COPPER ALLOY	PRE-TIN
△ (D)	M6 BOLT	STEEL	PFZnNi5

YYMMDDHH


년도 월 일 시간

△ DETALE "Z"
(S= 5/1)

SECTION A-A

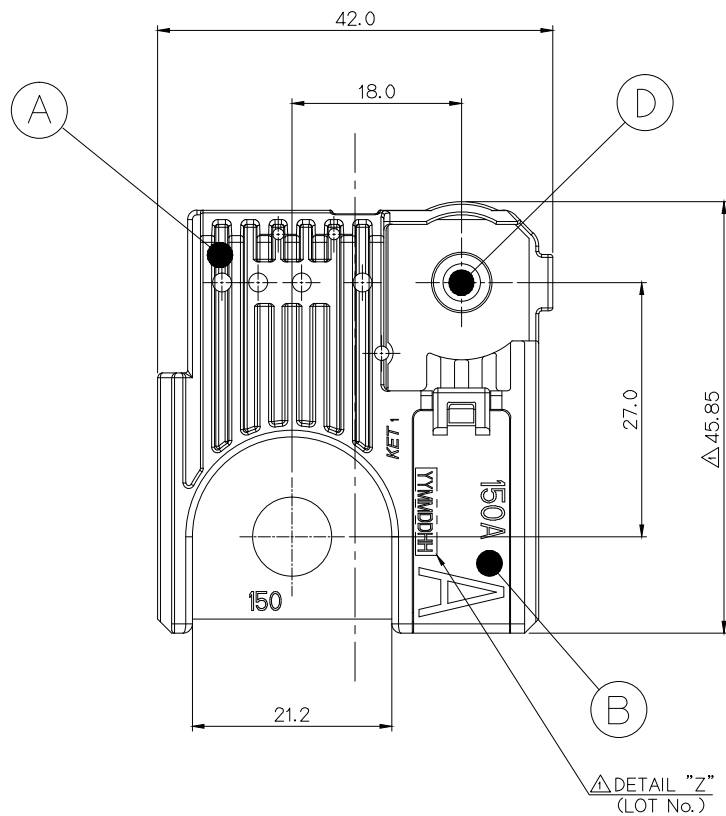

GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

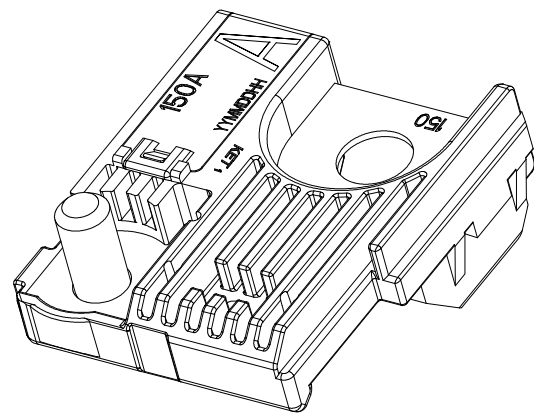

ISO VIEW

주 기

- 기능상 유해한 BURR 및 FLASH 등이 없을것.
- 아래의 규격을 만족할 것.
 - 일반공차 : ES05206-00(보통치수 허용차-MOLD(2급))
 - 중금속 : MS201-02(자동차 부품 및 재료의 중금속 사용 금지)
- △ 3) ES91872-00(전장품 BFT 1P 평가규격)
- △ 4) M6 BOLT TORQUE : 0.8Kgf - 1.2Kgf

NOTE

- MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- MUST MEET BELOW SPEC.
 - GENERAL TOLERANCE : ES05206-00 (MOLD PARTS-2ND)
 - HEAVY METAL : MS201-02 (PROHIBITION OF USE OF HEAVY METAL FOR AUTOMOTIVE PARTS)
- △ 3) ES91872-00 (THE TEST SPECIFICATION FOR AUTOMOTIVE BFT 1P)
- △ 4) M6 BOLT TORQUE : 0.8Kgf - 1.2Kgf



ISSUE MARK

				MATERIAL	SEE TABLE	KET KOREA ELECTRIC ENGINEERED TERMINAL CO., LTD.	
				FINISH	SEE TABLE	CLASS	FUSE
△	스택변경	KJK	KMK	BHS	30.JUL.'09	WIRE RANGE	
△	형상변경 및 각인,추가,물론 도금사양 추가	CMS	BHS	KH	11.MAR.'09	INSULATION	
△	RELEASE	CMS	BHS	KH	30.MAY.'08	SCALE	2/1
DR.	REVISION	RECORD	DR.	CHK.	APP.	DATE	PART NO.
CHK.							MG664457
				PART NAME			
				BFT 1P ASSEMBLY(150A)			