
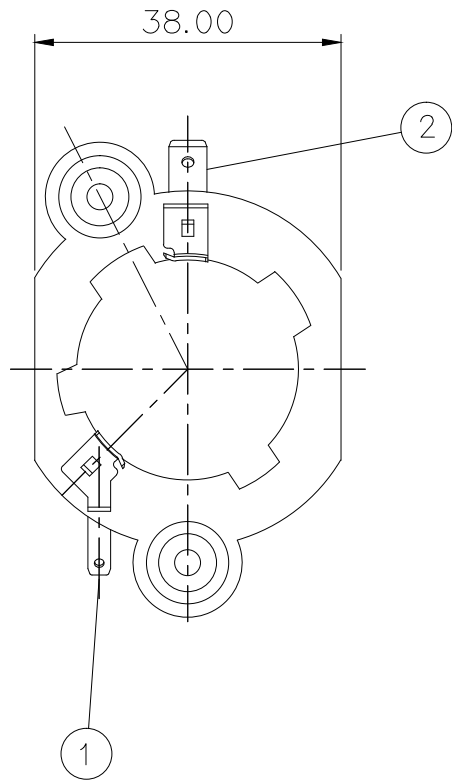
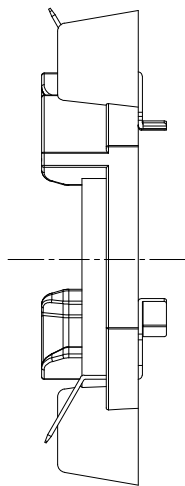
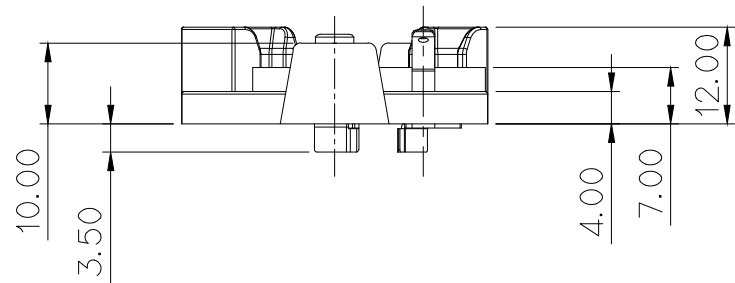


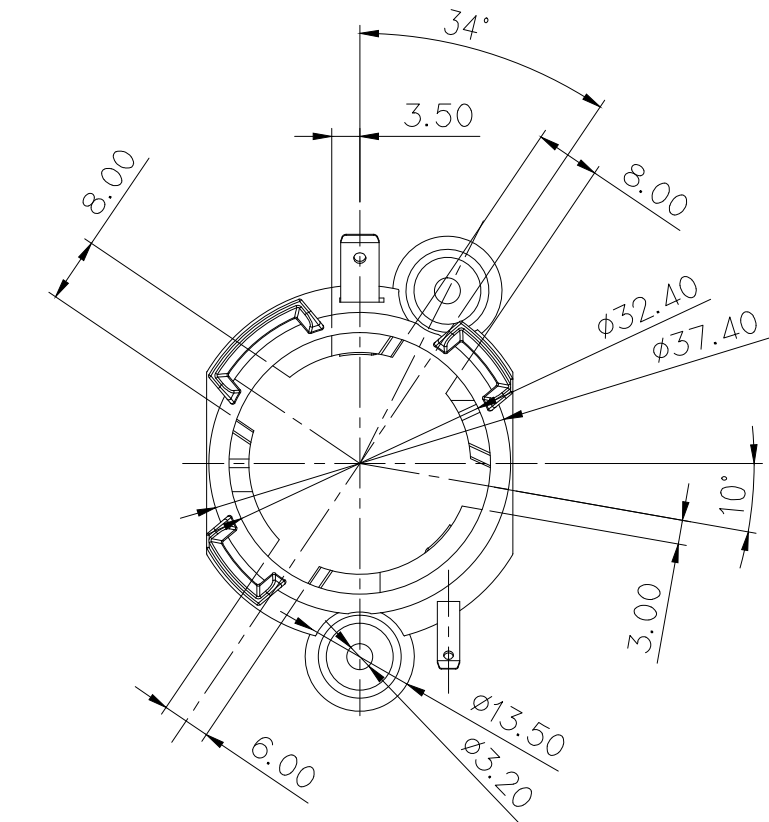

NO.	PART NAME	MATERIAL	Q'TY	FINSH
1	T/S B/H 110 WIRE EARTH TM'L	BRASS	1	PRE-TIN
2	T/S B/H 187 WIRE EARTH TM'L	BRASS	1	PRE-TIN

GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

주 기

- 1.지시하지 않은 반경 R은 0.5 로 한다.
- 2.지시하지 않은 모따기 C는 0.3으로 한다.
- 3.기능상 유해한 BURR 및 WELDLINE 등이 없을 것
- 4.적용 BULB HOLDER : MG663070
- 5.APPLICABLE OF TERMINAL : ST730052, ST730245
6. 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NOTE

1. UNLESS OTHERWISE SPECIFIED ALL RADII TO BE 0.5
2. UNLESS OTHERWISE SPECIFIED ALL CHAMFERS TO BE C0.3
3. MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
- 4.APPLICABLE OF BULB HOLDER : MG663070
- 5.APPLICABLE OF TERMINAL : ST730052, ST730245
6. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.



ISSUE MARK

						MATERIAL PA66+GF15%		 KOREA ELECTRIC TERMINAL CO., LTD.	
						FINISH BLACK			
						WIRE RANGE			
						INSULATION			
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE 1/1	PART NO. MG664677-5
DR.	H.S.KIM	09.01.22	CHK.	S.H.HEO		09.01.22	PART NAME		
CHK.	Y.S.JUNG	09.01.22	APP.	K.J.KIM		09.01.22	T/SIGNAL B/H BRACKET LMS(SINGLE)		